
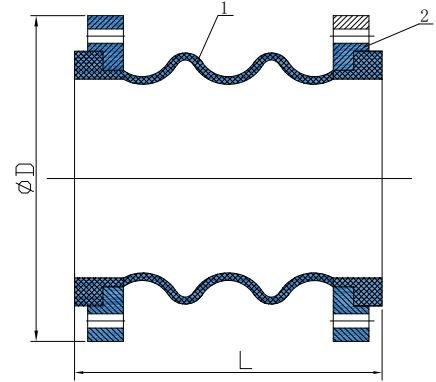


Double Ball Connector With Flange

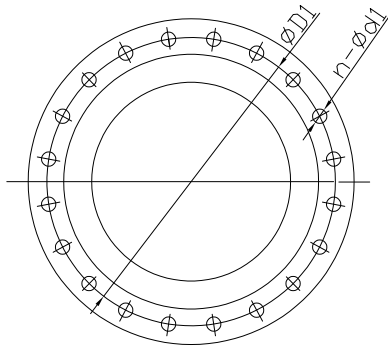

- **Type:**
Flange
- **Face to Face:**
API609,BS5155,DIN3202,IS05752
- **Flange:**
DIN,BS,UNI,ISO, ANSI, AS,JIS
- **Mounting Flange:**
ISO5211
- **Working Pressure:**
PN16(200PSI)
- **Appliaction:**
HVAC,Water Supply&Sewage,
Food&Beverage,Chemical/
petrochemical/processing,
Power and Uilities,Paper
and Pulp,Ship Building.

STANDARD MATERIALS OF MAIN PARTS

ITEM	PART NAME	MATERIAL
1	Sphere	EPDM/NBR
2	Flange	CS

DIMENSIONS:(mm)

SIZE		L	Axial disolacement		Latearal disolacement	Pn16			Pn10		
in	DN		Stretch	Compression		D	D1	n-d1	D	D1	n-d1
2	50	165	30	50	45	165	125	4-18	165	125	4-18
2.5	65	175	30	50	45	185	145	4-18	185	145	4-18
3	80	175	35	50	45	200	160	8-18	200	160	8-18
4	100	225	35	50	40	220	180	8-18	220	180	8-18
5	125	225	35	50	40	250	120	8-18	250	210	8-18
6	150	225	35	50	40	285	240	8-23	285	240	8-23
8	200	325	35	50	40	340	295	12-23	340	295	8-23
10	250	325	35	60	35	405	355	12-27	395	350	12-23
12	300	325	35	60	35	460	410	12-27	445	400	12-23
14	350	325	35	60	40	520	470	16-27	505	460	16-23
16	400	325	35	50	40	580	525	16-30	565	515	16-27