




### Silent Check Valve

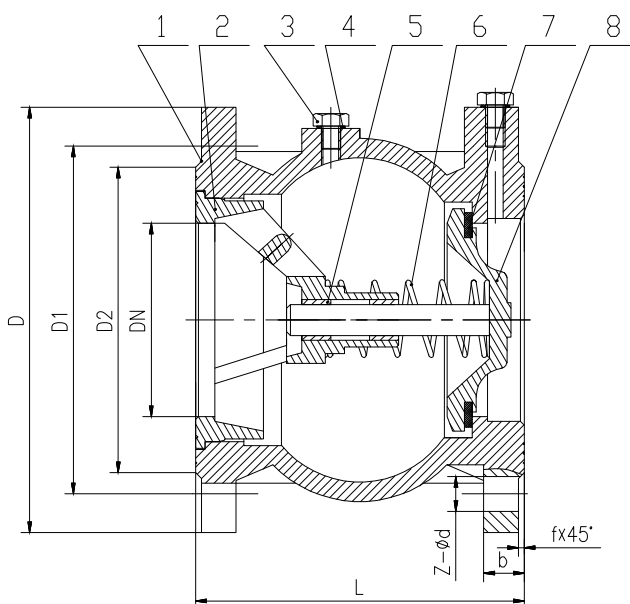

- **Type:**  
Flange
- **Face to Face:**  
API609,BS5155,DIN3202,ISO5752
- **Flange:**  
DIN,BS,UNI,ISO, ANSI, AS,JIS
- **Mounting Flange:**  
ISO5211
- **Working Pressure:**  
PN16(200PSI)
- **Appliaction:**  
HVAC,Water Supply&Sewage,  
Food&Beverage,Chemical/  
petrochemical/processing,  
Power and Utilities,Paper  
and Pulp,Ship Building.

### STANDARD MATERIALS OF MAIN PARTS

NO	PART NAME	MATERIAL
1	Body	Gg25
2	Guide pulley	Ggg40
3	Plug	Brass
4	O Ring	Rubber
5	Guide Sleeve	Brass
6	Spping	Stainless Steel
7	Gasket	Rubber
8	Disc	Ggg40

### DIMENSIONS:(mm)

DN	50	65	80	100	125	150	200	250	300
L	100	120	140	170	200	230	288	354	410
D	165	185	200	220	250	285	340	405	460
D1	125	145	160	180	210	240	295	355	410
D2	102	122	138	158	188	212	268	320	378
b	20		22	24	26		30	32	
f	3								4
Z-d	4-18		8-18			8-23	12-23	12-27	