


miniwell

# SHOWER FILTER

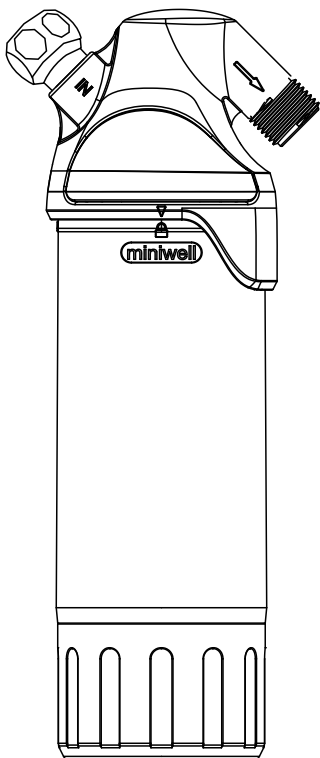


L720-Plus & L720-Plus-X

Installation and replacement Instructions



## Product Illustration



Model	Accessories
L720-Plus	 <p>Wrench</p>
L720-Plus-X	 <p>Wrench</p>  <p>Elbow connector</p>

## Specification

Product name	Shower filter
Product Size	L90 x W80 x H250 mm
Filter weight	500g
Filtration media	PP Cotton Filter Composite ACF Filter
Shell Material	ABS (Food grade)
Outlet water flow	2.0 GPM
Filtered capacity of Chlorine	13,000 gallons (The blockage is easily caused if the water quality is poor.)
Operating pressure range	15-80 PSI
Operating temperature range	5-60°C (41-140°F)
Outlet thread specification	G1/2
Operative Norm	Q/(GZ)GZLQ002-2017


## Attention

- 1 This system is not suggested to use for other purpose except for shower filtration.
- 2 Do not use with water that is microbiologically unsafe or of unknown water quality without adequate disinfection before or after the system.
- 3 Whether the local water quality meets the standard of drinking water should follow the guidelines of the local water bureau. However, this system is not for use as a drinking water treatment unit, if necessary please boil before drinking.


## A. Installation for L720-Plus

### Method 1 (For normal shower head)


- 1 Turn off the source, remove your existing shower head from the water supply pipe.

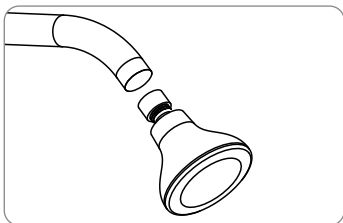

- 2 Attach the shower filter body to the water supply pipe at the side with the chrome collar, turn clockwise to tighten until the filter system retains a firm position.

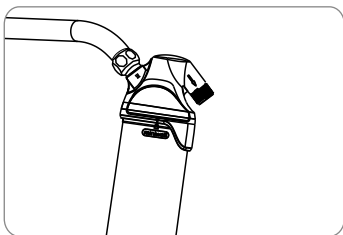


- 3 Attach the shower cradle or shower head to the shower filter body.

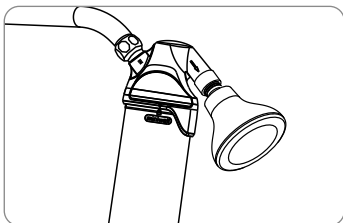

## Method 2 (For shower head combo)


1

Attach the shower filter to the water supply pipe

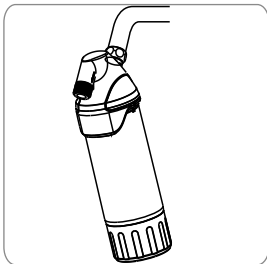


2

Adjust the position of the filter and the shower head combo in the opposite direction, and use their dislocation space to connect them.

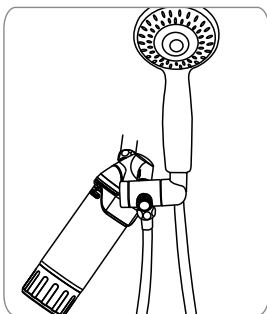


3

Adjust the whole unit to a comfortable showering position.

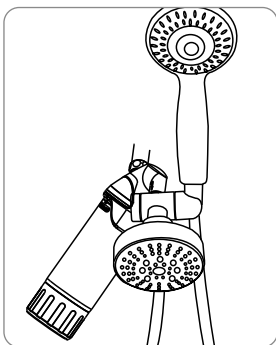


### Method 3 (For large shower head)


- 1 Pull out the filter body, and attach the filter cap to the water supply pipe.

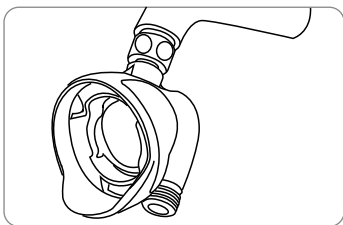

- 2 Connect the shower head with the filter cap firstly, then adjust the position and insert the filter body.

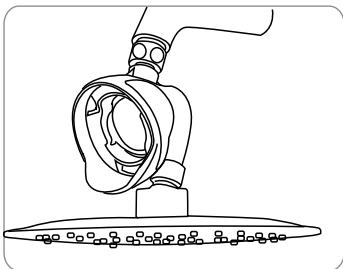


- 3 Adjust the whole unit to a comfortable showering position.

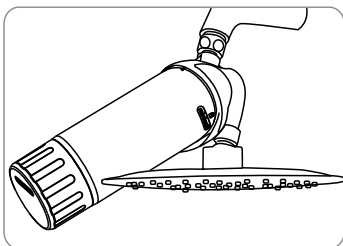


**Attention: How to insert / remove the filter body?**

Twist the filter body in a counterclockwise direction to align the triangle marks, then remove from the shower filter cap.

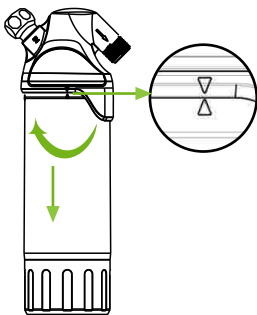


Align the triangle marks, then install the filter body and rotate 90 degrees clockwise to the locking mark.

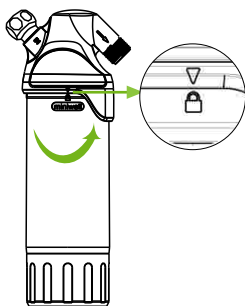


## B. Installation for L720-Plus-X


- 1 Attach the connector to the water supply pipe and turn clockwise to tighten by wrench.

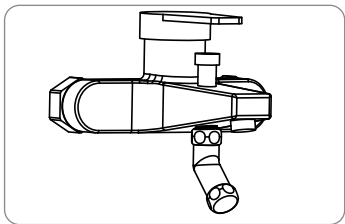

- 2 Discharge the filter cartridge, and attach the filter head to the connector and tighten by wrench.

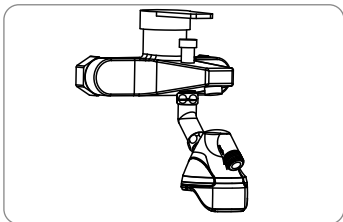


- 3 Install the cartridge, adjust the whole set placement at the side of water inlet to show the replacement reminder.

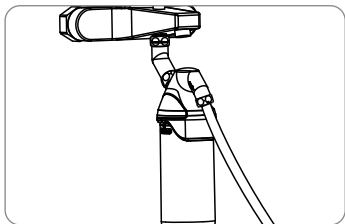




## Other similar installation for L720-Plus

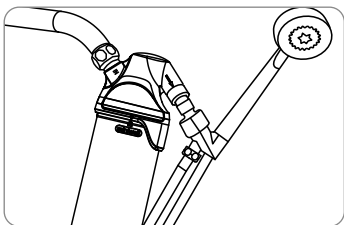

## Other similar installation for L720-Plus-X

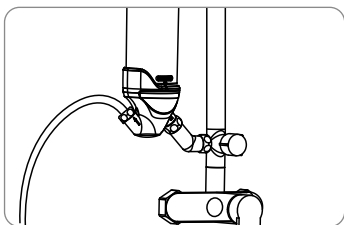

### Notices:

- When leakage occurring around the connector, unscrew the chrome collar from pipe, reinstall the washer and reconnect the shower pipe.
- Whether the filtered water goes through the top gush or not is determined by the structure of showering wares.
- Do not use a shower head or wand with a shut-off valve.


## Cartridge replacement

After unscrewing the filter base , please replace the composite filter as required, or replace the PP cotton filter individually.

## Replacement Filters Combination

### 1. Composite filter

- \* Please replace the filter when the replacement reminder indicates the existing cartridge is ending.
- \* Lifetime is about 180 days, but the blockage is easily caused if the water quality is poor. When the clogging situation occurs or the water pressure keeps smaller even after replacing the PP cotton filter , please replace the composite filter.



### 2. PP Cotton filter

Lifetime is about 180 days, but the blockage is easily caused if the water quality is poor. Please replace this filter when clogging occurs or the water pressure becomes smaller.



## When to change the sticker on the replacement reminder?

According to the first using date of COMPOSITE FILTER, select the appropriate month number (6 months later) and stick it on the replacement reminder.



## How to do when clogging or low water pressure?

Please replace the PP cotton filter firstly. If not workable, please replace the composite filter.

### Declaration:

This shower filter is designed and tested for use with genuine Miniwell parts, including replacement filters and all hardware. Use parts from other manufacturers may result in loss of contaminant reduction performance, system damage or failure.

This system and installation shall comply with applicable country and local regulations.

### Q&A:

Q: Can this shower filter remove the TDS?

A: No, it is designed to remove the chlorine, THMs, unpleasant odor and taste, but it will not reduce the TDS.

Q: Should I change both of the two filter cartridges at the same time?

A: No need to replace them all, just change the proper one individually according to the manual. General speaking, please try to replace the PP cotton filter firstly, if it still does not work or increase the water pressure, please change the composite filter.

Q: Can this system get rid of the chloramine?

A: No, it only removes the chlorine, instead of chloramine.

## After-sales service card

User name		Contact tel.	
Purchase date		Sales store	
Contact Email			
Product serial No.			
<b>After-sales service:</b> <ul style="list-style-type: none"><li>- Lifetime guarantee: it covers all defects in materials or workmanship in manufacturing of the shower water filter systems except filter cartridges.</li><li>- Money-back guarantee: If the filtered water is tested to turn yellow by the residual chlorine reagent, Miniwell promise to pay back your money within 120 days from the date of your purchasing.</li></ul>			
<b>Detailed terms:</b> <p>To receive the above services, please contact by email <a href="mailto:service@miniwell.net">service@miniwell.net</a> within the valid period to describe the problem to our customer service representatives, who will revert to you within 2 working days.</p>			
Guangzhou Lanquan Household Electrical Appliance Co., Ltd.			

(Remark: Final interpretation is owned by our company.)

Guangzhou Lanquan Household Electrical Appliance Co., Ltd.  
Address: No.16, Hongmian Road, Jinkeng industrial Park, Xingnan Avenue, Nancun Town, Panyu District, Guangzhou, Guangdong, China  
Website: [www.miniwell.net](http://www.miniwell.net)