

miniwell

MINIWELL SHOWER FILTER

Installation Instruction

L730 Series



Product Illustration:



Specification:


Product name	Shower filter
Model	L730 Series
Product Size	DIA 63 X 150 MM
Filter weight	About 180g
Filtration media	PP cotton filter Carbon fiber Nano Deoxidization media
Filter Shell	PP (Food grade)
Outlet water flow	2.0 GPM
Filtered capacity	8,000 gallons
Operating pressure rang	15-80 PSI
Outlet thread specification	G1/2

Attention:

- 1 Do not use with water that is microbiologically unsafe or of unknown water quality without adequate disinfection before or after the system.
- 2 This system is not for use as a drinking water treatment unit.

A. General Installation

- 1) Turn off the source, remove your existing shower head from the water supply outlet.



- 2) Attach the shower filter body to the water supply outlet, turn clockwise to tighten until the filter system retains a firm position.



- 3) Attach the shower head to the filter body.




Notice:


- A. When leakage occurring, reinstall the filter and reconnect the shower pipe or shower head.

B.Wand Installation


- 1) Attach the wand cradle to water supply pipe and install the filter body.



- 2) Assemble the hose, Screw one end with the filter, and attach the other into the shower wand.




- 3) Place wand into cradle, adjust cradle to desired position.



B. It is determined by the structure of shower system that whether the filtered water goes through the top spray shower head or not.


Other Applications




Before




After



Before



After




Before




After

C. Special Installation

Considering the limited space in some cases, please attach the corrugated pipe to the water supply outlet firstly, adjust it to the proper position, then attach the filter body and tighten.



Before




After


About The Backwash

Due to the filtered pollutants and impurities increasing, when the water flow becomes smaller, the backwash should be applied to clean up the shower filter. Method as followed:

1. Remove the filter body from the wand cradle.

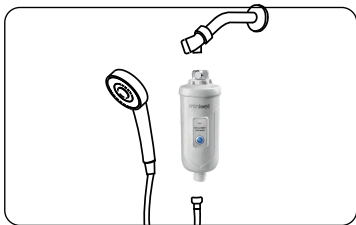

2. Install the filter body in the opposite direction to the shower water hose.

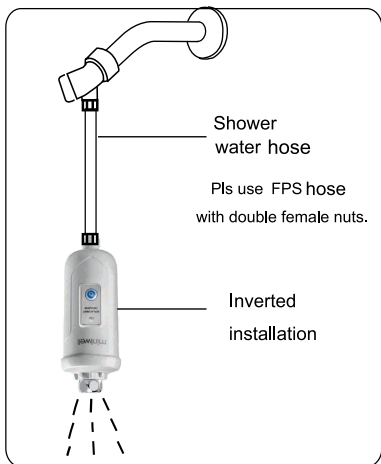

3. Turn on the water for 2-3 minutes until the filtered water is clear.

Notice:

The first backwash will achieve the best cleaning results, the subsequent effect will be getting weak as the impurity accumulating. Please use the new filter when the backwash takes no effect.

Declaration

the shower filter is designed and tested for use with genuine Miniwell parts. Use parts from other manufacturers may result in loss of contaminant reduction performance, system damage or failure. In addition, this system and installation shall comply with applicable country and local regulations.

After-sales service card

User Name		Contact Tel.	
Purchase Date		Retail Store	
Contact Email			
Product Serial No.			

After-sales service:

- . Lifetime guarantee: it covers all defects in materials or workmanship in manufacturing of the shower water filter systems.
- . Money-back guarantee: If the content of residual chlorine in the filtered water is over 0.2ppm, Miniwell promise to pay back your money within 90 days from the date of your purchasing.

Detailed terms:

To receive the above services, please contact by email service@miniwell.net within the valid period to describe the problem to our customer service representatives, who will revert to you within 2 working days.

(Remark: Final interpretation is owned by our company.)

Manufacturer: Guangzhou Lanquan Household Electric Appliance Co., Ltd.

Address: No. 6, Jin keng guang xing hong mian Road, Nancun Town, Panyu District, Guangzhou, Guangdong, China (Mainland)

Website: www.miniwell.net