

miniwell

FILTERED SHOWER HEAD

L750 Series

Installation Instruction



Product Illustration

304 Stainless Steel panel
(With 0.4mm outlet holes)

Filter Cartridge

Replacement Indicator


Visual window
(Monitor the filtering effect)

Water Inlet
(Attach to the water supply hose)



About the water-saving valve

If the water pressure is too large,
please install the water-saving
valve into the filter inlet to make
it soft (please pay attention to the
installation direction)



Attention

1. This system is not suggested to use for other purpose except for shower filtration.
2. Do not use with water that is microbiologically unsafe or of unknown water quality without adequate disinfection before or after the system.

Specification

Product name	Filtered Shower Head
Product model	L750 Series
Product size	255 x 86 x 65 mm
Filtration media	PP Cotton Filter Composite ACF Filter
Shell Material	ABS (Food grade)
Operating pressure range	15-80 PSI
Operating temperature range	5-60°C (41-140*)
Outlet water flow	2.0 GPM
Filtered capacity of Chlorine	8000 gallons (Please install the cartridge upside down or replace the new one if clogged situation or low water pressure occur)
Outlet thread specification	G1/2
Operative Norm	Q/(GZ)GZLQ002-2017

Installation Steps

1. Attach the shower cradle to the water supply pipe.




- 2) Screw one end of the water hose onto the bracket, and attach the other into the shower head.
- 3) Place the shower head into cradle, adjust cradle to desired position.




Cartridge replacement


1. Turn off the source and remove the existing cartridge from the shower head.

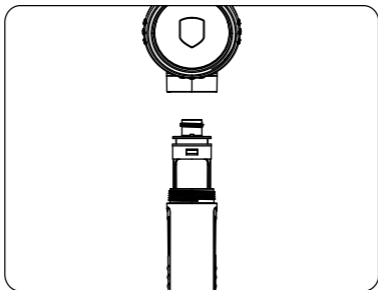

2. Insert the filter cartridge in the positive direction, keep the visual window to show the filtering effect clearly.

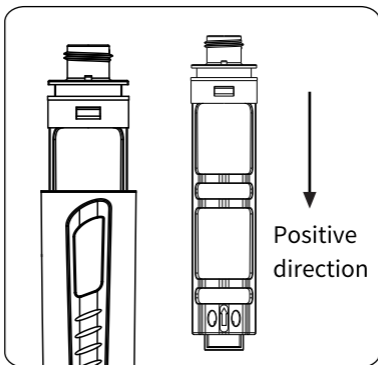


3. According to the first using date, select the appropriate month number(6 months later) and stick on the replacement indicator window (The cartridge lifetime will be shortened if the quality of local water is poor) .

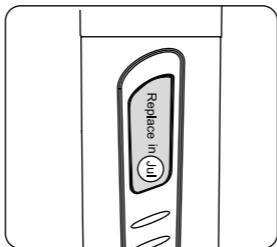


How to do with the clogged situation or low water pressure

Upside-down installation


1. Turn off the source and remove the cartridge from the shower head.

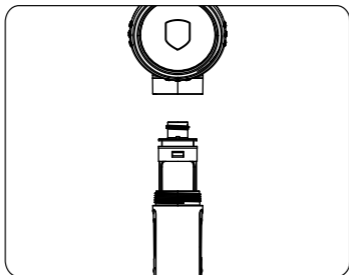

2. Insert the existing cartridge upside down in the negative direction.

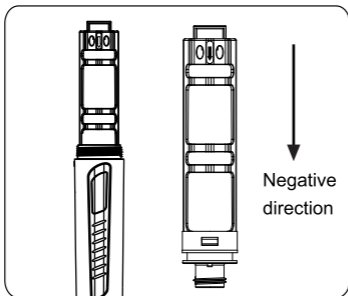

3. Turn on the water for 1-3 minutes until the filtered water is clear.

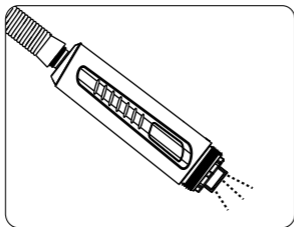

4. Attach the filter body to the shower head.

Declaration:

Your filtered shower head is designed and tested for use with genuine Miniwell parts. Use parts from other manufacturers may result in loss of contaminant reduction performance, system damage or failure. In addition, this system and installation shall comply with applicable country and local regulations.

After-sales service card

User name		Contact tel.	
Purchase date		Sales store	
Contact Email			
Product serial No.			
One-year Warranty It covers all defects in materials or workmanship in manufacturing of the filtered shower head except filter cartridges. (Except for intentional damage). Detailed terms: To receive the above service, please contact by email service@miniwell.net within the valid period to describe the problem to our customer service representatives, who will revert to you within 2 working days.			

(Remark: Final interpretation is owned by our company.)

Manufacturer: Guangzhou Lanquan Household Electrical Appliance Co., Ltd.

Address: No.16, Hongmian Road, Jinkeng industrial Zone, Xingnan Avenue, Nancun Town, Panyu District, Guangzhou

Website: www.miniwell.net

B002074