


miniwell


SHOWER FILTER L760-E SERIES

Installation and replacement Instructions

(With electronic replacement reminder)

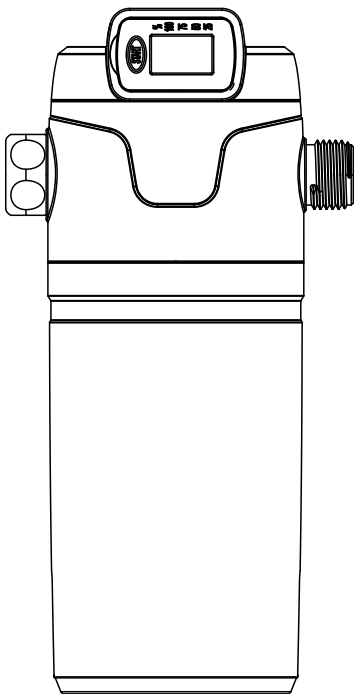

Product Illustration

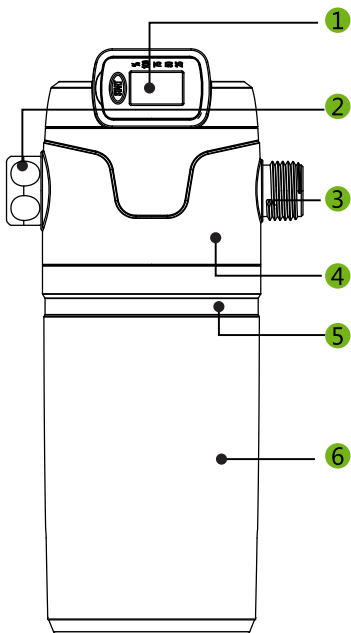

- 1 Electronic replacement reminder
- 2 Water inlet with chrome collar and rubber washer
- 3 Water outlet
- 4 Filter head
- 5 Visual belt (Monitor the filtering effect)
- 6 Filter body (Cartridges inside)

Attention

This system is not suggested to use for other purpose except for shower filtration.


- 2 Do not use with water that is microbiologically unsafe or of unknown water quality without adequate disinfection before or after the system.
- 3 Whether the local water quality meets the standard of drinking water should follow the guidelines of the local water bureau. However, this system is not for use as a drinking water treatment unit, if necessary please boil before drinking.

Specification


Product name	Shower filter
Product Model	L760-E SERIES
Product Size	Φ70x204mm
Filter weight	504g
Filtration media	PP cotton filter, carbon fiber, and nano deoxidization media
Shell Material	ABS (Food grade)
Outlet water flow	2.0 GPM
Filtered capacity of Chlorine	13,000 gallons (The blockage is easily caused if the water quality is poor.)
Operating pressure range	0.1-0.4MPa 15-80 PSI
Operating temperature range	5-60°C (41-140°F)
Outlet thread specification	G1/2

Product Installation


- 1 Turn off the source, remove your existing shower head from the water supply pipe.

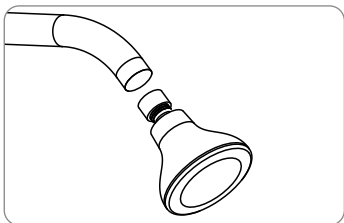


- 2 Attach the shower filter body to the water supply pipe at the side with the chrome collar, turn clockwise to tighten.

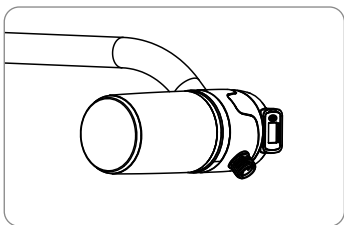



- 3 Attach the shower head to the shower filter body.


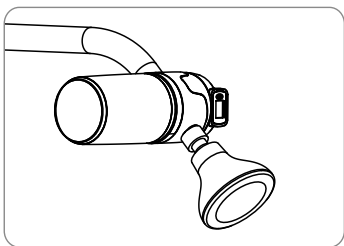


- 4 Adjust the angle of the screen to make it comfortable to watch

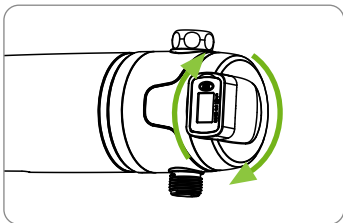

Other similar installations

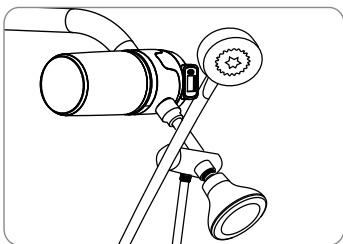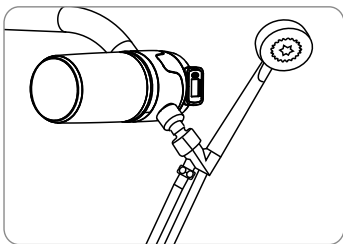

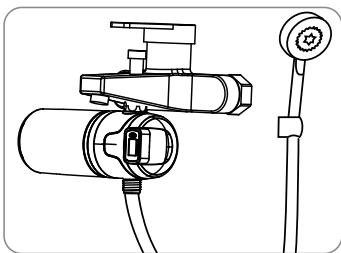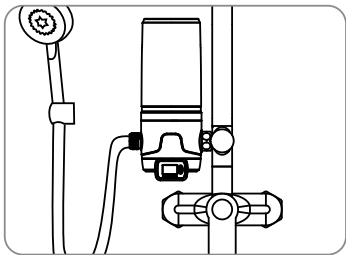


Notices

- a. When leakage occurring around the connector, unscrew the inlet collar from pipe, reinstall the washer and reconnect the shower pipe.
- b. Whether the filtered water goes through the top gush or not is determined by the structure of showering wares.
- c. Do not use a shower head or wand with a shut-off valve.

Electronic replacement reminder


Please press the "START" button for 5 seconds until the full-screen displays, which means the starting is successful. The figure of the full screen is "180".

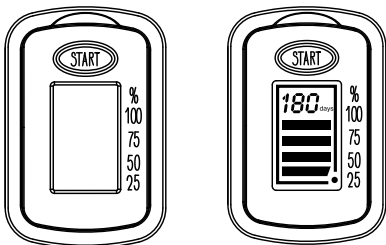

Before

After

When the screen indicates the existing cartridge is ending (Display "00" and flash), please replace the COMPOSITE FILTER and then press the "START" button for 5 seconds to restart the system.



Need to replace


Attention:

1. The reminder system is only used for the replacement of composite filter, not for PP cotton filter. Details please follow the instruction of "Cartridge replacement".

2. Normally, if the system is needed to reset after several-days using, please press the "START" button for 8 seconds.
3. The system battery lasts about 24 months.

Cartridge replacement

After unscrewing the filter body, please replace the composite filter as required, or replace the PP cotton filter individually.

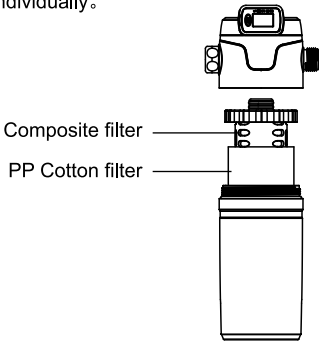

How to do when clogging or low water pressure occur?


Please replace the PP cotton filter firstly. If not workable, please replace the composite filter.

Replacement Filters Combination

1. Composite filter


(Carbon fiber and nano deoxidization media)

- * Please replace this filter when the screen indicates the existing cartridge is ending (when the display flashing).
- * Lifetime is about 180 days, but the blockage is easily caused if the water quality is poor. When the clogging situation occurs or the water pressure keeps smaller even after replacing the PP cotton filter, please replace the composite filter.

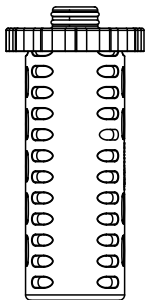

2. PP Cotton filter

Lifetime is about 180 days, but the blockage is easily caused if the water quality is poor. Please replace this filter when clogging occurs or the water pressure becomes smaller.



Declaration:

This shower filter is designed and tested for use with genuine Miniwell parts, including replacement filters and all hardware. Use parts from other manufacturers may result in loss of contaminant reduction performance, system damage or failure.

This system and installation shall comply with applicable country and local regulations.

After-sales service card

User name		Contact tel.	
Purchase date		Sales store	
Contact Email			
Product serial No.			
After-sales service: <ul style="list-style-type: none">- Lifetime guarantee: it covers all defects in materials or workmanship in manufacturing of the shower water filter systems except filter cartridges.- Money-back guarantee: If the filtered water is tested to turn yellow by the residual chlorine reagent, Miniwell promise to pay back your money within 120 days from the date of your purchasing.			
Detailed terms: <p>To receive the above services, please contact by email service@miniwell.net within the valid period to describe the problem to our customer service representatives, who will revert to you within 2 working days.</p>			
Guangzhou Lanquan Household Electric Appliance Co., Ltd.			

(Remark: Final interpretation is owned by our company.)

Manufacturer: Guangzhou Lanquan Household Electric Appliance Co., Ltd.

Address: No. 6, Jin keng guang xing hong mian Road, Nancun Town, Panyu District, Guangzhou, Guangdong, China (Mainland)

Website: www.miniwell.net