

# DVM500


Multi-purpose and ultralight decoiler!

## Product **PLUS**

Especially easy to move around and transport in vehicles, this light and versatile model of decoiler is particularly suited to work on building sites

The free roller can be positioned very easily, to adapt the distance depending on the diameter of the coil to be used. Directly set on rollers, the material can be uncoiled effortlessly, whatever the width or diameter of the coil.

Decoiler for 0.5-m to 1.25-m wide coils

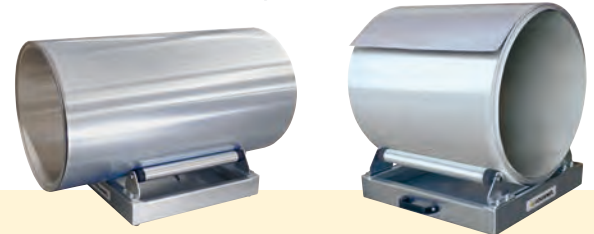

### Fields of application

- Roofing building sites
- Shaping workshops
- Uncoiling and handling

### Advantages

- Little space requirement and easily movable
- Roll with adjustable positioning acc. to the Ø of the coil
- Can be used with coil from 0.5 m to 1.25 m wide



## Features DVM500

- Simple and sturdy design
- Base made of anti-corrosive zinc-plated steel
- 1 roller with fixed positioning
- 1 roller with adjustable positioning
- Carrying handle
- Base on anti-skid pads
- Anti-marking protections on the rollers



### DVM500

Max load (kg)	500
End position of the movable roller (mm)	275
Min. distance between rollers (mm)	200
Max. distance between rollers (mm)	420
Base dimensions (L x l x h mm)	565 x 590 x 100
Overall dimensions (L x l x h mm)	610 x 590 x 210
Net weight (kg)	21

### Optional equipment

Set of 4 braked wheels diameter 80mm, reference DVMR500, usable on the light decoiler DVM500. It allows the displacement of the decoiler loaded with its coil on stable and hard ground and facilitates the alignment of the material facing the machine.

