


Seamers for standing seam allowing to lock the 1<sup>st</sup> and the 2<sup>nd</sup> seam

- Ref. **SER100A-05**: standard version
- Ref. **SER100A-05WAD**: version equipped with a set of cutting rollers Ref. **SER-05GALDEC** and automatic stop switch at the end of tray Ref. **SER-05SWITCH**



Model shown  
Ref. SER100A-05

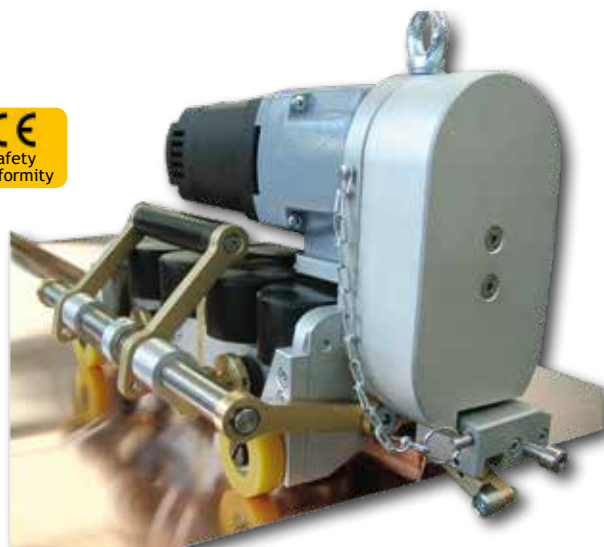


Model shown  
Ref. SER100A-05WAD

## Options

- Winter heating device Ref. **SER-05SETHIVER**
- Remote control with 12 m cable Ref. **SER-05TELECDE**
- Set of cutting rollers Ref. **SER-05GALDEC**

Model shown  
Ref. SER100A-05  
with the option  
SER-05TELECDE

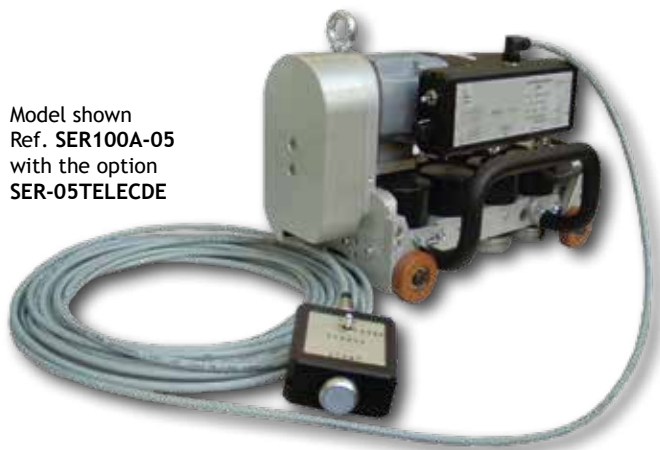

Model shown  
Ref. SER100A-05WAD  
with the option  
SER-05SETHIVER

Features	SER100A-05	SER100A-05WAD
Weight (kg)	22	22
Minimum radius for curved roofing (mm)	1200	1200
Variable speed (m/min)	from 5,5 to 13 m/min	from 5,5 to 13 m/min
Power supply	230 v single-phased	230 v single-phased
Capacity (mm)	steel, zinc, copper, alu: 0,8 stainless steel: 0,5	steel, zinc, copper, alu: 0,8 stainless steel: 0,5
Minimum assembly length (mm)	140	140
Minimum operating temperature	10° C (without winter set)	10° C (without winter set)
Set of cutting rollers	No	Yes
Automatic stop switch at the end of tray	No	Yes