


TR3 model

Product **PLUS**

The gravity roller conveyors for workshop ref.TR3 can support and evacuate large width standing seam trays at the roll-forming machine output.

The adjustable feet from 600 to 900 mm will enable to adapt the conveyor to the output height of the machine so that the shaped parts remain flat without risk of bending or distortion.

Its track width of 700 mm, its long length and the possibility of joining them together also make it very versatile for other conveyor applications.

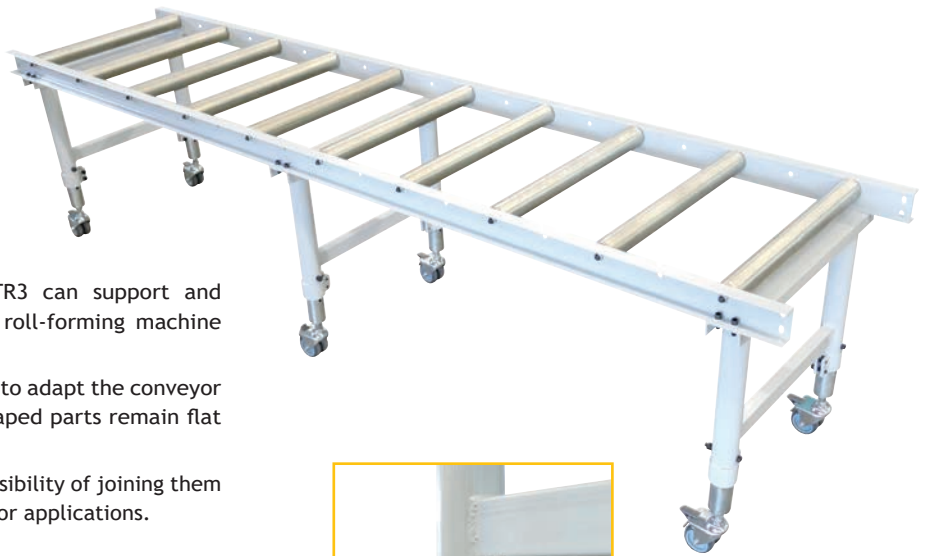

Model Ref. TR3
with optional swivel casters
Ref. TR3-ROUL

6 pads as standard

Application areas

- Roofing and metal building envelope
- Part conveying applications

Advantages

- Improves production flow
- Respects the flatness of the trays
- Very versatile use in the workshop
- Height-adjustable
- Fixed or mobile (optional swivel casters)



Features TR3

	TR3
Adjustable height (mm)	from 600 to 900
Length (mm)	2900
Width (mm)	700
Roller diameter (mm)	60
Number of rollers	10
Roller pitch (mm)	300
Maximum load (kg)	800
Weight (kg)	95



Optional equipment

- 6 swivel casters 125mm diameter, with brakes - Ref. TR3-ROUL

