

# ViewSonic® LCD DISPLAY **VG2455**



## Key Features

- USB Type-C
- Frameless bezel
- SuperClear® IPS technology
- HDMI, DisplayPort and VGA inputs
- vDisplay Manager (free download)



## Product Description

The ViewSonic VG2455 is a 24" (23.8" viewable) 1080P IPS monitor designed to fit the modern office space. The monitor comes with a built-in USB Type-C port. Charge and display content simply via a single cable from your device, enabling connection to your laptop through a single USB cable and keeping your workstation neat while also functioning as a docking monitor. In addition, the monitor is equipped with DisplayPort, HDMI, VGA, and three USB Type-A ports to expand your efficiency. The three-sided frameless bezel design lets you enjoy an uninterrupted view of content across multiple monitors. An advanced ergonomic design offers the widest range of adjustments available for maximum comfort; including pivot, swivel, height adjustment, and an impressive 40° tilt, allowing you to use the monitor while standing or have strategic group discussions around the screen. The packaging is environmentally friendly and offers quick and easy setup, making the VG2455 monitor perfect for business environments.

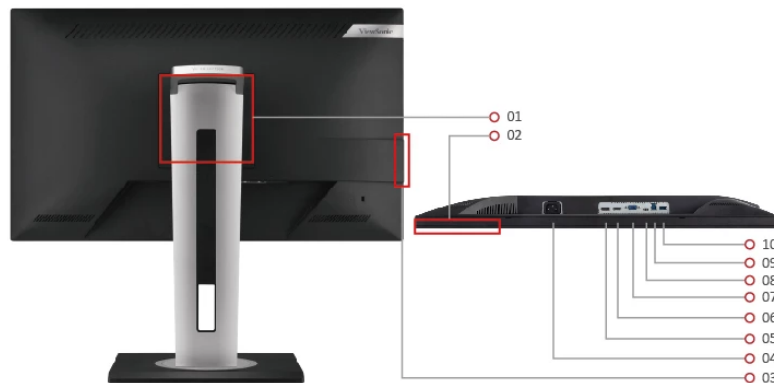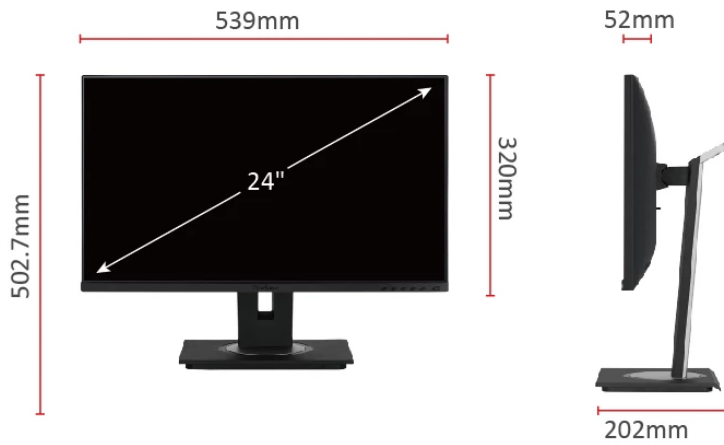

- 1. VESA Compatible  
(Wall Mount 100 x 100 mm)
- 2. Menu Control Panel
- 3. USB 3.1 down stream x 2

- 4. AC In
- 5. DisplayPort
- 6. HDMI
- 7. VGA

- 8. USB Type C
- 9. USB 3.1 up stream
- 10. USB 3.1 down stream

- 1. VESA Compatible (Wall Mount 100 x 100 mm)
- 2. Menu Control Panel
- 3. USB 3.1 down stream x 2
- 4. AC In
- 5. DisplayPort
- 6. HDMI
- 7. VGA
- 8. USB Type C
- 9. USB 3.1 up stream
- 10. USB 3.1 down stream

**Visit Us** ■ [www.viewsonic.com](http://www.viewsonic.com)

**DISPLAY**

|                         |                                 |
|-------------------------|---------------------------------|
| Monitor Size:           | 24" (23.8" viewable)            |
| Panel Technology:       | IPS Technology                  |
| Resolution:             | 1920 x 1080                     |
| Display Area:           | 527 mm x 296.5 mm               |
| Aspect Ratio:           | 16:9                            |
| Brightness:             | 250 cd/m <sup>2</sup> (Typ)     |
| Contrast Ratio:         | 1000:1 (Typ)                    |
| Dynamic Contrast Ratio: | 50,000,000:1                    |
| Viewing Angles:         | 178 degrees / 178 degrees (Typ) |
| Response Time:          | GtG(Recommend; typ; ms): 5ms    |
| Refresh Rate (Hz):      | 60                              |

**INPUT SIGNAL**

|            |  |
|------------|--|
| Frequency: | 24 ~ 82KHz ; Fv = 50 ~ 75Hz,                     |
| Sync:      | Separate/Composite/SOG, TMDs,PCI-E, Micro-Packet |

**COMPATIBILITY**

|       |                              |
|-------|------------------------------|
| PC:   | Windows 7/8/8.1/10 certified |
| Mac®: | macOS tested                 |

**CONNECTOR**

|        |   |
|--------|---|
| Input: | VGA In x1, HDMI In(1.4) x1, DisplayPort In(1.2) x1, USB Type C (Up Stream; DisplayPort Alt mode)(3.1) x1, USB Type B (Up Stream)(3.1) x1, USB Type A (Down Stream; 900mA)(3.1) x3 |
|--------|---|

**AUDIO**

|          |        |
|----------|--------|
| Speaker: | 2W x 2 |
|----------|--------|

**USB**

|             |  |
|-------------|--|
| Upstream:   | USB Type C (Up Stream; DisplayPort Alt mode) (v 3.1) x 1<br>USB Type B (Up Stream) (v 3.1) x 1 |
| Downstream: | USB Type A (Down Stream; 900mA) (v 3.1) x 3  |

**POWER**

|              |                                  |
|--------------|----------------------------------|
| Power:       | 3-pin Socket (IEC C14 / CEE22)   |
| Voltage:     | AC 100-240V (Universal); 50/60Hz |
| Consumption: | 17.8W                            |
| Optimise:    | 14.4W                            |
| Conserve:    | 11.9W                            |

**ERGONOMICS**

|                    |                  |
|--------------------|------------------|
| Tilt:              | 40 ~ -5 degrees  |
| Swivel:            | 60 ~ -60 degrees |
| Pivot:             | 90 ~ -90 degrees |
| Height Adjustment: | 130mm            |

**WALL MOUNT**

|        |               |
|--------|---------------|
| VESA®: | 100mm x 100mm |
|--------|---------------|

**OPERATING CONDITIONS**

|                          |                              |
|--------------------------|------------------------------|
| Temperature (° F / ° C): | 32°F to 104°F (0°C to 40°C)  |
| Humidity:                | 20% to 90% (no condensation) |

**DIMENSIONS (W X H X D) (MM)**

|                              |                                       |
|------------------------------|---------------------------------------|
| Physical with stand (mm):    | 539mm (W) x 406~512mm (H) x 202mm (D) |
| Physical without stand (mm): | 539mm (W) x 320mm (H) x 52mm (D)      |
| Packaging (mm):              | 595mm (W) x 210mm (H) x 396mm (D)     |

**WEIGHT**

|                    |       |
|--------------------|-------|
| Net with stand:    | 6.4kg |
| Net without stand: | 4kg   |
| Gross:             | 9.4kg |

**REGULATIONS**

cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Silver, CEC, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA, BSMI, PSB, RCM, GEMS, CCC, China RoHS, China Energy Label

**WARRANTY**

Warranty offered may differ from market to market

**PACKAGE CONTENTS**

VG2455 x1  
3-pin Plug (1.8M, IEC C13/CEE22) x1  
USB A/B Cable (1.8M, v3.1; Male-Male) x1  
Quick Start Guide x1  
USB Type-C Cable(1.1M, Male-Male)