https://www.viewsonic.com/global/products/sheet/LDS135-151

ViewSonic LDS135-151


Key Features

- Pre-assembled kit ready for instant use
- Foldable screen with the movable flight case for easy delivery
- Built-in stand with motorized height adjustment
- Impressive audio from Harman Kardon speakers
- Seamless large display for rental at any event/exhibition



Product **Description**

The ViewSonic® LDS135-151 is a 135" All-in-One Direct View LED Display Solution Kit that boasts instant use, easy delivery, and convenient maintenance, making it an ideal rental-ready solution for events, exhibitions, or any other short-term usage. The pre-assembled design and built-in motorized height adjustment stand enables effortless set up within just a few minutes. Delivery convenience is greatly enhanced with the new foldable screen design, reducing the packaging size of the movable flight case by nearly 50% compared to the previous generation, thus minimizing shipping costs. With the seamless large screen and superior built-in Harman Kardon speakers, be ready to impress your audience everywhere from high-end board rooms and receptions to galleries, auditoriums, and other large venues.

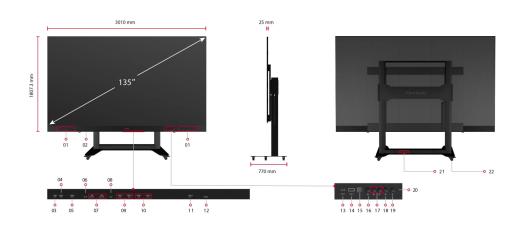

https://www.viewsonic.com/global/products/sheet/LDS135-151

1. Harman Kardon Speakers	
2. Power Button	
3. HDMI Out	1
4. Audio Out	1
5. S/PDIF Out	1
6. IR In	1
7. USB 2.0 (5V/1.5A) x 2	1

8. LAN & Control 9. HDMI 2.0 x 2 10. HDMI 1.4 x 2 11. HDMI 2.1 13. USB-C (5V/2A) 14. USB-C (5V/2A) 12. RS232 14. USB 2.0 (5V/1.5A)

15. IR Receiver 16. Menu Control: Brightness Level 17. Menu Control: Volume

22. 360° Silent Wheels

18. Menu Control: Input Source

19. Power Button

20. Indicator Light 21. Control Panel: Height Adjustment

Visit Us

www.viewsonic.com

https://www.viewsonic.com/global/products/sheet/LDS135-151

SPECIFICATION		OTHERS	
Screen Size:	135"	Power Supply Voltage:	100-120V/30A~ 50/60Hz or 220-240V/15A~ 50Hz
Display Area (mm):	3000 (H) x 1687.5V)	Tower Suppry Voltage.	(vary by country)
Native Resolution:	1920x1080		1500W (typ), 2500W (max)
Panel Technology:	Direct view LED	Power Consumption:	< 0.5W (Sleep), < 0W
LED Package Type:	SMD 3 in 1		(Off)
Pixel Pitch (mm):	1.56	Operating Temperature:	0~40°C
Refresh Rate:	4440Hz	LED Module Quantity:	100
Brightness (max.):	600 nits (8 levels adjustable)	Ingress Protection Rating:	IP30 564 lbs
Contrast Ratio (typ.):	6000:1		(253 kg)
Orientation:	Landscape	Gross Weight:	965 lbs (438 kg)
Viewing Angles (typ.):	H = 160, V = 160	Screen Dimensions (WxHxD): m 30 m 7	1800x1948x770 mm(min.) 3010x2598x770 mm(max.)
LED Lifetime (typ.):	100,000 Hours Total 64GB		
Local Storage:	(56GB available storage)		74.8x80x31.5 inches
Embedded OS:	Android 9.0	Packing Dimensions (WxHxD):	(1900x2032x800 mm)
Resolution Support:	VGA(640 x 480) to 1080p(1920 x 1080)	STANDARD ACCESSORIES	
		Power Cord:	x1
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p,	LAN Cable (Cat 5A):	x1 (5m)
	2160P/60Hz	Remote Control:	x1
Horizontal Frequency:	23-120 kHz	QSG:	x1
Vertical Scan Rate:	15-135 Hz	Spare Parts:	LED PCB Unit x7
INPUT		Maintenance Tool:	LD-MK-001 x1
HDMI:	x6 (HDMI 2.1 x 1, HDMI 2.0	OPTIONAL ACCESSORIES	
TIDMI.	x 2, HDMI 1.4 x 2, HDMI 2.0 internal x1)	Maintenance Tool:	LD-MK-001
USB Type A:	x3	ViewBoard Cast Button(USB-C):	VB-WPS-001
RJ45 Input (Internet):		ViewBoard Cast Button(USB-	
· · · · · ·	(USB2.0 x3) x1	ViewBoard Cast Button(USB- A+HDMI):	VB-WPS-003
IR in:	(USB2.0 x3) x1		VB-WPS-003
IR in: Wi-Fi Input:	(USB2.0 x3) x1 x1		VB-WPS-003
IR in: Wi-Fi Input: USB Type C:	(USB2.0 x3) x1		VB-WPS-003
Wi-Fi Input: USB Type C:	(USB2.0 x3) x1 x1 2.4G/5G Hz x1 (Video input, Power		VB-WPS-003
Wi-Fi Input:	(USB2.0 x3) x1 x1 2.4G/5G Hz x1 (Video input, Power		VB-WPS-003
Wi-Fi Input: USB Type C: OUTPUT	(USB2.0 x3) x1 x1 2.4G/5G Hz x1 (Video input, Power output (5V/2A)) x2 (HDMI 2.0 external		VB-WPS-003
Wi-Fi Input: USB Type C: DUTPUT HDMI out:	(USB2.0 x3) x1 x1 2.4G/5G Hz x1 (Video input, Power output (5V/2A)) x2 (HDMI 2.0 external x1,internal x1)		VB-WPS-003
Wi-Fi Input: USB Type C: DUTPUT HDMI out: Speaker:	(USB2.0 x3) x1 x1 2.4G/5G Hz x1 (Video input, Power output (5V/2A)) x2 (HDMI 2.0 external x1,internal x1) 20W x2 (Harman Kardon)		VB-WPS-003
Wi-Fi Input: USB Type C: DUTPUT HDMI out: Speaker: Audio out (3.5mm): USB Type A (Power):	(USB2.0 x3) x1 x1 2.4G/5G Hz x1 (Video input, Power output (5V/2A)) x2 (HDMI 2.0 external x1,internal x1) 20W x2 (Harman Kardon) x1 Shared with USB input		VB-WPS-003
Wi-Fi Input: USB Type C: DUTPUT HDMI out: Speaker: Audio out (3.5mm): USB Type A (Power):	(USB2.0 x3) x1 x1 2.4G/5G Hz x1 (Video input, Power output (5V/2A)) x2 (HDMI 2.0 external x1,internal x1) 20W x2 (Harman Kardon) x1 Shared with USB input		VB-WPS-003
Wi-Fi Input: USB Type C: DUTPUT HDMI out: Speaker: Audio out (3.5mm): USB Type A (Power): CONTROL	(USB2.0 x3) x1 x1 2.4G/5G Hz x1 (Video input, Power output (5V/2A)) x2 (HDMI 2.0 external x1,internal x1) 20W x2 (Harman Kardon) x1 Shared with USB input (5V/1.5A x3)		VB-WPS-003
Wi-Fi Input: USB Type C: OUTPUT HDMI out: Speaker: Audio out (3.5mm): USB Type A (Power): CONTROL RJ45 (LAN control):	(USB2.0 x3) x1 x1 2.4G/5G Hz x1 (Video input, Power output (5V/2A)) x2 (HDMI 2.0 external x1, internal x1) 20W x2 (Harman Kardon) x1 Shared with USB input (5V/1.5A x3) x1 x1(shared with USB A		VB-WPS-003

Copyright © ViewSonic Corporation 2000-2023. All rights reserved.