



LCD DISPLAY TD1630-3



Key Features

- Advanced ergonomic stand for tilt or flat
- HDMI and VGA inputs
- Supports Windows® 7/8/10 and selected Linux
- 7H hardness screen
- Dual integrated speakers



Product Description

With advanced ergonomics, the display can tilt or lay flat to give users maximum comfort. TD1630-3 delivers touchscreen versatility, offering fantastic flexibility for retail or business settings. ViewSonic TD1630-3 is a 16" (15.6" viewable) display with 10-point multi-touch functionality, while VGA and HDMI inputs provide flexible connectivity. Adding to a list of versatility, the display is compatible with a wide range of operating systems, including Windows 10 and Linux versions.* Along with the dual integrated speakers, this intuitive touchscreen delivers a highly accurate, ultra-responsive touch experience that is ideal for interactivity in retail or business settings. *Supports Windows 7/8/10, Linux Kernel 4.X/3.X

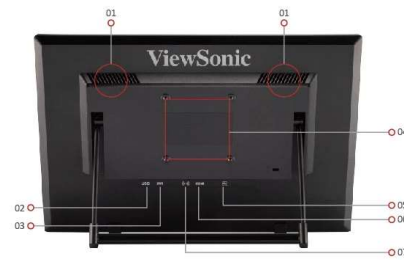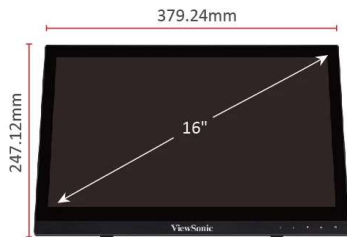

1. Internal Speakers
2. USB
3. DC In
4. VESA Compatible(Wall Mount 75x75mm)
5. VGA
6. HDMI

7. Earphone

Visit Us www.viewsonic.com

DISPLAY

Display Size (in.):	16
Viewable Area (in.):	15.6
Panel Type:	TN Technology
Resolution:	1366 x 768
Resolution Type:	WXGA
Static Contrast Ratio:	500:1 (typ)
Dynamic Contrast Ratio:	10M:1
Light Source:	LED
Colours:	262K
Colour Space Support:	6 bit true
Brightness:	160 cd/m ²
Aspect Ratio:	16:9
Response Time (Typical GTG):	12ms
Viewing Angles:	90° horizontal, 60° vertical
Backlight Life (Hours):	15000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	60
Blue Light Filter:	Yes
Colour Gamut:	NTSC: 45% size (Typ)
Pixel Size:	0.252 mm (H) x 0.252 mm (V)
Touch Screen:	Projected capacitive, 10-point multi touch
Surface Treatment:	Glossy, Hard Coating (7H)
Cover Glass Thickness:	0.83 mm

INPUT SIGNAL

Frequency:	Fh = 30 ~ 61KHz ; Fv = 56 ~ 75Hz
Sync:	Separate Sync, TMDS

COMPATIBILITY

PC:	Windows 7/8/10 tested
Mac®:	Display: Power Mac tested, Touch Module:iOS not support

CONNECTOR

Input:	DB -15 x 1 HDMI x 1 (v1.4 compatible) Audio in x1 (3.5mm plug)
--------	--

AUDIO

Speaker:	1W x 2
----------	--------

USB

Upstream:	Type B x 1
-----------	------------

POWER

Power:	5.5 x 2.1 x 11 mm DC connector
Voltage:	AC 100-240V (Universal); 50/60Hz
Consumption:	5.5W
Optimize:	4.9W
Conserve:	4.3W

ERGONOMICS

Tilt:	15 ~ 50 degrees
-------	-----------------

SPECIAL FEATURES

Eye Care:	Blue light filter
-----------	-------------------

WALL MOUNT

VESA®:	75mm x 75mm
--------	-------------

OPERATING CONDITIONS

Temperature (° F / ° C):	32°F to 104°F (0°C to 40°C)
Humidity:	20% to 85% (no condensation)

DIMENSIONS (W X H X D) (MM)

Physical with stand (mm):	379.24mm (W) x 247.12mm (H) x 37.15mm (D) (@0 degree)
Physical without stand (mm):	379.24mm (W) x 247.12mm (H) x 37.15mm (D)
Packaging (mm):	453mm (W) x 389mm (H) x 86mm (D)

WEIGHT

Net with stand:	1.32kg (2.91lbs)
Net without stand:	1.32kg (2.91lbs)
Gross:	2.5kg (5.51lbs)

REGULATIONS

VSI:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA, RCM, GEMS, BIS
------	---

WARRANTY

*Warranty offered may differ from market to market
--

PACKAGE CONTENTS

LCD Display 40W AC/DC Adapter (1.2m) Power Cable (1.5m) VGA Cable (1.5m) USB2.0 Cable (1.8m) Audio Cable (1.8m) Quick Start Guide
