


Key **Features**

- Easily extend your content from laptops and mobile devices
- One-cable solution for audiovisual and power signal transmission
- Flexible display setup work at any angle
- Compact size, light weight, and highly portable
- Sturdy and durable design



Product **Description**

The ViewSonic VG1655 is a portable 16" Full HD monitor perfect for overcoming one-screen limitations outside the office. Extend the screen from phones, tablets, or laptops for mobile work, one-on-one presentations, or leisure entertainment. The two universal USB Type C connectors provide a one-cable solution for audiovisual and power signal transmission. The adjustable wide stand and pivot-able display will support your working angles. With the anti-slip cover, metal case, and aluminum stand, reliability is embodied in the design.

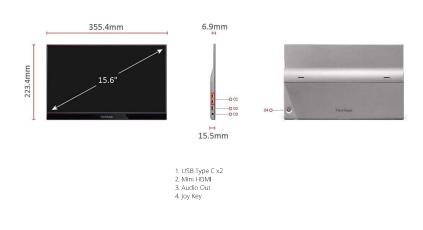

Visit Us www.viewsonic.com

DISPLAY		WEIGHT (IMPERIAL)	
Display Size (in.):	16	Net (lbs):	1.8
Viewable Area (in.):	15.6	Net Without Stand (lbs):	1.8
Panel Type:	IPS Technology	Gross (lbs):	4.8
Resolution:	1920 x 1080	WEIGHT (METRIC)	
Resolution Type:	FHD	Net (kg):	0.8
Static Contrast Ratio:	800:1 (typ)	Net Without Stand (kg):	0.8
Dynamic Contrast Ratio:	50M:1	Gross (kg):	2.2
Light Source:	LED	DIMENSIONS (IMPERIAL) (WX	(HXD)
Brightness:	250 cd/m² (typ)	Packaging (in.):	17.3 x 11.3 x 3.5
Colors:	16.2M	Physical (in.):	14 x 8.8 x 0.6
Color Space Support:	8 bit (6 bit + FRC)	Physical Without Stand (in.):	14 x 8.8 x 0.6
Aspect Ratio:	16:9	DIMENSIONS (METRIC) (WXH	XD)
Response Time (Typical GTG):	6.5ms	Packaging (mm):	440 x 288 x 89
Response Time (GTG w/OD):	6.551ms	Physical (mm):	355 x 223 x 16
Response Time (Typical Tr+Tf):	30ms	Physical Without Stand (mm):	355 x 223 x 16
Response Time (Typical TT+TT).		GENERAL	
Viewing Angles:	178° horizontal, 178° vertical, CR>5; 170° horizontal, 170° vertical, CR>10	cTUVus, FCC-B, ICES003, Energy	
Backlight Life (Hours):	15000 Hrs (Min)	Regulations:	Star 8.0, EPEAT Bronze, CEC, NRCan, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA, BSMI, RCM, GEMS, VCCI, PSE, BIS
Curvature:	Flat		
Refresh Rate (Hz):	60		
Blue Light Filter:	Yes		VG1655 x1, mini HDMI to HDMI
Color Gamut:	NTSC: 45% size (Typ), sRGB: 64% size (Typ)	PACKAGE CONTENTS:	Cable (v1.4; Male-Male) x1, USB Type-C Cable (Male-Male) x1, USB Type-C to Type-A 3.2 Gen1 Cable (Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Protect cover
Pixel Size:	0.179 mm (H) x 0.179 mm (V)		
Surface Treatment:	Anti-Glare, Hard Coating (3H)		x1, Clean cloth x1
COMPATIBILITY		Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
PC Resolution (max):	1920x1080		
Mac® Resolution (max):	1920x1080	Warranty:	*Warranty offered may differ from market to market
PC Operating System:	Windows 10 certified; macOS tested	Power Management:	Energy Star standards, EPEAT
Mac® Resolution (min):	1920×1080		
CONNECTOR			
USB 3.1 Type C:	2		
3.5mm Audio Out:	1		
Mini HDMI:	1		
Power in:	External power adapter		
AUDIO			
Internal Speakers:	0.8Watts x2		
POWER			
Eco Mode (Conserve):	5.1W		
Eco Mode (optimized):	6W		
Consumption (typical):	7W		
Consumption (max):	7.3W		
Voltage:	AC 100-240V, 50/60 Hz		
Stand-by:	0.5W		
Power Supply:	External		
CONTROLS	omu		
Physical Controls:	Up, Right, Down, Left, Power		
On Screen Display:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual		
OPERATING CONDITIONS	Image Adjust, Setup Menu		
Temperature:	32°F to 104°F (0°C to 40°C)		
	20% to 90%		
Humidity (non-condensing):	∠∪ /0 tU 3U /0		
INPUT SIGNAL	15 ~ 82KHz		
Frequency Vortical:	15 ~ 82KHz		
Frequency Vertical:	50 ~ 75Hz		
VIDEO INPUT	TMDS mini HDML (v.4.4). Minro		
Digital Sync:	TMDS - mini HDMI (v1.4), Micro- Packet - Type C		
	racket - Type C		
ERGONOMICS	racket - Type C		

Copyright © ViewSonic Corporation 2000-2021. All rights reserved.