

ViewSonic® LCD DISPLAY VA1655

Key Features


- Compact, lightweight and portable
- Easily extend display to a larger screen from mobile devices
- 60W USB-C one cable solution for multimedia transfer and power charging*
- Lightweight plastic case design with a foldable stand
- Flexible display setup – work at any angle



*External power adaptor required for power charging

Product Description

The ViewSonic VA1655 is a lightweight, portable 16" Full HD monitor with USB-C connectivity for multimedia transfer and power charging. Designed to boost productivity on the go, extend your screen from a phone, tablet, or laptop to a larger display anytime, anywhere. With a foldable stand and a pivotable display, freely adjust the screen's viewing angles and display layouts — whether in landscape or portrait orientation — to match your preferred work setup.

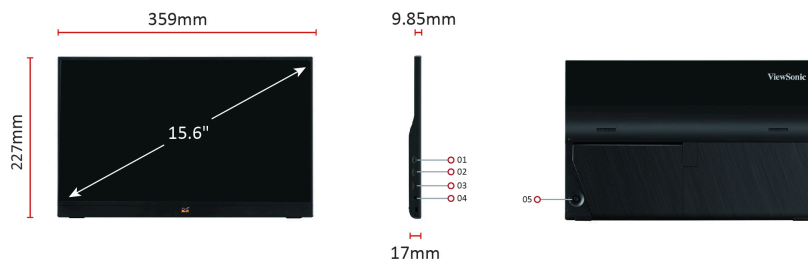

1. USB Type C(Power)x1
2. USB Type C x1
3. Mini HDMI
4. Audio Out
5. Joy Key

Visit Us

www.viewsonic.com

DISPLAY

Display Size (in.):	16
Viewable Area (in.):	15.6
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	800:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m ² (typ)
Colors:	16.2M
Color Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	16:9
Response Time (Typical GTG):	7ms
Viewing Angles:	170° horizontal, 170° vertical
Backlight Life (Hours):	15000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	60
Blue Light Filter:	Yes
Color Gamut:	NTSC: 45% size (Typ) sRGB: 64% size (Typ)
Pixel Size:	0.179 mm (H) x 0.179 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

USB 3.2 Type C DisplayPort Alt mode only :	1 (60W power charger)
3.5mm Audio Out:	1
Mini HDMI:	1
Power in:	USB Type C (power only)

AUDIO

Internal Speakers:	0.8Watts x2
--------------------	-------------

POWER

Eco Mode (Conserve):	5.1W
Eco Mode (optimized):	6W
Consumption (typical):	7W
Consumption (max):	7.3W
Voltage:	DC 5V/9V/12V/15V/20V
Stand-by:	0.3W
Power Supply:	External (Optional)

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

CONTROLS

Physical Controls:	Up, Right, Down, Left,
--------------------	------------------------

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

INPUT SIGNAL

Frequency Horizontal:	mini HDMI (v1.4): 15 ~ 82KHz, Type C: 24 ~ 82KHz
Frequency Vertical:	mini HDMI (v1.4): 50 ~ 75Hz, Type C: 50 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - mini HDMI (v1.4), Micro-Packet - Type C
---------------	--

ERGONOMICS

Tilt (Forward/Back):	30° / 53°
----------------------	-----------

WEIGHT (IMPERIAL)

Net (lbs):	1.5
Net Without Stand (lbs):	1.5
Gross (lbs):	3.7

WEIGHT (METRIC)

Net (kg):	0.7
Net Without Stand (kg):	0.7
Gross (kg):	1.7

DIMENSIONS (IMPERIAL) (WXHXD)

Packaging (in.):	17.1 x 15.4 x 3.5
Physical (in.):	14.1 x 8.9 x 0.7
Physical Without Stand (in.):	14.1 x 8.9 x 0.7

DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	434 x 391 x 88
Physical (mm):	359 x 227 x 17
Physical Without Stand (mm):	359 x 227 x 17

GENERAL

Regulations:	cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, NRCan, NOM, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, RCM, GEMS, VCCI, PSE, BIS
--------------	--

PACKAGE CONTENTS:	VA1655 x1, mini HDMI to HDMI Cable (v1.4; Male-Male) x1, USB Type-C Cable (Male-Male) x1, Quick Start Guide x1, Sleeve case x1
-------------------	--

Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
-------------------	--

Warranty:	*Warranty offered may differ from market to market
-----------	--

Power Management:	Energy Star standards, EPEAT
-------------------	------------------------------

Power

On Screen Display:

Input Select, Audio
Adjust, ViewMode,
Color Adjust, Manual
Image Adjust, Setup
Menu

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.