

TheChuckBucket.com



For the most up to date instructions and to view an assembly video please visit our website.

Assembly and use Instructions

Everything you need is included in the hardware kit.

Assemble the Bucket:

Bolt the Horizontal bar and mounting bracket to the bucket using the six bolts as shown. Add the foam tape on the back centered in locations shown. Place the included mat in the bottom of the bucket.

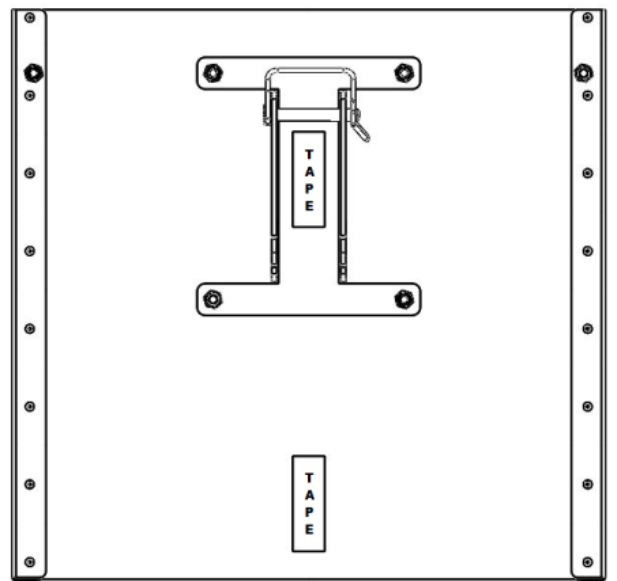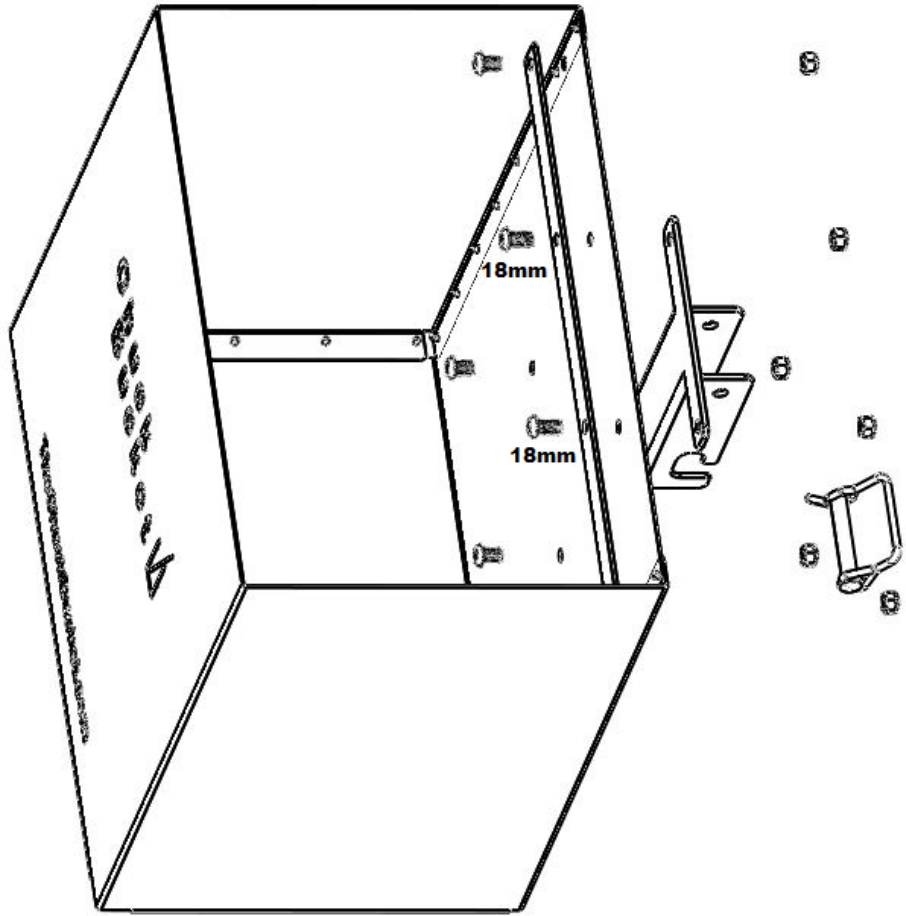


General Guidelines For Use

Insert the hitch stud into your hitch receiver and secure it with the trailer hitch pin. Anti-wobble feature is not intended to secure the unit to the vehicle. **The trailer hitch pin must be used.**

Tighten the anti wobble bolt with the included key and secure the key in a safe location.

Note for the 1-¼ retrofit kit the CURT anti wobble square nut goes into the hitch studs 1-¼" tube. Align the square nut with the stud key hole, insert the stud carefully into the vehicle's hitch receiver and then insert the threaded locking bolt through the same side as the square nut is located. Tighten the locking bolt and secure it with the included key pin.

Attach Bucket assembly and upper ring as shown below and secure with locking pins. Locking pins must always be used. **The Bucket and upper ring are not secure if the locking pins are not used. Accidents may occur.** If desired the locking pins may be replaced with fixed bolts or deep shackle locks for security reasons.

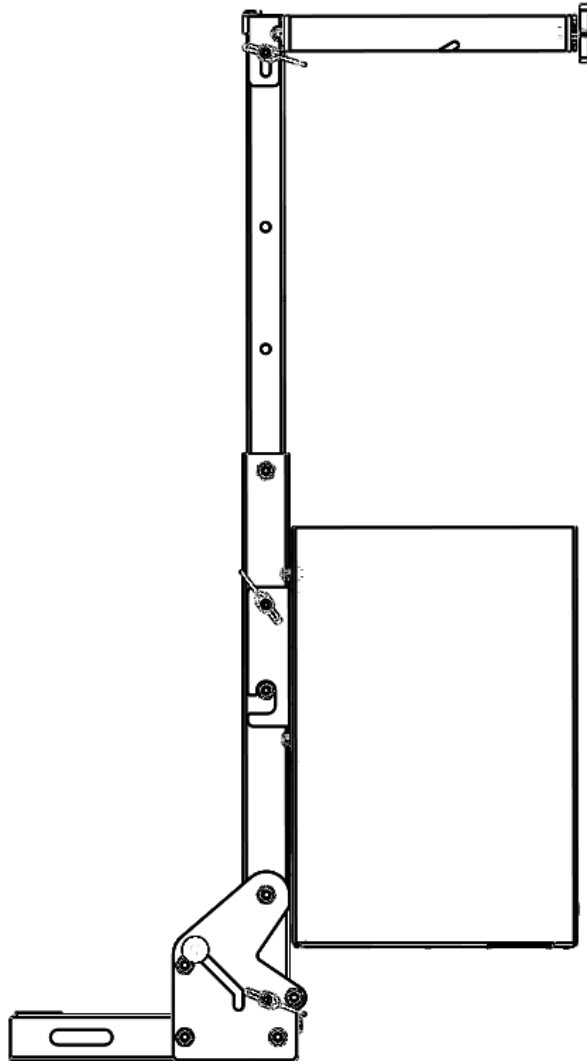

Insert and secure the locking pin into the lower tilt mechanism. **Note the lower tilt mechanism is not secure without the lower locking pin in place. Accidents may occur.** Spontaneous rearward tilting can and has occurred over large bumps. Chuck Rack LLC is not liable for accidents due to inadvertent tilting when the locking pin is not present. Be Advised.

Place gear in the chuck bucket and secure as desired. We suggest securing your gear vertically to the main column. A 4 foot long webbing strap is provided to aid in securing your gear. Another preferred option is a rubber utility strap.

Optionally you can lock your gear. We recommend the Masterlock® Python.
Secure your gear! Unsecured gear is dangerous and could cause accidents.

To tilt the unit back remove the lower tilt locking pin. Tilt the unit as far vertical as possible to remove pressure on the lower tilt release slider and then slide the pin upward in the groove. Keep all fingers out of pinch points in the tilting mechanism and slowly tilt back the unit. To lock the unit vertically again simply push the unit upright and the slide pin should slide down to temporarily secure the unit vertically. If the slide pin does not slide down due to debris, etc then you can manually slide it down into place. Re-insert and secure the lower locking pin.

Do not drive with the unit tilted back.

As there are many various options for what to carry with your Chuck Bucket, **Chuck Rack LLC is not Liab**le for unsecured cargo. Chuck Bucket is Rated for 100Lbs in **smooth road conditions**. Carefully inspect your Chuck Bucket integrity prior to use and discontinue use if mechanical damage is present. While the Chuck Bucket was designed to last, accidents happen. Replacement parts are available by contacting Chuck Rack LLC at info@chuckrack.com

Finally, make your chuck bucket your own! Slap your favorite stickers on it. Paint it. Wrap it up in cool tape. Did you haul something cool? Tag us on instagram [@thechuckbucket](https://www.instagram.com/thechuckbucket)

Suggestions, comments, cool ideas for accessories that mount to the BASE post? Please reach out at info@chuckrack.com

Return Policy and Limited Warranty:

Return Policy:

- Product can be returned within 30 days
- Customer is responsible for return shipping & original outbound shipping
- Up to a 10% restocking fee may be assessed based on condition of returned product
- To be eligible for return, units may show signs of minor use, but should be in near perfect condition
- Please inspect product on arrival, If product have been damaged in shipping please contact us at Info@chuckrack.com

Limited Warranty

For a Period of 3 years Chuck Rack LLC will repair or replace free of charge any part(s) found upon examination by Chuck Rack at its shop in Salt Lake City, UT to be defective in material or workmanship, subject to the following limitations:

This warranty applies only to the original consumer purchaser. As confirmed by our internal records and customer provided proof of identity.

The purchaser shall pay all transportation costs on any warranty work.

All warranty work shall be performed ONLY by Chuck Rack LLC. Chuck Rack LLC assumes no responsibility, and this warranty shall be void, where repairs have been made or attempted by others.

This warranty does not cover product failure due to misuse, damage in transit, negligence, accidents, abuse, alterations, i.e. off label use, repair, or investigate dismantling by unauthorized persons.

This warranty is the only warranty provided by Chuck Rack LLC and Chuck Rack LLC DISCLAIMS ALL OTHER WARRANTIES, WHETHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ALL WARRANTIES FOR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Chuck Rack LLC shall not be liable for consequential, indirect, special or punitive damages, including without limitation, physical injury, and shall in no event be liable in excess of the purchase price of the product. This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

Be sure to inspect your product prior to use for damage and to discontinue use if damage is suspect.

Our products are carefully inspected before shipment. Chuck Rack LLC is dedicated to providing a quality product that we believe in and should be excellent for our customers.

For warranty claims: Contact Chuck Rack at info@chuckrack.com