

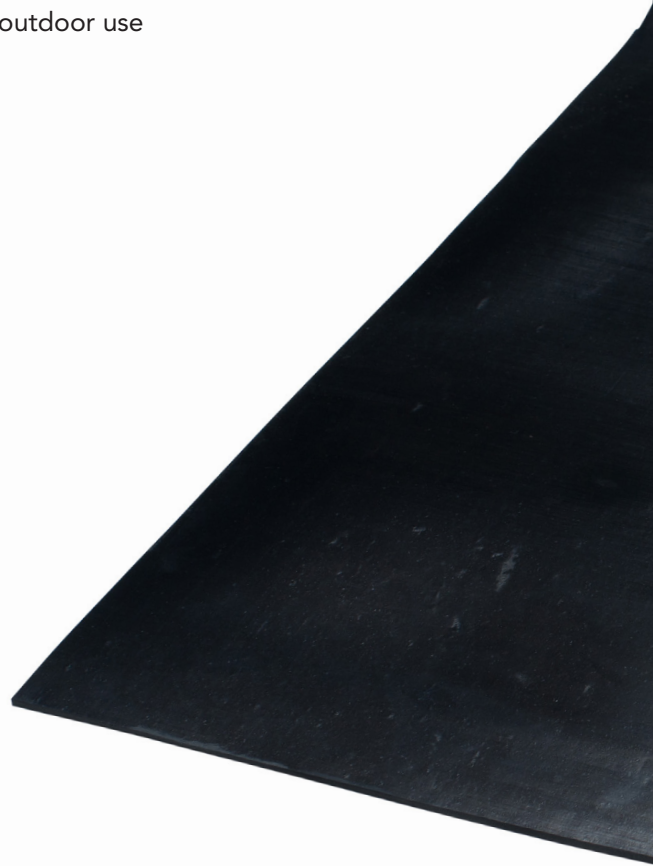


Proflex Commercial EPDM has high temperature resistance and chemical resistance to acids and alkalis. It is UV stabilised making it resistant to ozone effects and extreme weather conditions so it is ideal for long term outdoor applications. Proflex Commercial EPDM has excellent physical properties including, mechanical strength and is resistant to hot water and steam. It will not deteriorate when submerged in fresh or seawater making it suitable for marine applications and aquatic environments.









Proflex rubber comes in a 10m roll, or can be cut to any length. A cutting fee will apply to any cut length.

FEATURES

- Ideal for boats, ramps, chillers, marine and aquatic environments, low temperatures
- UV stabilised
- Marine grade
- Can be cut to custom lengths
- Available in four thicknesses
- Indoor/outdoor use



PROFLEX PREMIUM EPDM CONT.

	CODE (CUSTOM LENGTH PER M)	THICKNESS (MM)	WIDTH (MM)
25MM WIDE 	EPDM1.5/25W	1.5	25
	EPDM3/25W	3	25
	EPDM4.5/25W	4.5	25
	EPDM6/25W	6	25
50MM WIDE 	EPDM1.5/50W	1.5	50
	EPDM3/50W	3	50
	EPDM4.5/50W	4.5	50
	EPDM6/50W	6	50
75MM WIDE 	EPDM1.5/75W	1.5	75
	EPDM3/75W	3	75
	EPDM4.5/75W	4.5	75
	EPDM6/75W	6	75
100MM WIDE 	EPDM1.5/100W	1.5	100
	EPDM3/100W	3	100
	EPDM4.5/100W	4.5	100
	EPDM6/100W	6	100
150MM WIDE 	EPDM1.5/150W	1.5	150
	EPDM3/150W	3	150
	EPDM4.5/150W	4.5	150
	EPDM6/150W	6	150
200MM WIDE 	EPDM1.5/200W	1.5	200
	EPDM3/200W	3	200
	EPDM4.5/200W	4.5	200
	EPDM6/200W	6	200
300MM WIDE 	EPDM1.5/300W	1.5	300
	EPDM3/300W	3	300
	EPDM4.5/300W	4.5	300
	EPDM6/300W	6	300
1200MM WIDE 	EPDM15W	1.5	1200
	EPDM30W	3	1200
	EPDM45W	4.5	1200
	EPDM60W	6	1200

*Mat sizes may vary + / - 5%. All rolls are 10m long. A cutting fee applies to any cut length less than 10m.