

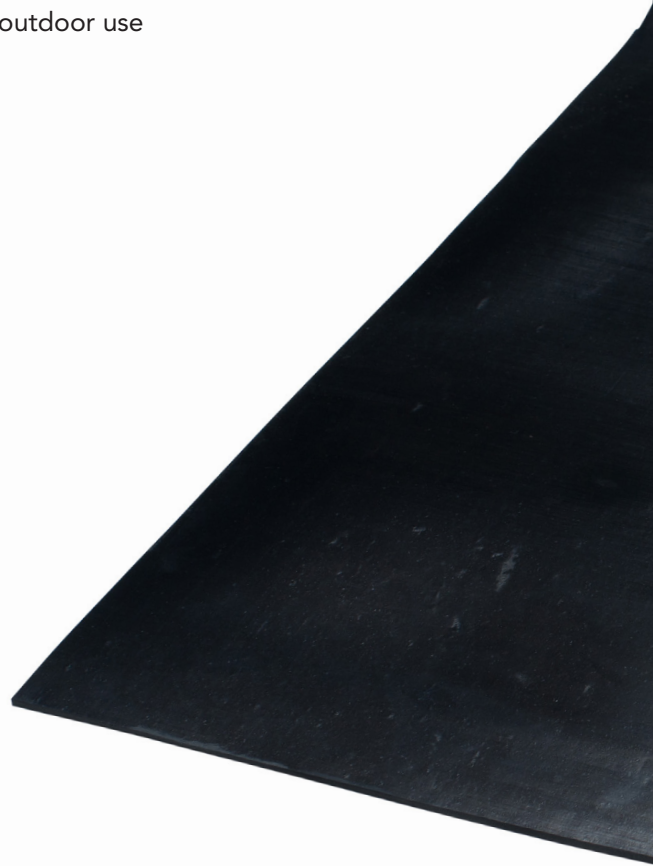


Proflex Premium EPDM has high temperature resistance and chemical resistance to acids and alkalis. It is completely UV stabilised making it resistant to ozone effects and extreme weather conditions so it is ideal for long term outdoor applications. Proflex Premium EPDM has excellent physical properties including, mechanical strength and is resistant to hot water and steam. It will not deteriorate when submerged in fresh or seawater making it suitable for marine applications and aquatic environments.









Proflex rubber comes in a 10m roll, or can be cut to any length. A cutting fee will apply to any cut length.

FEATURES

- Ideal for boats, ramps, chillers, marine and aquatic environments, low temperatures
- UV stabilised
- Marine grade
- Can be cut to custom lengths
- Available in four thicknesses
- Indoor/outdoor use



PROFLEX PREMIUM EPDM CONT.

	CODE (CUSTOM LENGTH PER M)	THICKNESS (MM)	WIDTH (MM)
25MM WIDE 	EPDMP1.5/25W	1.5	25
	EPDMP3/25W	3	25
	EPDMP4.5/25W	4.5	25
	EPDMP6/25W	6	25
50MM WIDE 	EPDMP1.5/50W	1.5	50
	EPDMP3/50W	3	50
	EPDMP4.5/50W	4.5	50
	EPDMP6/50W	6	50
75MM WIDE 	EPDMP1.5/75W	1.5	75
	EPDMP3/75W	3	75
	EPDMP4.5/75W	4.5	75
	EPDMP6/75W	6	75
100MM WIDE 	EPDMP1.5/100W	1.5	100
	EPDMP3/100W	3	100
	EPDMP4.5/100W	4.5	100
	EPDMP6/100W	6	100
150MM WIDE 	EPDMP1.5/150W	1.5	150
	EPDMP3/150W	3	150
	EPDMP4.5/150W	4.5	150
	EPDMP6/150W	6	150
200MM WIDE 	EPDMP1.5/200W	1.5	200
	EPDMP3/200W	3	200
	EPDMP4.5/200W	4.5	200
	EPDMP6/200W	6	200
300MM WIDE 	EPDMP1.5/300W	1.5	300
	EPDMP3/300W	3	300
	EPDMP4.5/300W	4.5	300
	EPDMP6/300W	6	300
1200MM WIDE 	EPDMP15W	1.5	1200
	EPDMP30W	3	1200
	EPDMP45W	4.5	1200
	EPDMP60W	6	1200

*Mat sizes may vary + / - 5%. All rolls are 10m long. A cutting fee applies to any cut length less than 10m.