

PROFLEX PREMIUM NITRILE




Proflex Premium Nitrile displays excellent resistance to oils, petroleum, alcohols, silicone greases, hydraulic fluids. Premium Nitrile Rubber is mostly used where high oil resistance is required, as in automotive seals, gaskets, or other items subject to contact with hot oils. Premium Nitrile Rubber does perform very well under extreme temperatures however has weaknesses in dealing with outdoor conditions and reacts badly to ozone, sunlight, and weather, and is also not very flame resistant.





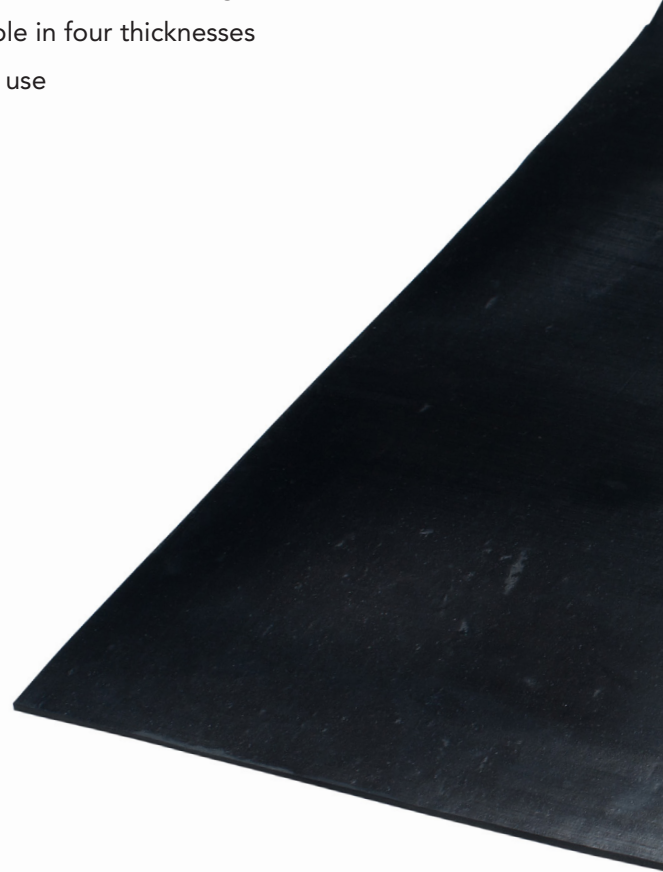



Proflex rubber comes in a 10m roll, or can be cut to any length. A cutting fee will apply to any cut length.

FEATURES

- Ideal for use around petroleum, conveyors, chemical plants, liners, sealing, high & low temperatures
- 70% nitrile rubber
- Great chemical resistance to oil & grease
- Good mechanical strength
- Can be cut to custom lengths
- Available in four thicknesses
- Indoor use



PROFLEX PREMIUM NITRILE CONT.

	CODE (CUSTOM LENGTH PER M)	THICKNESS (MM)	WIDTH (MM)
25MM WIDE 	NBRP1.5/25W	1.5	25
	NBRP3/25W	3	25
	NBRP4.5/25W	4.5	25
	NBRP6/25W	6	25
50MM WIDE 	NBRP1.5/50W	1.5	50
	NBRP3/50W	3	50
	NBRP4.5/50W	4.5	50
	NBRP6/50W	6	50
75MM WIDE 	NBRP1.5/75W	1.5	75
	NBRP3/75W	3	75
	NBRP4.5/75W	4.5	75
	NBRP6/75W	6	75
100MM WIDE 	NBRP1.5/100W	1.5	100
	NBRP3/100W	3	100
	NBRP4.5/100W	4.5	100
	NBRP6/100W	6	100
150MM WIDE 	NBRP1.5/150W	1.5	150
	NBRP3/150W	3	150
	NBRP4.5/150W	4.5	150
	NBRP6/150W	6	150
200MM WIDE 	NBRP1.5/200W	1.5	200
	NBRP3/200W	3	200
	NBRP4.5/200W	4.5	200
	NBRP6/200W	6	200
300MM WIDE 	NBRP1.5/300W	1.5	300
	NBRP3/300W	3	300
	NBRP4.5/300W	4.5	300
	NBRP6/300W	6	300
1200MM WIDE 	NBRP15W	1.5	1200
	NBRP30W	3	1200
	NBRP45W	4.5	1200
	NBRP60W	6	1200

*Mat sizes may vary + / - 5%. All rolls are 10m long. A cutting fee applies to any cut length less than 10m.