



Color: Black

Weight: 2.7 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

| Type        | Constant Current |
|-------------|------------------|
| 120V        | 0.17A            |
| 208V        | 0.10A            |
| 240V        | 0.09A            |
| 277V        | 0.08A            |
| Input Watts | 20/16/12WW       |

LED Info

|                |                               |
|----------------|-------------------------------|
| Watts          | 20/16/12WW                    |
| Color Temp     | 2700K/3000K/3500K/4000K/5000K |
| Color Accuracy | 90 CRI                        |
| L70 Lifespan   | 50,000 Hours                  |
| Lumens         | 1900/1520/1140 lm             |
| Efficacy       | 95                            |

Technical Specifications

Performance

Product Type:

Cylinder Surface Pendant Mount

Description :

Economical cylinders with field-adjustable color temperature, power and light distribution along with field-swappable optics to fit any indoor or outdoor application.

Wattage Equivalency:

125/100/75W

Input Wattage:

20/16/12W

Nominal Lumens:

1900/1520/1140lm

Efficacy:

95lm/W

Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Electrical

Driver:

Constant Current, 50-60 Hz, 120V-277V

THD:

≤20%

Power Factor:

≥0.9

Dimmable:

Yes, dimmable down to 5% on compatible 0-10V dimming systems. See Dimmer Compatibility List. Requires separate 0-10V DC dimming circuit.

Input Voltage:

120-277V

Operating Frequency:

50/60Hz

Input Current @ 120V (mA):

165mA

Input Current @ 208V (mA):

98mA

Input Current @ 240V (mA):

85mA

Input Current @ 277V (mA):

75mA

Operating Temperature:

-40°F to 120°F (-40°C to 45°C)

Flicker:

≤1%

LED Characteristics

Beam Angle:

60° (installed)  
Field swappable optics sold separately for 25°/40°/60° beam angle\_

Light Distribution:

Down

Color Temperature:

2700/3000/3500/4000/5000K

Color Accuracy (CRI):

90 CRI

R9 Value:

High color performance with R9 greater than 0

Color Consistency:

<6-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Installation

Mounting:

Surface or Pendant mount (pendant stem sold separately)

Technical Specifications (continued)

Construction

Size:

4"

Shape:

Cylinder

Finish:

Black

Enclosure Material:

Die-casting aluminum + PC

Lens Finish:

Clear (installed)

Frosted lens accessory sold separately

Compliance

Listings:

UL Listed

Environment:

Suitable for use indoors and outdoors in dry, damp, or wet environments.

Fixture Rating:

Suitable for use in open fixtures

Energy Star Approved:

No

DLC Listed:

No

Certification Model Number:

CD2014(CD34-4SPK)

California Title 20 Compliant:

No

California Title 24 JA8 Compliant:

No

California Energy Commission (CEC) Status:

Lawful for Sales in California

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15 of the FCC Rules

Other

Compatible Accessories:

CD34REF-625D  
25° reflector

CD34REF-640D  
40° reflector

CD34REF-660D  
60° reflector

CD34LENS-6FRW  
6" frosted lens white

CD34LENS-6FRK  
6" frosted lens black

CD34LENS-6FRZ  
63" frosted lens bronze

CD34STEM-K  
Pendant stem black

CD34STEM-Z  
Pendant stem bronze

CD34STEM-W  
Pendant stem white


Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

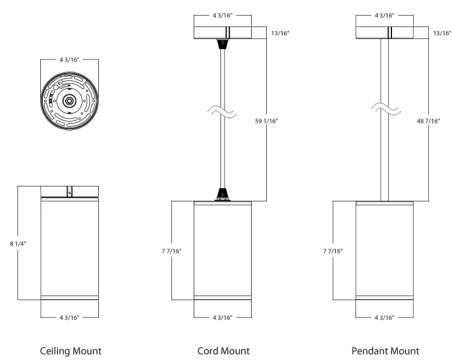

Features

- Aluminum extrusion housing and die-cast covers available in black, bronze, or white
- Field interchangeable optics sold separately for 25°/40°/60° beam angle
- Field-adjustable color temperature 3000/4000/5000K (indoor); 2700/3000/3500/4000/5000K (outdoor).
- Dimmable on 0-10V systems (indoor); integrated photocell (outdoor)

Ordering Matrix

| Family                                 | Size/Wattage | Mounting                | CRI/Color Temp                  | Driver                                    | Finish                               |
|----------------------------------------|--------------|-------------------------|---------------------------------|-------------------------------------------|--------------------------------------|
| CD34                                   | 4            | SP                      |                                 |                                           | K                                    |
| 4 = 4", 20/16/12W<br>6 = 6", 30/24/18W |              |                         |                                 |                                           |                                      |
|                                        |              | SP = Surface or Pendant |                                 | Blank = 90 CRI, 2700/3000/3500/4000/5000K |                                      |
|                                        |              |                         | Blank = 120-277V, 0-10V Dimming |                                           | W = White<br>K = Black<br>Z = Bronze |