

2300W, 3400W & 4500W SERIES BLACK | WHITE

PLATINUM SMART-HEAT™ ELECTRIC MARINE

Made in high-quality, AISI316-grade stainless-steel, our Platinum Smart-Heat[™] Electric Marine heaters were specifically engineered to provide superior resistance to the corrosive elements of marine and coastal environments. Available in a white or black finish, the translucent ceramic glass screen spreads radiant heat evenly across large areas while minimizing light emission.

2300W, 3400W & 4500W SERIES BLACK | WHITE

BROMIC



SPECIFICATIONS

Reference the specification guide below to help you select the correct solution for your needs.


MODEL NUMBER	2300W SERIES	3400W SERIES	4500W SERIES
PRODUCT CODES PLATINUM ELECTRIC MARINE	BH0320015 BH0320017 BH0320023 BH0320024	BH0320016 BH0320018 BH0320025 BH0320026	BH3622002 BH3622006 BH3622003 BH3622007
FUEL TYPE	ELECTRIC	ELECTRIC	ELECTRIC
COLOR	BLACK WHITE	BLACK WHITE	BLACK WHITE
HEAT AREA	65FT ²	108FT ²	143FT ²
RATED CURRENT**	220 - 240V/9.6A 208V/11.1A	220 - 240V/14.2A 208V/16.3A	220 - 240V/18.8A 208V/21.6A
MINIMUM FLOOR CLEARANCE	WALL 72" CEILING 96"	WALL 72" CEILING 96"	WALL 72" CEILING 96"
MOUNTING OPTIONS			
CEILING MOUNT	INCLUDED	INCLUDED	INCLUDED
WALL MOUNT	INCLUDED	INCLUDED	INCLUDED
RECESS KIT FLUSH MOUNT	\checkmark	✓	\checkmark
CEILING RECESS KIT PRODUCT CODES	BH3130034	BH3130035	BH3623001
NEW RECESS KIT LOW CLEARANCE	\checkmark	\checkmark	-
LOW CLEARANCE RECESS KIT PRODUCT CODES	BH3623011	BH3623010	-
CEILING POLE EXTENSION	\checkmark	\checkmark	\checkmark
CEILING POLE (2') PRODUCT CODE	BH3130046	BH3130046	BH3623022
CEILING POLE (4') PRODUCT CODE	BH3130047	BH3130047	BH3623023
FREESTANDING	-	-	•
CONTROL OPTIONS			
ON OFF	\checkmark	\checkmark	\checkmark
ON OFF PRODUCT CODE	BH3130010-1	BH3130010-1	BH3130010-1
DIMMER	\checkmark	\checkmark	✓
DIMMER PRODUCT CODE	BH3130011-1	BH3130011-1	BH3130011-1
MASTER REMOTE *	\checkmark	\checkmark	\checkmark
MASTER REMOTE PRODUCT CODE	BH3130012-1	BH3130012-1	BH3130012-1

* Control up to six zones of heaters with unlimited heaters per zone from a single remote control. Dimmer control required. Works with dimming controllers. Remote control operates within 100ft of heaters. ** Available in 208V and 220-240V configurations.

Measurements displayed within this document are for reference only, for complete requirements see the installation/user manual. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this document are displayed in inches.


DIMENSIONS


With a wide range of sizes available, find the ideal heater to suit your outdoor space.

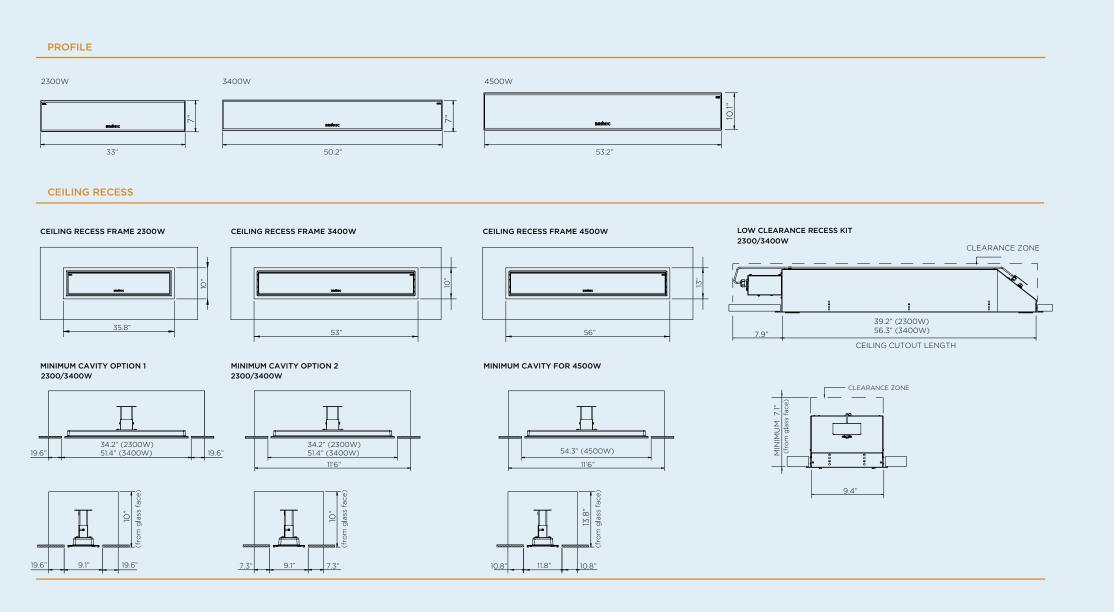

HEATING REACH

Creating ideal comfort levels, Bromic heaters offer a variety of heat distribution options to suit your outdoor heating needs.

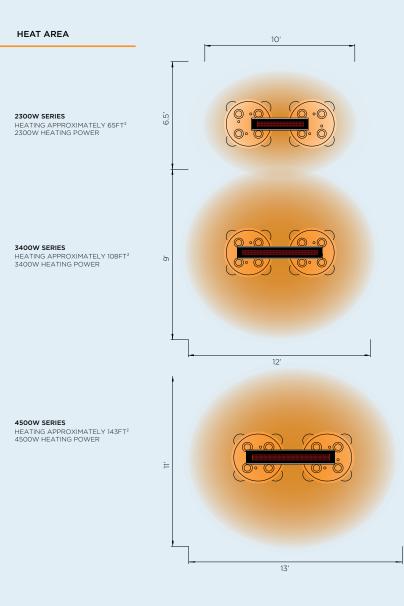

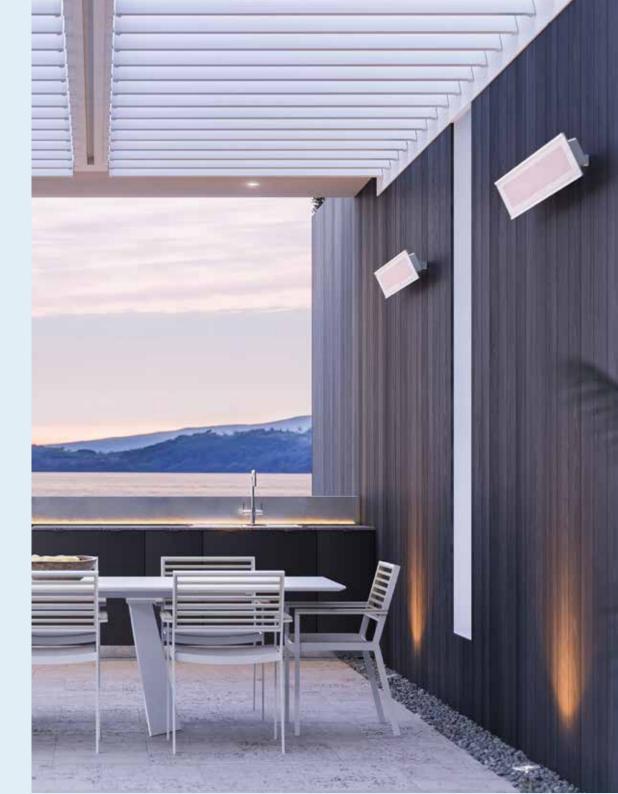

EXTEND YOUR COMFORT OUTDOORS WITH THE SUPERIOR HEAT AND AWARD-WINNING DESIGN OF OUR SMART-HEAT[™] OUTDOOR HEATERS. VERSATILE MOUNTING SOLUTION Minimal ceiling recess clearance required. Flush mounted design aesthetics.

> HIGH PERFORMANCE STAINLESS-STEEL CONSTRUCTION Premium 316 grade stainless-steel suitable for marine and coastal environments.

BROMIC

SEALED ELEMENT Sealed compartment with thin film elements to prevent corrosion.

BROMIC.COM

ASIA PACIFIC | NORTH AMERICA | EUROPE

Bromic pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

CLEAN, COMPACT AND ELEGANT DESIGN Minimized light emissions and easy to clean in a black or white finish.

> COMPATIBLE WITH SMART-WIRELESS TECHNOLOGY