




TEKWARM

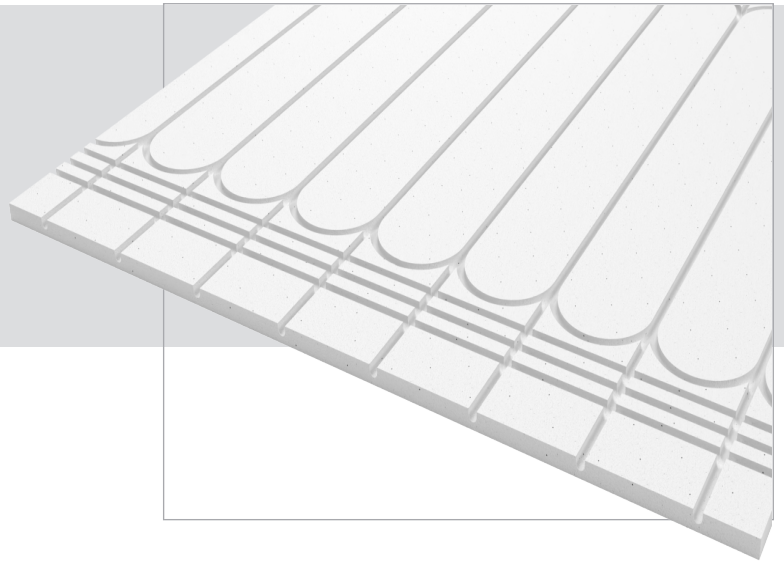

TEKWARM

EPS UFH BOARD

Lightweight Expanded Polystyrene insulation available in 70, 100, 150, 200 and 250 grades, routed on one side to allow for fast and easy pipe installation.

Tekwarm EPS UFH Board is manufactured from CFC and HCFC free EPS, grooved on one face as required to suit either 12 or 16mm diameter underfloor heating pipes, with radius returns as standard.

The panel size is 1200mm x 1200mm and boards are available in a range of thicknesses starting at 15mm, in 5mm increments.

Other routed pipe layouts and patterns are available, further details upon request.

INSTALLATION

Tekwarm EPS UFH Board allow for a speedy installation over a solid ground floor on a suitable DPM. The boards are also suitable for use over other substrates when installed in a fully supported application, with a DPM as necessary.

SUITABLE FOR

Tekwarm Gridboard UFH Board is suitable for use in new build or retro fit installations.

DURABILITY

Tekwarm Gridboard UFH Board is designed to last for the life of the building without any loss in thermal performance and is rot proof and will not promote the growth of mould or fungi.

ENVIROMENTAL

Tekwarm Gridboard UFH Board Expanded Polystyrene has a Global Warming Potential (GWP) of zero and a low O-Zone Depletion Potential (ODP). Our Expanded Polystyrene is 100% recyclable.