



# **SON-T**

## **SON-T 400W E E40 SL/12**

High Pressure Sodium lamp with clear tubular outer bulb

#### **Warnings and Safety**

- $\cdot$  Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information			
Cap base	E40 [ E40]		
Burning Position	UNIVERSAL [ Any/Universal]		
Life to 5% failures (nom.)	12000 h		
Life to 20% failures (nom.)	20000 h		
Life to 50% failures (nom.)	28000 h		
System description	External Ignitor (E)		
Light Technical			
Colour Code	220 [ CCT of 2,000 K]		
Lamp Luminous Flux (Min)	43200 lm		
Lamp Luminous Flux (Nom)	48000 lm		
Lumen maintenance 2,000 hours (min.)	94 %		
Lumen maintenance 2,000 hours (nom.)	97 %		
Lumen maintenance 5,000 hours (min.)	88 %		
Lumen maintenance 5,000 hours (nom.)	94 %		
Colour Temperature, horizontal (Nom)	2000 K		
Lamp Luminous Efficacy EM (Nom)	123 lm/W		
Colour Rendering Index,horiz (Max)	25		


Colour Rendering Index,horiz (Nom)	-
Operating and Electrical	
Power (Rated) (Nom)	392.0 W
Lamp current (EM) (nom.)	4.6 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	2800 V
Re-ignition time (min.) (max.)	120 s
Ignition time (max.)	5 s
Voltage (Max)	115 V
Voltage (Min)	85 V
Voltage (Nom)	100 V
Controls and Dimming	
Dimmable	Yes
Run-up time 90% (max.)	5 min
Mechanical and Housing	
Lamp Finish	Clear
Cap-base information	na [ -]

Datasheet, 2022, January 14 data subject to change

Bulb shape	T46 [ T 46mm]		
Approval and Application			
Mercury (Hg) content (nom.)	24.5 mg		
Energy consumption kWh/1,000 hours	431 kWh		
Luminaire Design Requirements			
Bulb temperature (max.)	450 °C		
Cap-base temperature (max.)	250 °C		
Product Data			
Full product code	871829121292800		


Order product name	SON-T 400W E E40 SL/12		
EAN/UPC – product	8718291212928		
Order code	928487300098		
SAP numerator – quantity per pack	1		
Numerator – packs per outer box	12		
SAP material	928487300098		
SAP net weight (piece)	0.181 kg		


## Dimensional drawing




Product	D (max)	0	L	C (max)
SON-T 400W E E40 SL/12	47 mm	82 mm	175 mm	286 mm

## Photometric data





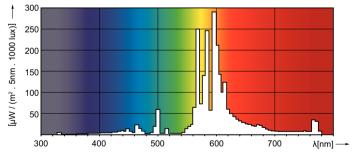



LDLD\_SON-T-Light distribution diagram

LDPO\_SON-T-Spectral power distribution Colour

### **SON-T**

#### Lifetime

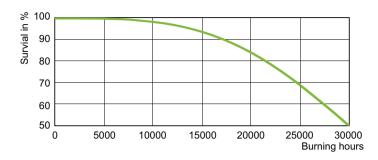

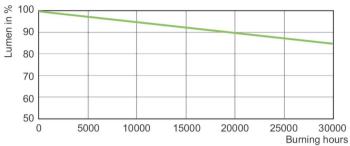

LDLE\_SON-T\_0001-Life expectancy diagram

LDLM\_SON-T\_0001-Lumen maintenance diagram

