


ISOMAX 200 - 870 3 speed

TECHNICAL DATASHEET

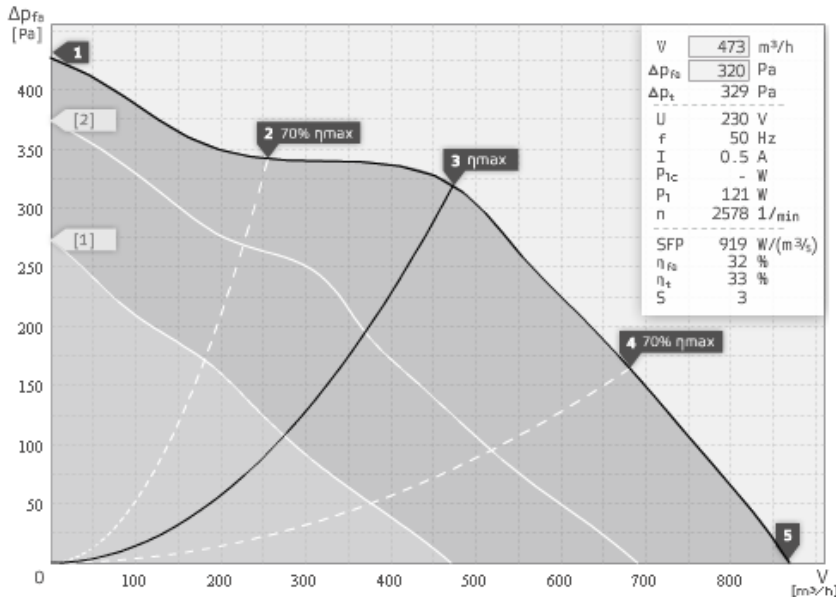

- ETALINE sound insulated
- Galvanized metal housing
- With 3-step switch
- Integrated thermal switch
- With mounting brackets for hanging

Operating Point		1	2	3	4	5
Current I	A	0,4	0,5	0,5	0,6	0,5
Power Consumption P1	W	91	101	121	128	121
RPM n	1/min	2822	2756	2578	2510	2601
SPL inlet LWA5	dB(A)	70	65	63	64	68
SPL outlet LWA6	dB(A)	73	68	65	67	71
SPL casing break out LWA2	dB(A)	60	60	56	54	59

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	62	33	44	58	56	53	55	52	43
Outlet	LWA6	64	34	43	61	60	58	49	50	41
Casing	LWA2	55	33	34	52	49	43	50	36	26

ELIX 200 E2S 01 123325	
Voltage UN	230 V 1~
Current Imax	0,6
Ambient Temperature tA	45 °C
Medium Temperature tM	45 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	0 kg

