


Effective: March 2008

## Rapid Thread<sup>™</sup> FILM DELIVERY SYSTEM RETRO-FIT SURVEY FORM

| DATE:   |   |
|---|---|
|   |   |
| Address:  |   |
| City, State, Zip:   |   |
| Telephone:  | _Fax:                                       |
| Contact:  | _Title:                                     |
|   |   |
| Address:  |   |
| City, State, Zip:   |   |
| Telephone:  | _Fax:                                       |
| Contact:  | _Title:                                     |
| CURRENT SYSTEM NAME?  | MODEL?                                      |
| DOES IT HAVE A PRE-STRETCH CARRIAGE?  | YesNo SYSTEM AGE?                           |
| SYSTEM TYPE? Semi-autoAutomatic   | Turntable Overhead Horiz.                   |
| CARRIAGE LIFT DRIVE MOTOR SIZE? HP LIFT TYPE? Chain Belt  |   |
| CARRIAGE LIFT DRIVE CONTROLLER? DC  | AC-VFD None                                 |
| DOES SYSTEM HAVE AUTO LOAD HEIGHT SEN   | ISING PHOTO-EYE? YesNo                      |
| IS EXISTING CARRIAGE IN GOOD SHAPE? Yes   | No (if no, needs to be refurbished)         |
| SPECIAL COLOR REQUIRED? YesNo   | <b>COLOR?</b> (standard is gun-metal gray)  |
| PRE-STRETCH LEVEL REQUIRED? % (Cousins standard 207%)   |   |
| HANDING OF CARRIAGE? STANDARD (Film roll on right side when facing carriage)   or OPPOSITE HAND (Film roll on left side when facing carriage) |   |
| BROKEN FILM SENSOR REQUIRED? Yes  | _No (usually required on automatic systems) |
| TILTED CARRIAGE REQUIRED? YesNo   | o (for overhead machines)                   |

Effective: March 2008 Page 2




FILM? Roll Width \_\_\_\_\_ Gauge \_\_\_\_\_ Roll Dia. \_\_\_\_\_ Cling One Side \_\_\_\_\_

MAXIMUM LOAD DIAGONAL? (for determining film output speed)

CARRIAGE ORIENTATION? \_\_\_\_\_Film Roll Vertical (or tilted)

Film Roll Horizontal (requires 2-part mandrel)

DRAWING OF RETROFIT *Rapid Thread*<sup>™</sup> CARRIAGE (verify dimensions to fit proposed system)

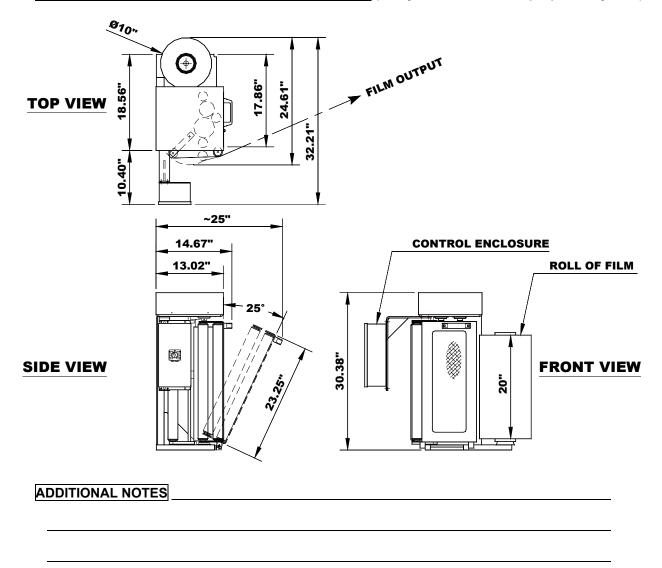

**PLEASE NOTE:** *Rapid Thread* <sup>™</sup> Film Delivery System pre-wired "retro-fit" dispensers are furnished complete (self-contained controls mounted on retro-fit carriage), ready to install and run. The Customer / Distributor is responsible for any mounting bracket attachment, mounting hardware, connecting 115VAC power line from control panel to dispenser and mounting & reconnecting the Auto Load Height Sensing photo-eye (if existing).