

10W COB 360° rotatable LED TRACK LIGHT

V0 **CE** **ROHS** **ERP** **FCC**




NETWEIGHT
0.9 Kg

PACKING
16.5x11x23CM **1 pc**


PACKING
51.5x24.5x35CM **9 pc**

Features:
High color rendering, uniform luminance, no light spot, no dark space. It was different from the lighting effects of general LED TRACK LIGHT in the market, substitute to the traditional lamp completely, and no maladjustment

Application :
Products are widely used as indoor main illumination lighting in the office, commercial center, shopping mall, supermarket, factory, etc.

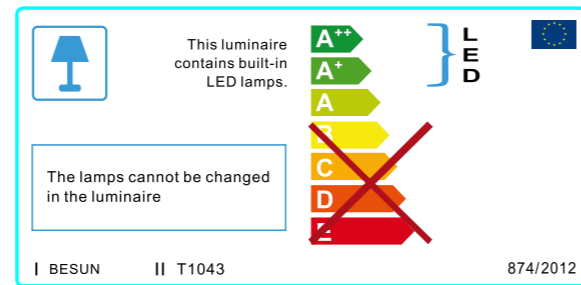

10W COB light source :

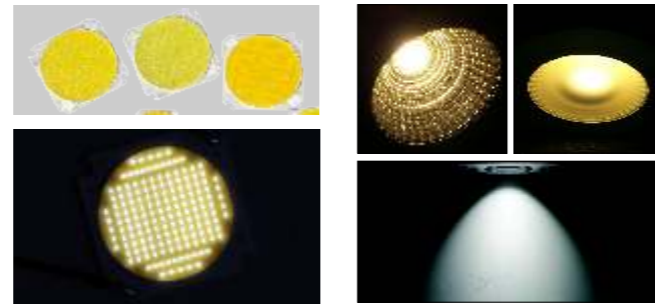


LED	Standard	Super-bright
Power/PCB	10W/Ceramic	
CCT	2700K ,3000K,4000K,6000K	
CRI	CRI>80	
EFF	100-120lm/W	130-150lm/W
Voltage	28-32VDC,350mA	




Lamp Parameters :	Standard	Super-bright
Input Voltage	AC100-277V / AC180-277V	
Frequency Range	50Hz~60Hz	
Led Consumption	10W	
System Consumption	11.5W	
Led Initial Flux	900-1100LM	1150LM-1350LM
Color Rendering Index	>80	
Working Temperature	-40°C ~ +55°C	
Fireproof Class	V0	
Track light holder	2-wires, 3-wires, 4-wires,	
Color of housing	black,white,silver	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	

Driver Parameters :	
Brand	Lifud
Input	AC100-277V / AC180-277V
Output	27-42VDC,350mA
Power Factor	0.9-0.97
Power Efficiency	87%
Certificate	UL,FCC,CE,SAA,PSE,CQC,TUV UL Certificate Number:E338140 SAA Certificate Number:TUV16071EA
Dimmable	Triac / dali
MEANWELL: PLD-16-350 is optional	


Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
T1021	30°/50°	>80	3000K	900LM	1150LM	AC100-277V AC180-277V
T1031			4000K	950LM	1250LM	
T1043			6000K	1100LM	1350LM	

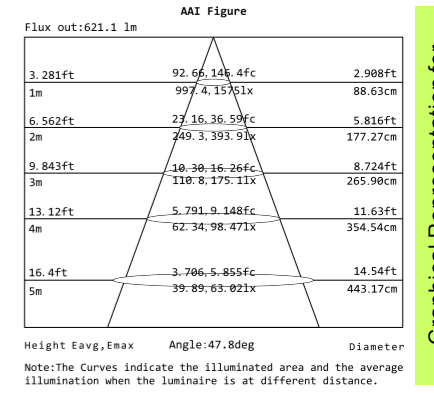


Graphical Representation for
D1095 WW 50° (S)

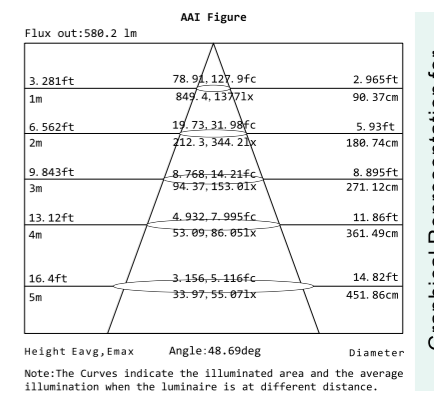

Graphical Representation for
D1095 NW 50°

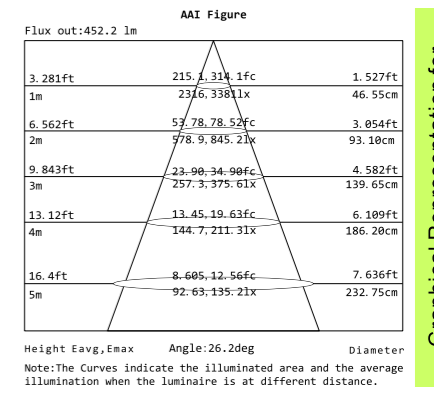

Graphical Representation for
D1095 NW 30° (S)

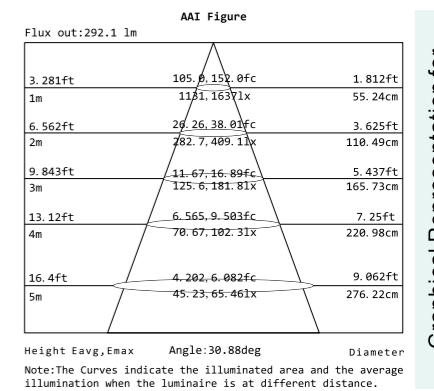

Graphical Representation for
D1095 WW 30°

