

# 30W COB 360° rotatable LED TRACK LIGHT

**V0** **CE** **ROHS** **ERP** **FCC**




**NETWEIGHT**  
1.75 Kg

**PACKING**  
23.5x16x28CM 1 pc


**PACKING**  
72.5x29.5x50CM 9 pc

**Features:**  
High color rendering, uniform luminance, no light spot, no dark space. It was different from the lighting effects of general LED TRACK LIGHT in the market, substitute to the traditional lamp completely, and no maladjustment

**Application :**  
Products are widely used as indoor main illumination lighting in the office, commercial center, shopping mall, supermarket, factory, etc.

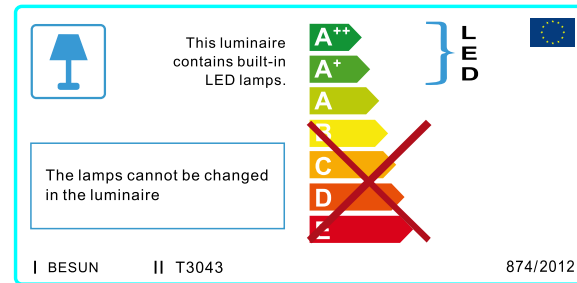

### 30W COB light source :

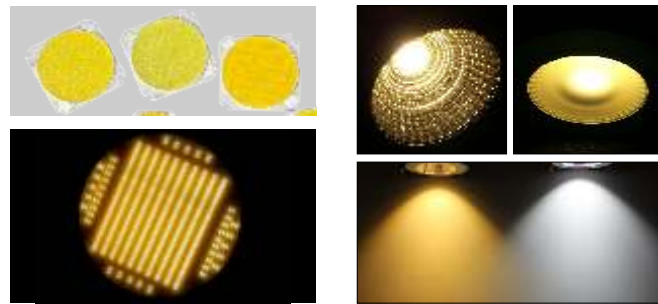


LED	Standard	Super-bright
Power/PCB	30W/Ceramic	
CCT	2700K ,3000K,4000K,6000K	
CRI	CRI>80	
EFF	100-120lm/W	130-150lm/W
Voltage	28-32VDC,1050mA	




Lamp Parameters :	Standard	Super-bright
Input Voltage	AC100-277V / AC180-277V	
Frequency Range	50Hz~60Hz	
Led Consumption	30W	
System Consumption	34.5W	
Led Initial Flux	2550-2750LM	3300-3700
Color Rendering Index	>80	
Working Temperature	-40°C ~ +55°C	
Fireproof Class	V0	
Track light holder	2-wires, 3-wires, 4-wires,	
Color of housing	black,white,silver	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	

Driver Parameters :	
Brand	Lifud
Input	AC100-277V / AC180-277V
Output	27-42VDC,1000mA
Power Factor	0.9-0.96
Power Efficiency	87%
Certificate	UL,FCC,CE,SAA,PSE,CQC,TUV UL Certificate Number:E338140 SAA Certificate Number:TUV16071EA
Dimmable	Triac / dali
MEANWELL:LPF-40 is optional	


Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
T3021 T3031 T3043	25°/55°	>80	3000K	2550LM	3300LM	AC100-277V AC180-277V
			4000K	2650LM	3500LM	
			6000K	2750LM	3700LM	

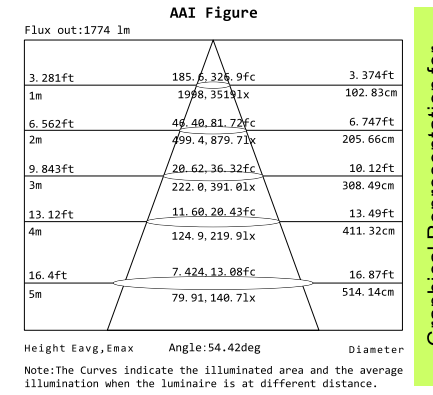


Graphical Representation for  
D30145 WW 55° (S)

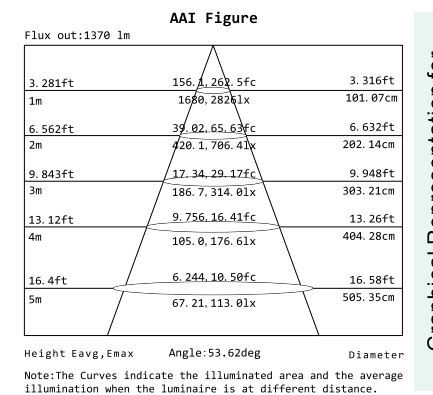

Graphical Representation for  
D30145 WW 55°

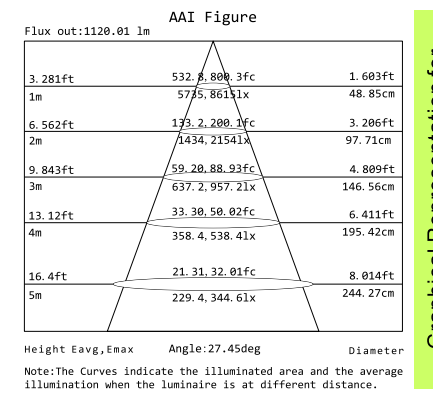

Graphical Representation for  
D30145 NW 25° (S)

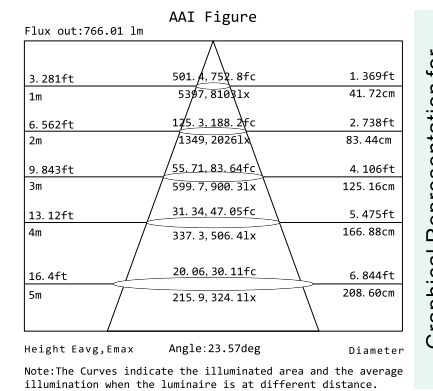

Graphical Representation for  
D30145 NW 25°

