

:::UVC SERIES:::
3535 6.48W/M 90LED

:::Electrical Parameter:::


LED QTY	18/M
Colour/CCT	265-275nm
Chip	EPISTAR
Power	6.48W/M
Irradiance	11mw/Chip
Voltage	DC 12V Input
Cut length	1LED/33mm
PCB Width	10mm/3oz/ WHT
Connection	2*20AWG / RED'+'/ BLK'-'
Packing	Carton box
Installation	55280 3M tape
Max run length	5meters
Lifespan & warranty	50,000Hrs /3years
Dimmable	N
Beam Angle	120°
Certificate	CE, RoHS, UL

DESCRIPTION

- Double sided 3M tape backing
- Flexible LED lights
- Low power Consumption
- Low heat emitting
- Easy to install
- Long lasting UVC but low voltage

UV disinfection

Deep ultraviolet rays with a wavelength of 240-280nm can destroy the DNA or RNA structure of bacteria and cause the death of bacteria

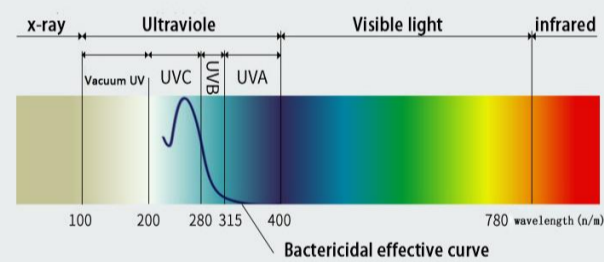

APPLICATION

- Air conditioning units
- Air filtration devices
- Virus & Bacteria sanitisation



:::Packing::: 16.4FT Spool

