



 Lexmark™

Lexmark CS735de

Color made easy



 Unison™
TONER

Works with
 Apple AirPrint

 mopria

 IPP
Everywhere™

 ENERGY STAR

 epeat
SILVER

Lexmark CS735de

Designed for security, ease of use, and sustainability, the Lexmark CS735de delivers professional color for mid-to-large workgroups at speeds up to 52 pages per minute*. The 4.3-inch (10.9 cm) tablet-like touchscreen makes completing your printing tasks intuitively easy. Replacement cartridges with Unison™ Toner yield up to 22,000/12,500 black/color pages** to keep you going.

Make a statement with professional color

Enjoy the benefits of vibrant, professional-quality output allowing you to do more color printing in-house—saves time and money. Match corporate colors on marketing collateral and brand-sensitive text and graphics with PANTONE® calibration and Lexmark Named Color Replacement.

Made to last. Easy to upgrade.

- ▶ With durable steel frames, long-life components and high-yield cartridges, printers are intentionally engineered to last seven years or more.
- ▶ Long-lasting Unison™ Toner delivers consistently outstanding print quality, reduces internal wear on long-life components, and protects the print system.
- ▶ Easily upgradable to the latest apps and security features.



Always easy. Always intuitive.

- ▶ Powerful features are easy to use.
- ▶ Large, tablet-like, button-free touchscreens help you

intuitively complete every task, from the basic to the complex.

- ▶ Add Lexmark or third-party apps to meet your specific business needs.

Secure by design

- ▶ Lexmark security features help keep your information safe—in the document, on the device, over the network and at all points in between.
- ▶ Always improving security, we now include a standard Trusted Platform Module***, which delivers authentication, system integrity checks, and cryptographic capabilities to create a unique digital system fingerprint.

Sustainability matters

- ▶ Designed for the circular economy.
- ▶ Automatic two-sided printing is standard, along with built-in energy-saving modes that help support ratings of EPEAT® Silver and ENERGY STAR® certified.
- ▶ The award-winning Lexmark Cartridge Collection Program (LCCP) and Lexmark Equipment Collection Program (LECP) minimize waste and support recycling (availability varies by country).

Power up with IoT

- ▶ Sophisticated, IoT-enabled printers are loaded with sensors that continuously monitor hundreds of data points.
- ▶ When you connect your device to Lexmark Cloud Services, you can optimize performance and uptime with additional features like predictive service and automatic supplies replenishment.


This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: www.lexmark.com/ISOspeeds.

** Average continuous black or continuous composite color (CMY) declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19798. Actual yield will vary considerably based upon many factors. See www.lexmark.com/yields for more information. In demonstration of circular economy principles, genuine Lexmark supplies with Unison™ Toner may contain components recovered from the Lexmark Cartridge Collection Program (LCCP).

*** The Trusted Platform Module (TPM) is not available in some countries.

Lexmark CS735de

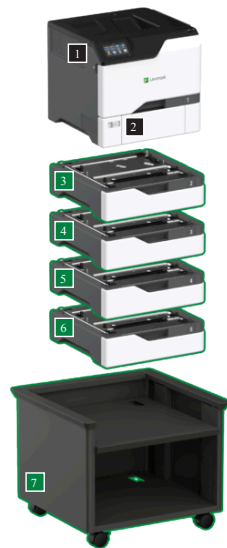

1 Printer with 4.3-inch (10.9 cm) touch screen

16.25 x 18.85 x 19.25 in.
413 x 479 x 489 mm

2 550-Sheet tray with 100-sheet multipurpose feeder

Dimensions included as part of base model

3 550-Sheet Tray

4.7 x 18.23 x 19 in.
119 x 463 x 483 mm

4 550-Sheet Tray

4.7 x 18.23 x 19 in.
119 x 463 x 483 mm

5 550-Sheet Tray

4.7 x 18.23 x 19 in.
119 x 463 x 483 mm

6 550-Sheet Tray

4.7 x 18.23 x 19 in.
119 x 463 x 483 mm

7 Adjustable Stand

20.5 x 25.7 x 24.6 in.
521 x 653 x 625 mm

 Standard

 Optional

P/N
47C9100
Hardware
Lexmark CS735de

P/N
71C0H10
71C0W00
71C0X20
71C0X30
71C0X40
71C0Z10
71C0Z50
71C10C0
71C10K0
71C10M0
71C10Y0
71C1HK0
71C1XC0
71C1XM0
71C1XY0
Supplies
Lexmark CS730, 735, CX730 Black 22K Toner Cartridge
Lexmark CS/CX730, 735, C/XC4342, C4352 170K Waste Container
Lexmark CS735 Cyan 12.5K Toner Cartridge
Lexmark CS735 Magenta 12.5K Toner Cartridge
Lexmark CS735 Yellow 12.5K Toner Cartridge
Lexmark CS/CX730, 735, C/XC4342, C/XC4352 Black 150K Imaging Unit
Lexmark CS/CX730, 735, C/XC4342, C/XC4352 Color (CMY) 150K Imaging Unit
Lexmark CS/CX730, 735 Cyan Return Program 5K Toner Cartridge
Lexmark CS/CX730, 735 Black Return Program 5K Toner Cartridge
Lexmark CS/CX730, 735 Magenta Return Program 5K Toner Cartridge
Lexmark CS/CX730, 735 Yellow Return Program 5K Toner Cartridge
Lexmark CS730, 735, CX730 Black Return Program 22K Toner Cartridge
Lexmark CS735 Cyan Return Program 12.5K Toner Cartridge
Lexmark CS735 Magenta Return Program 12.5K Toner Cartridge
Lexmark CS735 Yellow Return Program 12.5K Toner Cartridge

P/N
40C2100
Paper Handling
550-Sheet Tray

P/N
27X0400
57X0070
57X9528
Memory Options
500+ GB Hard Disk
Removable Hard Disk Enclosure Kit
Intelligent Storage Device (ISD)

P/N
57X0300
57X0301
82S1203
82S1204
Application Solutions
Contact Authentication Device
Contactless Authentication Device
IPDS License
Bar Code License

P/N
1021294
27X0823
27X6410
SPD0001
Connectivity
USB Cable (2-meter)
MarkNet N8370 Wireless for CS720, CS725, CX725
Lexmark MarkNet N8372 802.11 a/b/g/n/ac Wireless Print Server
Surge Protective Device, 110-120V

P/N
40C2300
Furniture
Adjustable Stand

Supports up to four optional 550-sheet trays.

All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at

http://www.lexmark.com/publications/furniture_safety/

IPDS License and Bar Code License require an Intelligent Storage Drive.

Product Specifications		Lexmark CS735de
Printing		
Display	Lexmark e-Task 4.3-inch color touch screen	
Print Speed	Up to: Black: 52 ppm ¹ (Letter) / Color: 52 ppm ¹ (Letter)	
Time to First Page	As fast as: Black: 5.6 seconds / Color: 6.1 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi) / Color: 4800 CQ (2400 x 600 dpi), 1200 x 1200 dpi	
Memory	Standard: 1024 MB / Maximum: 1024 MB	
Hard Disk	Intelligent Storage Drive available; Magnetic Hard Disk available	
Recommended Monthly Page Volume	2000 - 20000 pages ²	
Maximum Monthly Duty Cycle	Up to: 150000 pages per month ³	
Supplies⁴		
Laser Cartridge Yields	up to: 12,500 ⁵ -page Color (CMY) Extra High Yield Cartridges / up to: 22,000 ⁵ -page Black High Yield Cartridge	
Imaging Unit Estimated Yield	Up to: 150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage ⁶	
Cartridge(s) Shipping with Product	5,000 ⁵ -page Black and Color (CMYK) Return Program Toner Cartridges	
Paper Handling		
Included Paper Handling	100-Sheet Multipurpose Feeder, Integrated Duplex, 300-Sheet Output Bin, 550-Sheet Input	
Optional Paper Handling	550-Sheet Tray	
Paper Input Capacity	Up to: Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 2850 pages 20 lb or 75 gsm bond	
Paper Output Capacity	Up to: Standard: 300 pages 20 lb or 75 gsm bond / Maximum: 300 pages 20 lb or 75 gsm bond	
Media Types Supported	Vinyl Labels, Banner Paper, Paper Labels, Card Stock, Plain Paper, Envelopes, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope	
General Information⁷		
Standard Ports	Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear Hi-Speed USB Port Compatible with USB 2.0 Specification (Type A), USB 2.0 Specification Hi-Speed Certified (Type B), One Internal Card Slot	
Optional Network Ports	Internal MarkNet N8370 802.11b/g/n/a Wireless, NFC	
Noise Level	Operating: 53 dBA (Print)	
Specified Operating Environment	Temperature: 10 to 32°C (50 to 90°F) / Altitude: 0 - 2896 Meters (9,500 Feet) / Humidity: 15 to 80% Relative Humidity	
Limited Warranty	See Statement of Limited Warranty: 1-Year Onsite Service, Next Business Day	
Size / Weight	H x W x D: 16.25 x 18.85 x 19.25 in. / 70.54 lb.	
ENERGY STAR Typical Electricity Consumption	TEC: 0.65 kilowatt-hours per week	

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹ Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. Yield stated on cartridge labels, packaging, and printer device menu pages may be substantially lower than final ISO tested yield. For Lexmark's official statement of yield, see ISO yield reports at https://www.lexmark.com/en_us/products/supplies-and-accessories/iso-page-yields/color-laser-reports.html. Update firmware on your device to ensure accuracy of displayed yield. ⁶ Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁷ Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

© 2022 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries and regions. MOPRIA®, the Mopria® Logo, and the Mopria Alliance™ word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT is a trademark of the Green Electronics Council in the United States and other countries. PANTONE® is the property of Pantone LLC. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).

