

SL01N Narrow Up Light

Product Features


- Six lumen settings
- Single source LED chip for greater lux control Locked-in, narrow optic
- Sleek, patented design
- Enhanced strength from through bolt in the knuckle
- Plugs to prevent insect and moisture penetration



Specifications

Fixture Type: Dedicated Low Voltage LED	Operating Voltage: 9V - 15V AC	Lead Wire: 10' 18AWG
Color Temperature: 3000K	Light Source: BRIDGELUX LED	Mounting: 9" ABS Plastic Stake
Material: Marine-Grade, Virgin Brass with a UV Coating	Optics: 12°	Listing: ETL
Finish: Antique Bronze or Raw Brass	Color Rendering Index: 92+	Standard: UL 1838
Wattage: 3W (min) - 12.9W (max)	TM-30 Rf: 91	Rating: IP65
Lumen Output: 230 lm - 730 lm	TM-30 Rg: 98	

Product Drawings

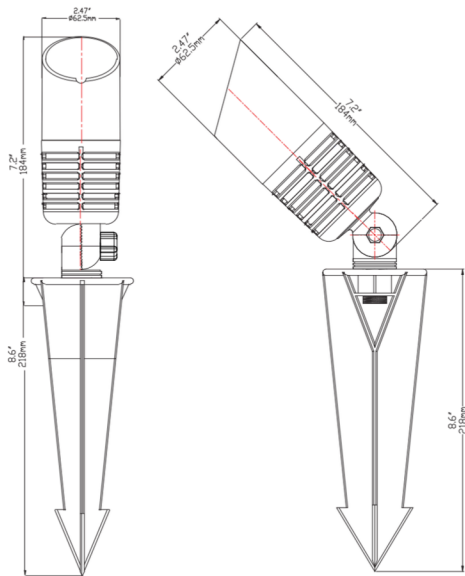

Adjustable Lumen Settings

No pins up: 730 lm (max)	3 pins up: 430 lm
1 pin up: 650 lm	4 pins up: 340 lm
2 pins up: 520 lm	All 5 pins up: 230 lm (min)