



Distributed by



EAGLE LAKE
professional landscape supply

Adjustable Pedestal Catalogue




Email - Estimating@eaglelakelandscape.com

Phone - 403-262-5600



Adjustable Pedestal

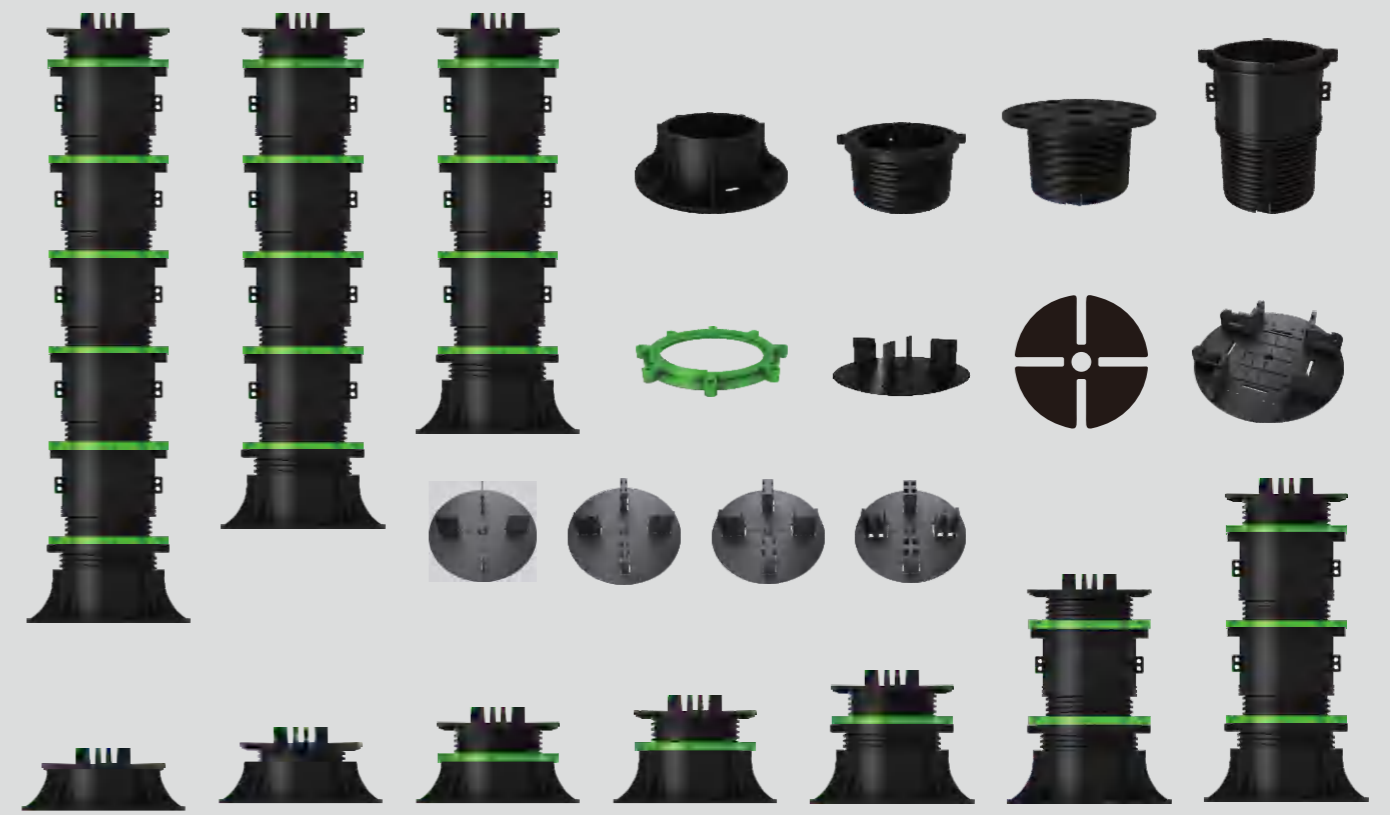

Moonbay adjustable plastic pedestal is made of PP, anti-UV, talc etc.
Support for outdoor terrace with any kind of material: timber decking, wpc decking, stone, ceramic, composite material, metal, fiberglass, grit, etc.
Can be placed on any stable substrate, also over insulation panels.



Utility



Fountain




Decking




Water feature



Tiles

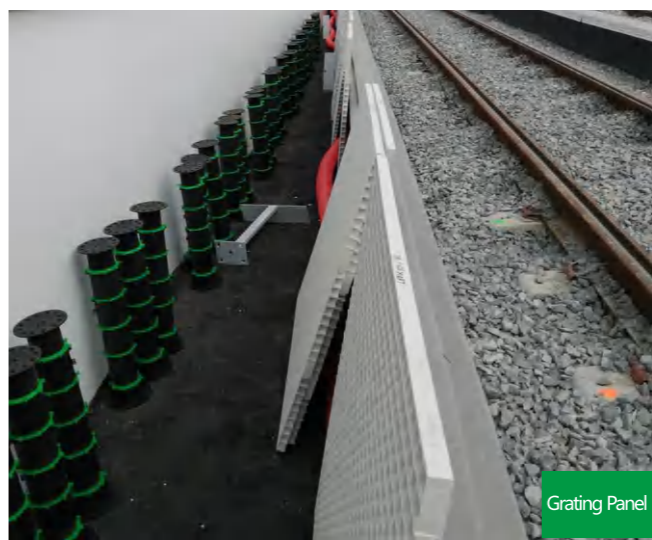

Grating Panel

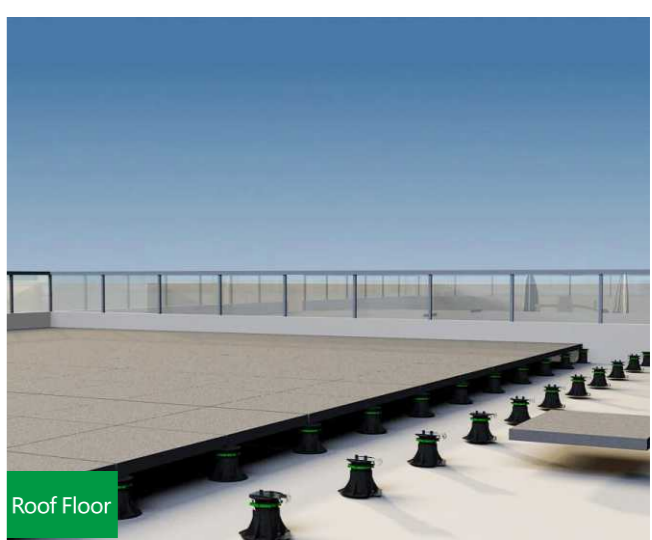

Roof Floor



Traditional



Adjustable Paving Tile Support



Traditional

Advantage



- Easy to install & light weight
- High compressive strength
- Progressive height increment
- 30 years lifetime
- Locking rings ensure rigid assembly.
- Large, soft contoured bases mitigate possible membrane damage.
- Anti-UV, and Eco-friendly
- Easily removed and re-used.

Adjustable Timber Decking Support



Joist Cradle

(40mm/50mm/60mm/80mm)
Support for any kind of substructure:
• timber batten(joists)
• composite battens
• aluminium or steel support sections
Width of the support: up to 80mm.
Fixing holes on both sides of support for mechanical fixing.




Shim

(1mm/2mm/sloped)
For use with marble, stone slabs, granite pavers, etc. for:
• added anti-slip performance
• shock and sound absorption
• compensation for stone thickness variation

Head

The head of the support is screwed directly on to the base, or on to the extender. Diameter of 150 mm, can be fitted with various components to support differing surfaces.




Spacer tabs

(2mm/3.5mm/5mm/8mm/10mm)
The head can be fitted with spacer tabs, to give the desired opening between tiles (for water drainage and ventilation).

Fix collar

Fix and lock the screws after adjustment, ensure pedestals are secured at desired heights and are easily removed when not required.




Extender

Extend and add height of adjustable pedestal
Diameter 120mm

Base

The base can be simply positioned or fixed to any substrate.

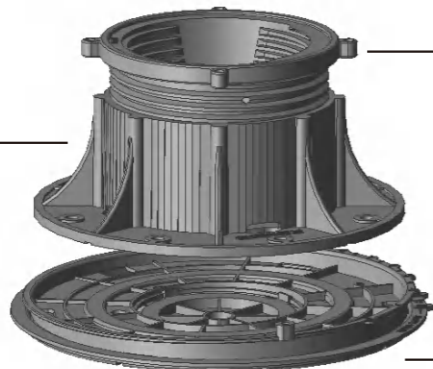

Adjustment ring

Adjustment ring
Diameter 115 mm
Screw pitch reversed
Adjust height of pedestals

Base slope corrector

Base slope corrector
Compensate slope from 0%-5%
Assembled on bottom of pedestals
Can be choose to use it or not for different installation condition



Base + Adjustment Ring



Head




Extender



Spacer Tabs
(2 / 3.5 / 5 / 8 / 10mm)



Shim
(1mm/2mm/Sloped)



15mm Extension Pad



Base slope corrector



Base rubber pads



Connecting rod



A Type B Type
Windproof system



Joist cradle
(40mm/50mm/60mm/80mm)



wood tile clip

Height Range


MB-T Type



Height Range: 14-1260mm
 Max Loading: 1200 kgs/pc
 Application: Terrace, Balcony, Rooftop, Public Square, Commercial Building, Fountain, Water Feature, Decking, Garden.
 Material: Polypropylene (PP)
 Rating: ★★★★★

Code	MB-FP-01	MB-FP-02	MB-T0	MB-T0-A	MB-T0-B	MB-T0-C	MB-T0-D
Height Range (mm)	12.5	16	14 - 19	19 - 30	28 - 42	40 - 65	60 - 105

MB-T0-E	MB-T0-F	HMB-T1-A	HMB-T2-A	HMB-T3-A	HMB-T4-A	HMB-T5-A	HMB-T6-A
90-185	185-320	250-370	370-560	500-760	600-930	750-1100	900-1260

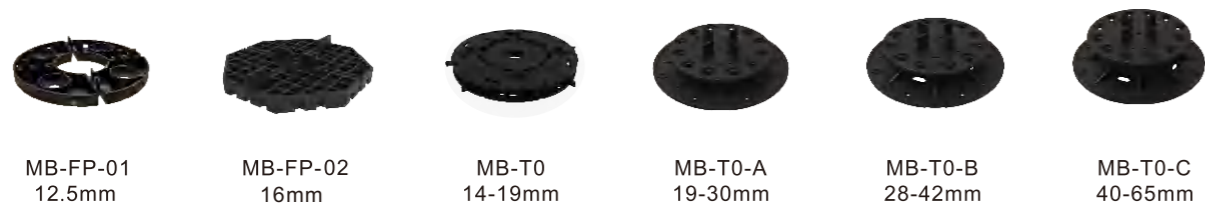

MB-FP-01 12.5mm MB-FP-02 16mm MB-T0 14-19mm MB-T0-A 19-30mm MB-T0-B 28-42mm MB-T0-C 40-65mm



MB-T0-D 60-105mm MB-T0-E 90-180mm MB-T0-F 185-320mm HMB-T1-A 250-370mm HMB-T2-A 370-560mm



HMB-T3-A 500-760mm HMB-T4-A 600-930mm HMB-T5-A 750-1100mm HMB-T6-A 900-1260mm

MB-K Type



Φ 220mm

Φ 160mm

Φ 260mm

Height Range: 210-1600mm

Max Loading: 1800 kgs/pc, heavy duty pedestal

Application: Terrace, Balcony, Rooftop, Exhibition Stage, Public Square, Commercial Building, Fountain, Water Feature, Decking, Garden.

Material: Polypropylene (PP)

Rating: ★★★★★

Code	MB-K0	MB-K1	MB-K2	MB-K3	MB-K4
Height Range (mm)	210-360	420-670	620-980	820-1290	1020-1600



MB-K0
210-360mm

MB-K1
420-670mm

MB-K2
620-980mm

MB-K3
820-1290mm

MB-K4
1020-1600mm

Prefabricated Pedestal



Φ 90mm

Φ 100mm

Height Range: 30-160mm

Max Loading: 600 kgs/pc, light pedestal system

Application: Outdoor Terrace, Indoor Raised Floor, Decking, Floor Heating, Balcony, Rooftop, Commercial Building, Garden.

Material: Polypropylene (PP)

Rating: ★★★★★

Code	MB-L0-A	MB-L0-B	MB-L0-C	MB-L0-D
Height Range (mm)	30-45	45-75	73-120	113-160



MB-L0-A
30-45mm




MB-L0-B
45-75mm




MB-L0-C
73-120mm



MB-L0-D
113-160mm

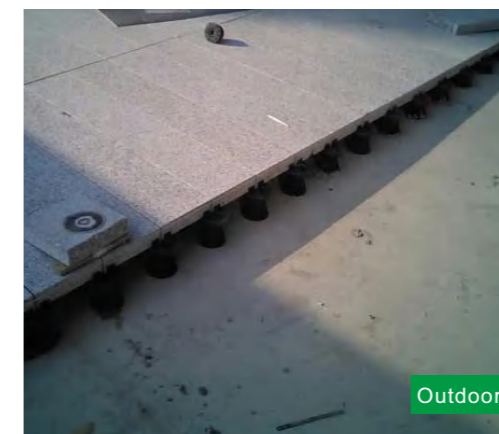


Outdoor

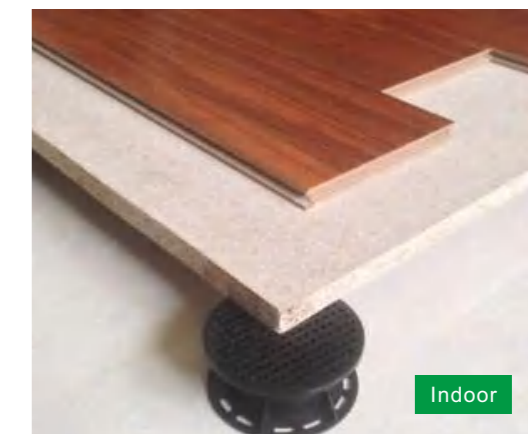

Indoor


14mm Rubber Pad+Shim

The 14mm rubber pad +shim have always been the fastest and most economical solution for fixed tiles in the elevated system

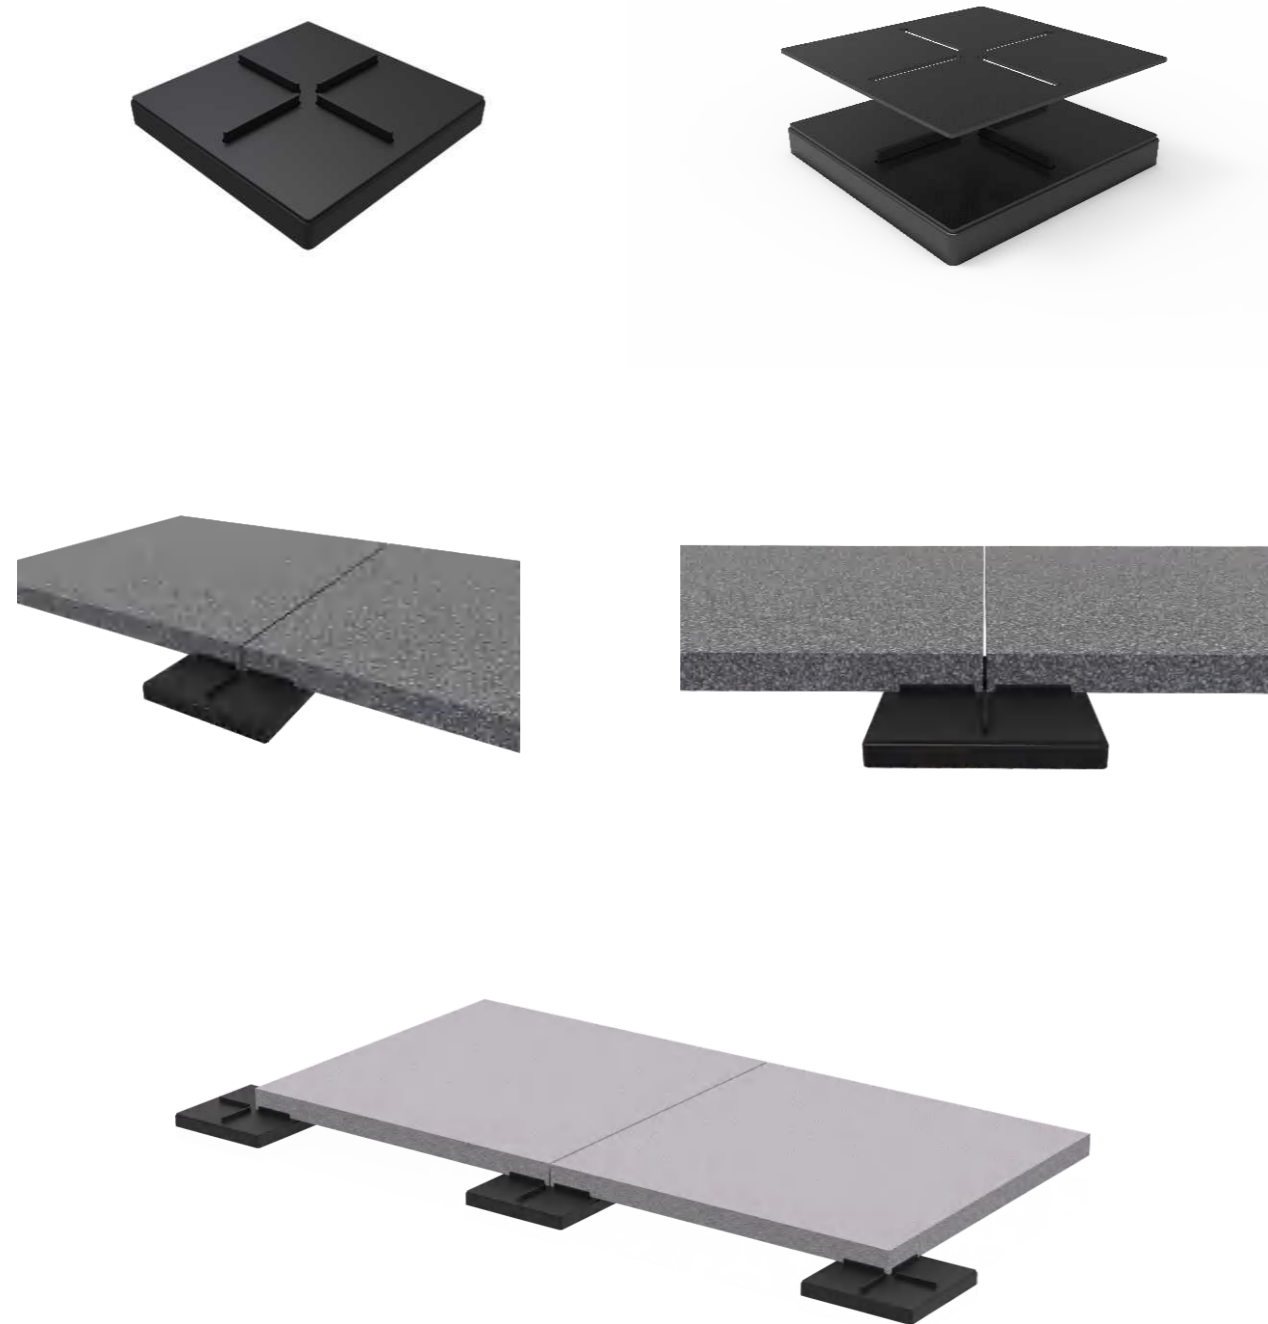


Base

Cut the base to install the pedestal on the corner

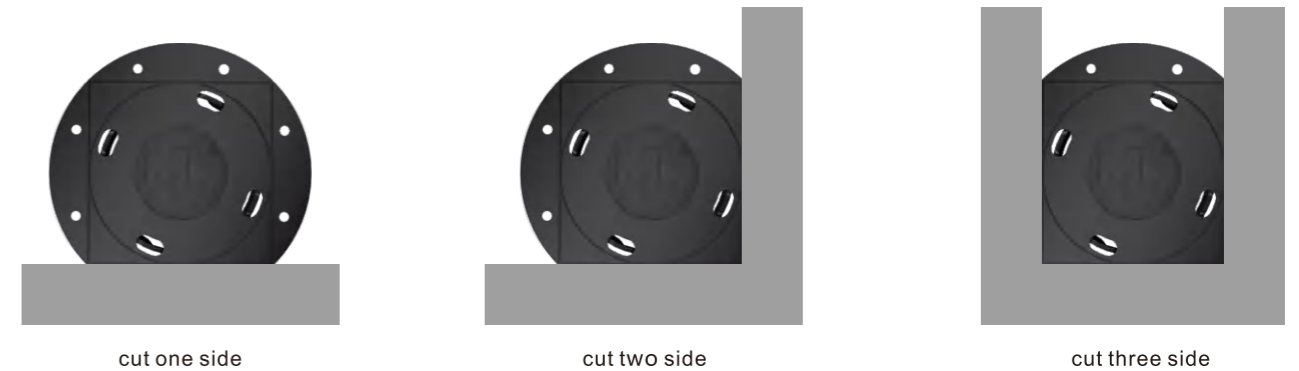

Base fix on ground

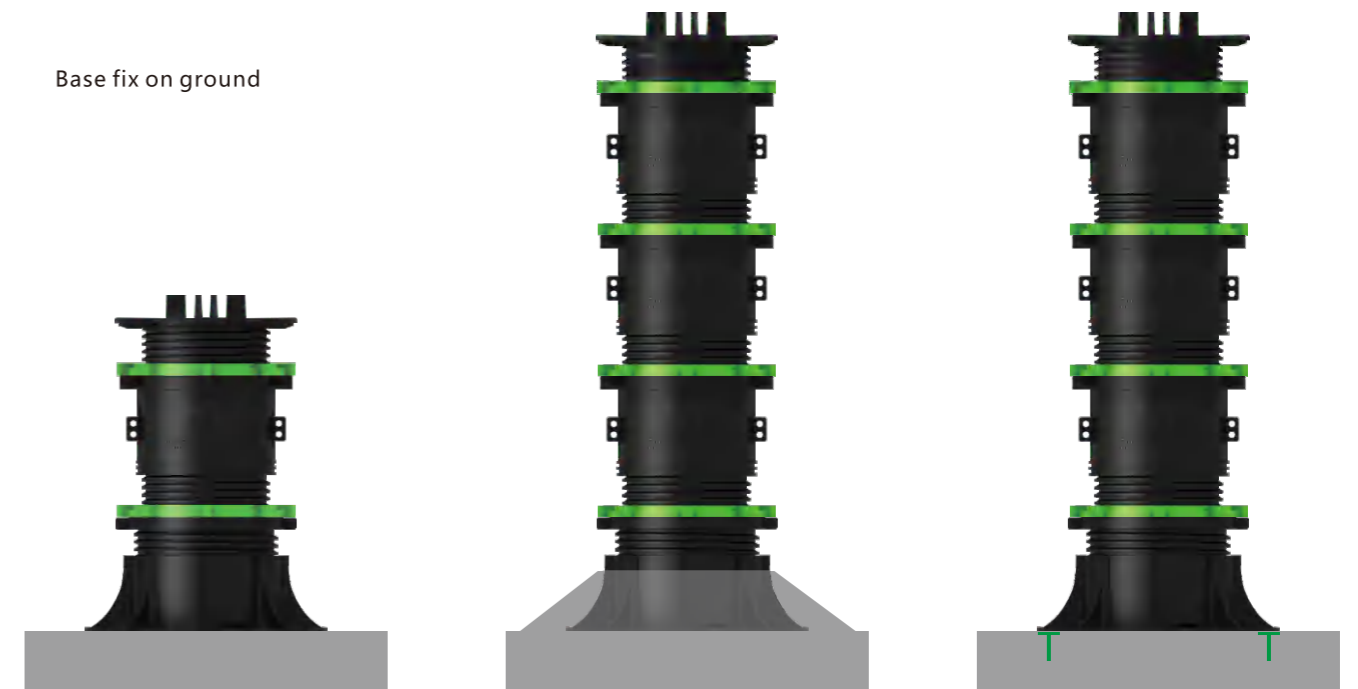

Height : ≤ 400mm

Non-fix

Height : > 400mm

Method 1: concrete or glue

Height : > 400mm

Method 2: screws(bolts)


Spacer tabs




2 mm 3.5mm 5 mm 8 mm 10 mm



One tile Two tiles Three tiles Four tiles




break off the spacer tab to fit different situation.

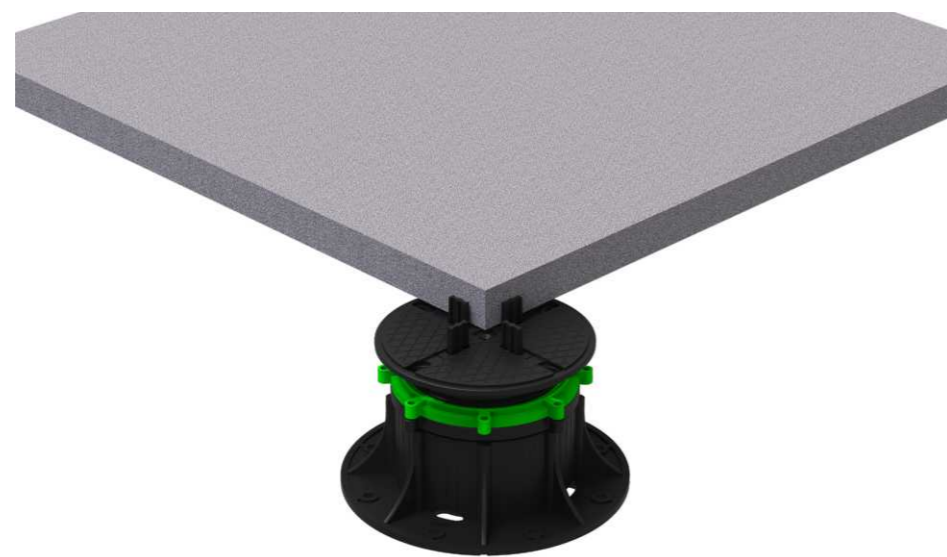

Multifunctional Spacer tabs





2 mm 3.5mm 5 mm 8 mm 10 mm

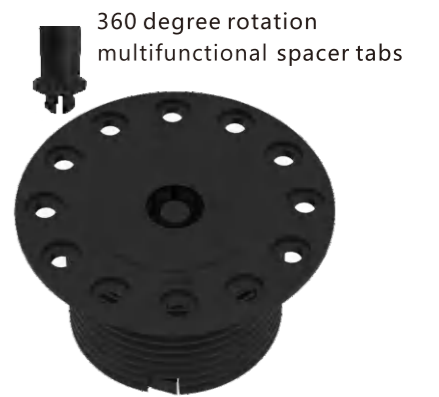



360 degree rotation multifunctional spacer tabs

Note: each green spot means one multifunctional spacer tabs

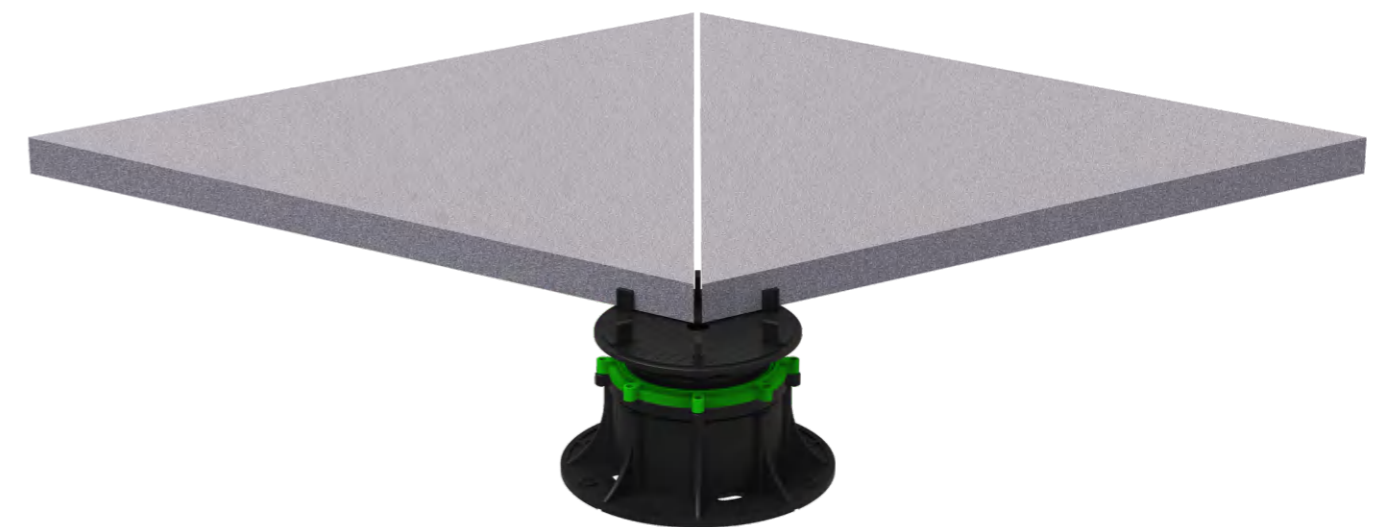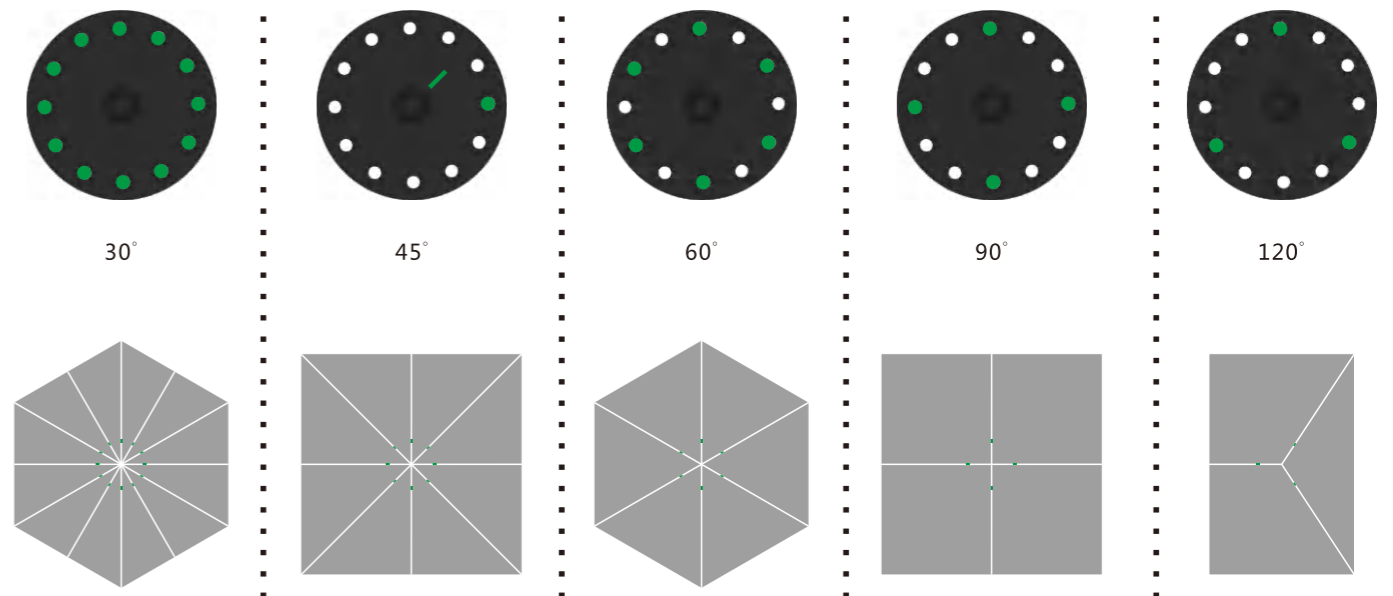

Shim Rubber

A 1mm or 2mm or sloped shim is detachable.
It anti-slip, absorb noise, and compensates for variations in paver thickness.

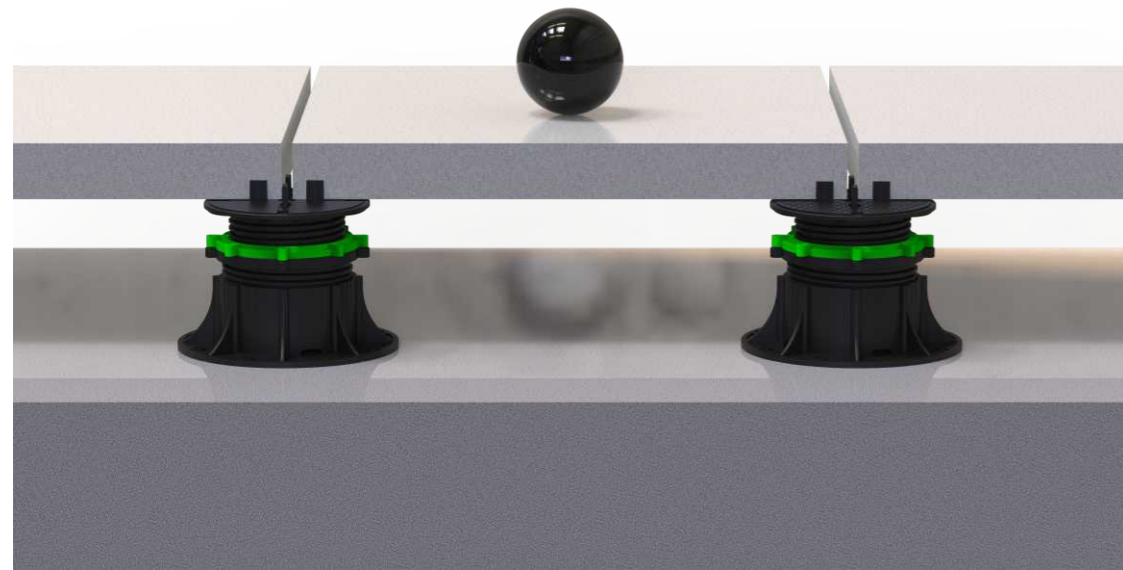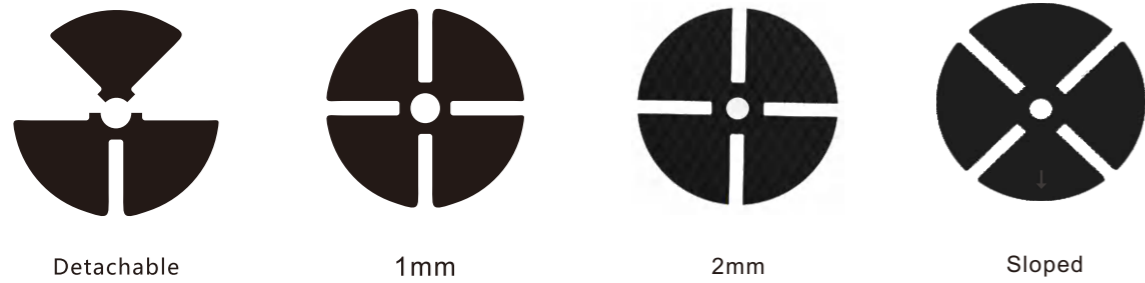


Compensate tile thickness difference

Fix collar


Fix and lock the thread, avoid sway
Color can be customized

Patent : ZL 201420565484.X

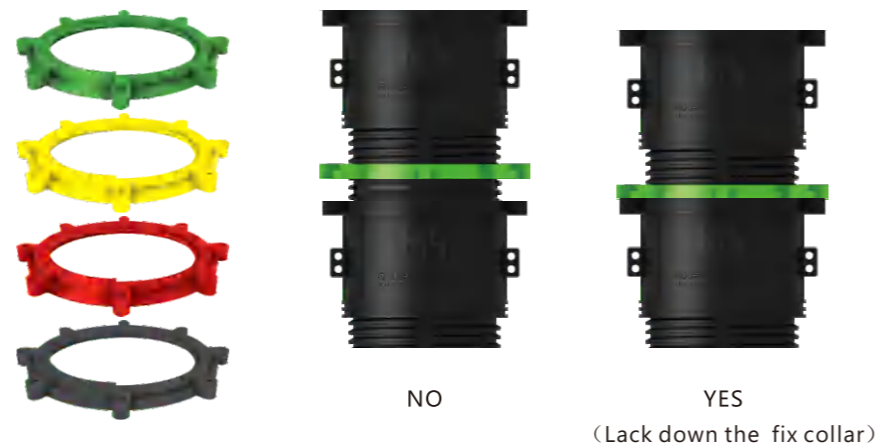

15mm extension pad

One basic pedestal+extension pads
Stackable Extension pad, this gives advantage that one size pedestal could reach more height, no need to change another size for height near project.
Fast sell and easy to stock for distributors.

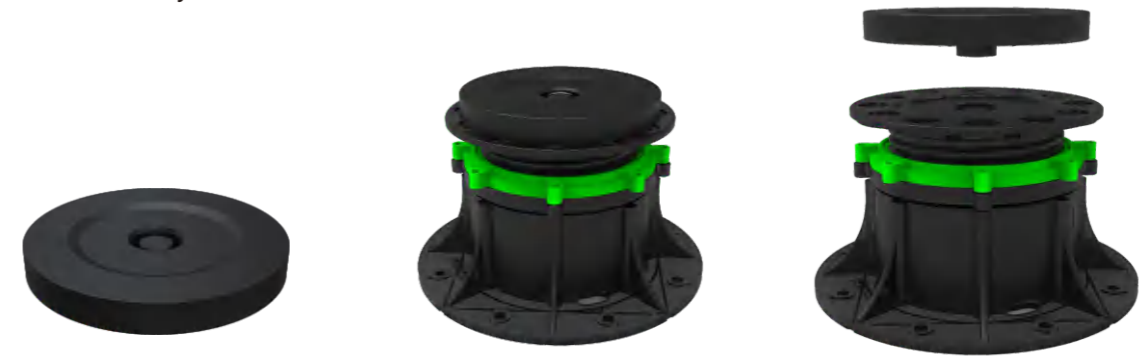


Base Slope Corrector

Rotating the upper disc to compensate 0%-5% slope
Assembled under the base of the pedestal (suitable for pedestal base dia 200mm or 220mm)



Base Rubber Pads

No smell, healthy and eco-friendly, anti-slip, reduce noise, protect water membrane
Assembled under the base of the pedestal
(suitable for pedestal base dia 200mm)

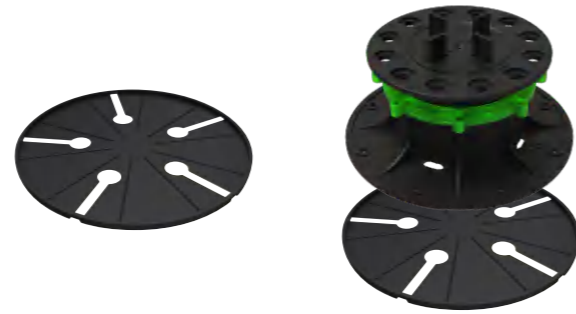

Anti-noise silent base rubber pads

 up to 25 dB

Connecting Rod

When the support reaches 800mm or more, the connecting rod makes the support more fixed. The K type is directly stuck on the K-fix collar. The T type needs to be matched with a big fix collar.



Short connecting rod
(340-500mm suitable for 480-610mm tiles)




Long connecting rod
(500-750mm suitable for 640-910mm tiles)



Big fix collar




Windproof system

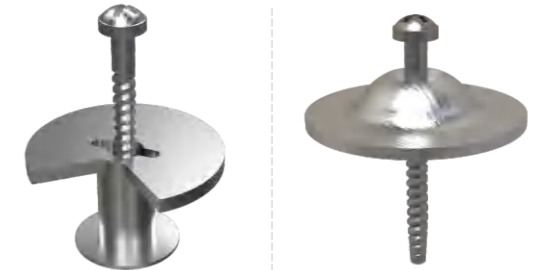

A Type

B Type

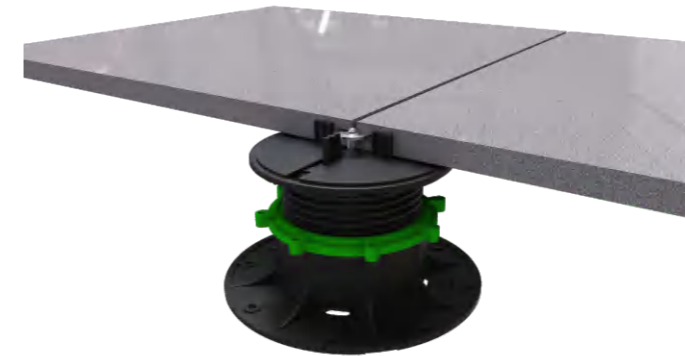


wind proof lock with screw(A Type)

Accessories are perfectly hidden by cutting the stone, being invisible. The flooring maintains its original aesthetic. But cutting the tile also extends the installation time.

wind proof lock with screw(B Type)

By firmly attaching the supports and plates to each other using circular keyholes and spike, the flooring becomes one. As a result the Pedestal System and the Paver anchor to each other to create wind resistance. This method is fast and concise, but the protruding attachment itself will cause uneven floors.

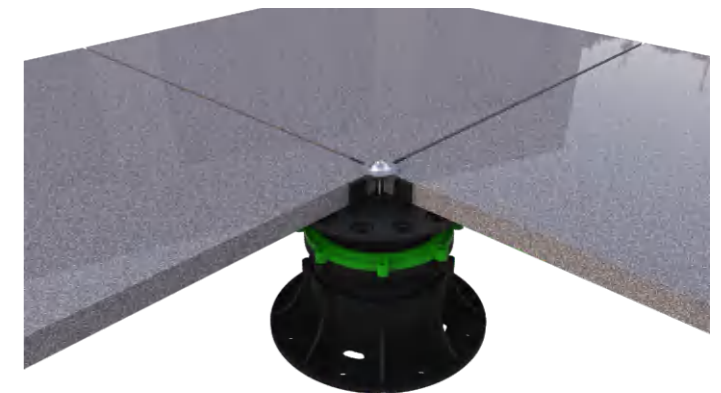

Perimeter Spacer Clips And Side Closure Steel Clips



Perimeter steel clip



Top clip for vertical closure



Bottom clip for vertical closure

Perimeter steel clip



Perimeter spacer clips is made of stainless steel, it is designed to avoid contact between the outdoor tiles and the wall. using these clips ensure a stable floor surface and a straight and elegant perimeter.

Top clip for vertical closure



Bottom clip for vertical closure

Top clip for vertical closure and bottom clip for vertical closure are used for vertical side tile closure. This system consist two types of clips, one assembled on the top of pedestal, another assembled under the base, it creates a firm seat capable of gripping the tiles which is cut to fill the gap, making perfect vertical closure for the terrace.

Self-leveling Pedestal



Self-leveling head for paving tiles
(2mm/3.5mm/5mm)



Self-leveling head for decking joist



Self Levelling pedestals provide our most flexible means of creating a floating floor system on balconies and roofdecks. The heads incorporate a gimbal mechanism which allow a rotational tilt of up to 5°. This can compensate for falls in the sub-grade, or alternatively create a slight fall on the paved surface to direct surface water to the joints.

Joist Cradle

To hold timber joist, composite joist, aluminum or steel support sections joist, wooden beam
Size option: suitable for beam size 20-80mm



single side joist cradle




40mm joist cradle




50mm joist cradle



60mm joist cradle



80mm joist cradle

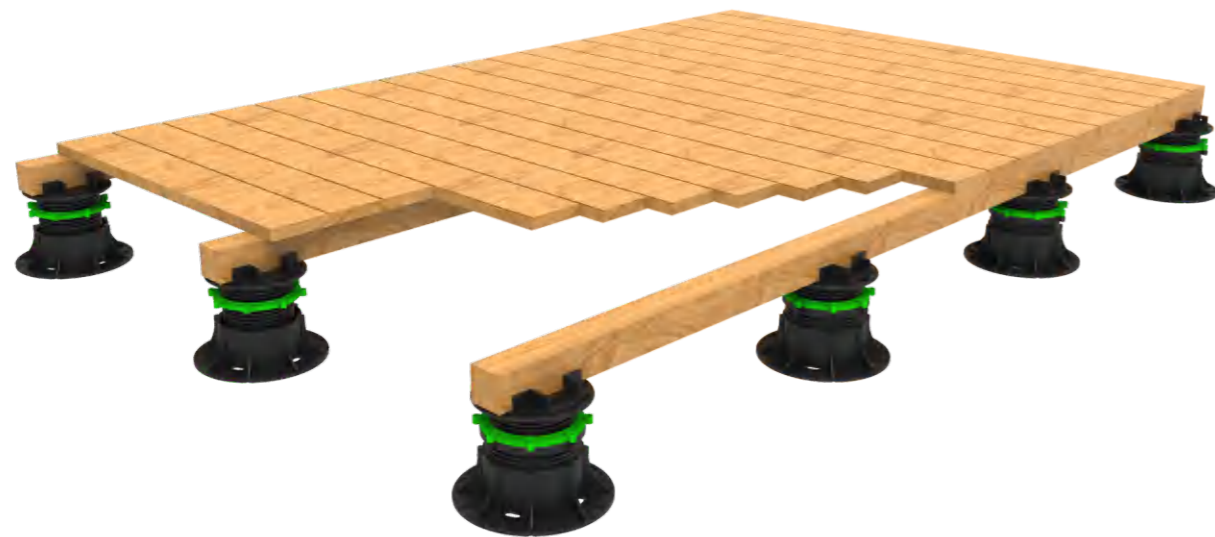


Wood Tile Clip

wood tile clip+wood tiles




Aluminium Joist And Clip For Aluminium Joist


Aluminium joist size 25x50mm, snap into a special joist cradle firmly, no need screws, can be installed with WPC decking, wood deck, it can also support ceramic tiles, stone tiles, granite tiles when installed with spacer tabs.

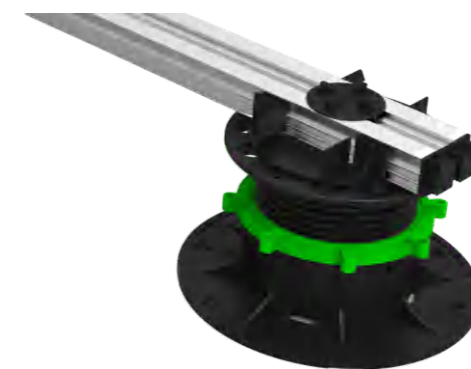

Support paving tiles

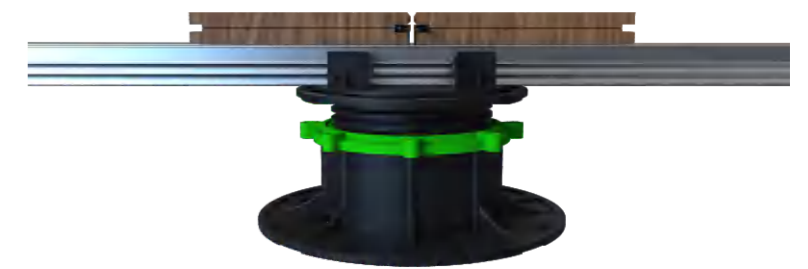

Support decking boards

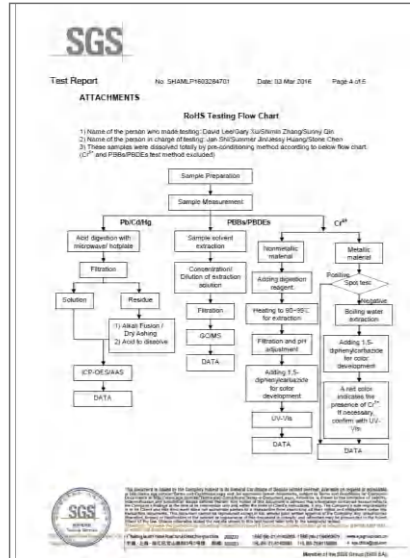


Rohs Report-SGS




CE Certificate




Astm Anti-fire Test

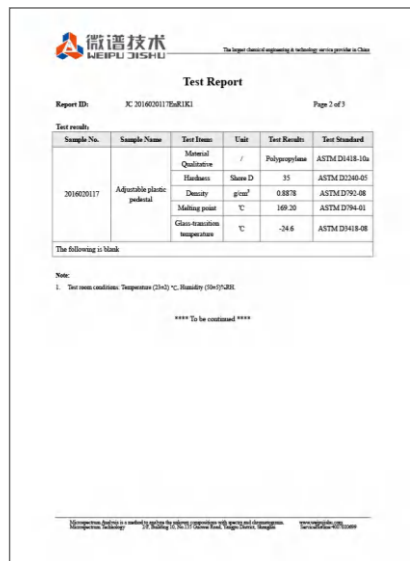

Astm Material Test

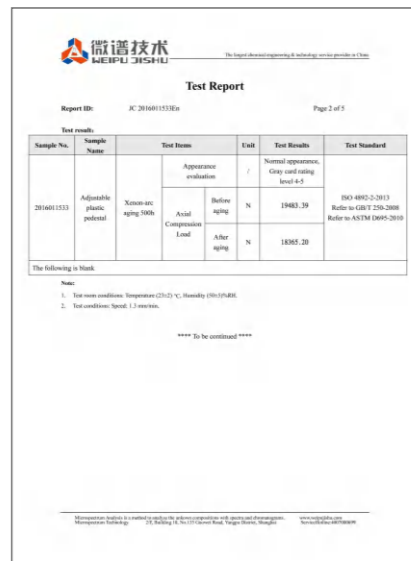

Astm Anti-uv Aging Test

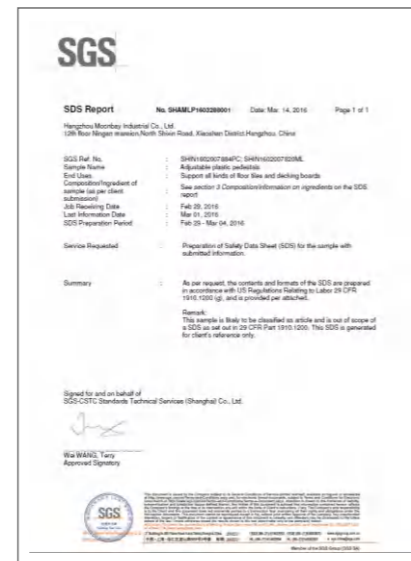

MsdS Report-SGS


Patent Protected


- ZL 201420566195.1
- ZL 201420565484.X
- ZL 201520013751.7
- ZL 201520011852.0
- ZL 201420564654.2
- ZL 201430364633.1
- ZL 201430364527.3





Guangzhou BaiTianE Hotel

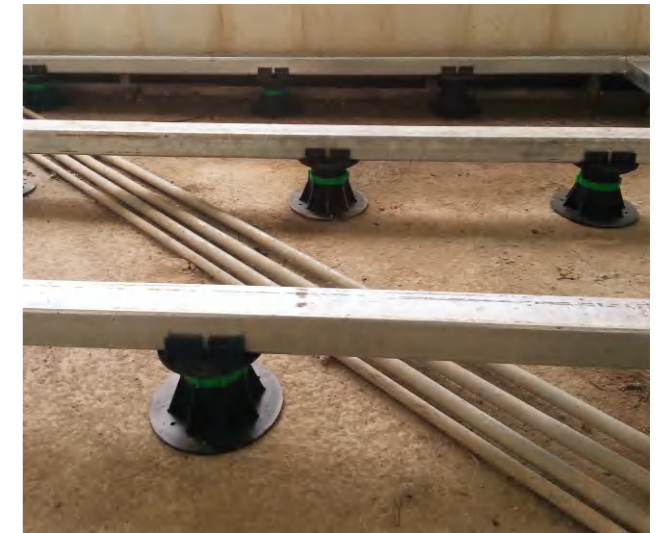

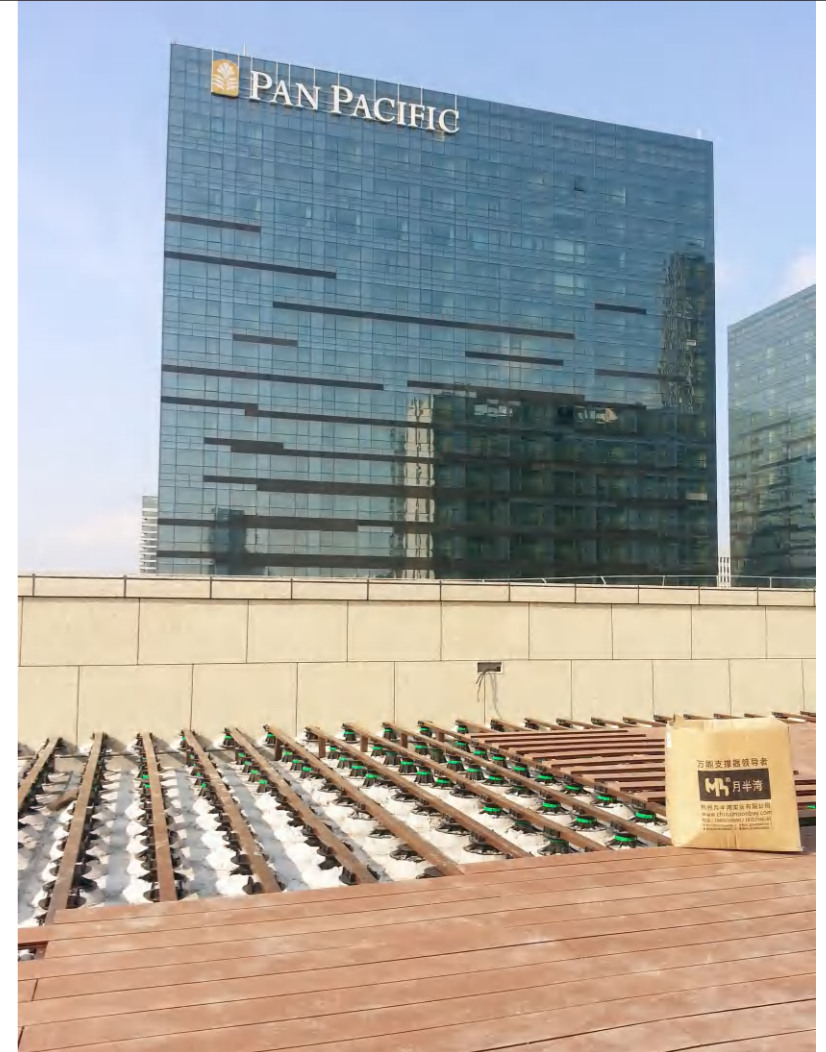

Ningbo Estern City







Oosten-New York

Consisting of 216 units and encompassing an entire block, Oosten makes a dramatic statement in South Williamsburg. The building's facade was designed in collaboration with Think Architecture.



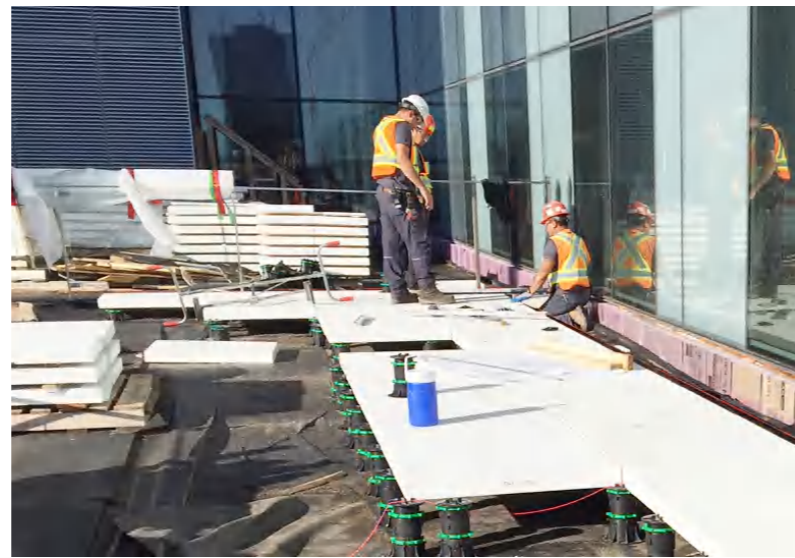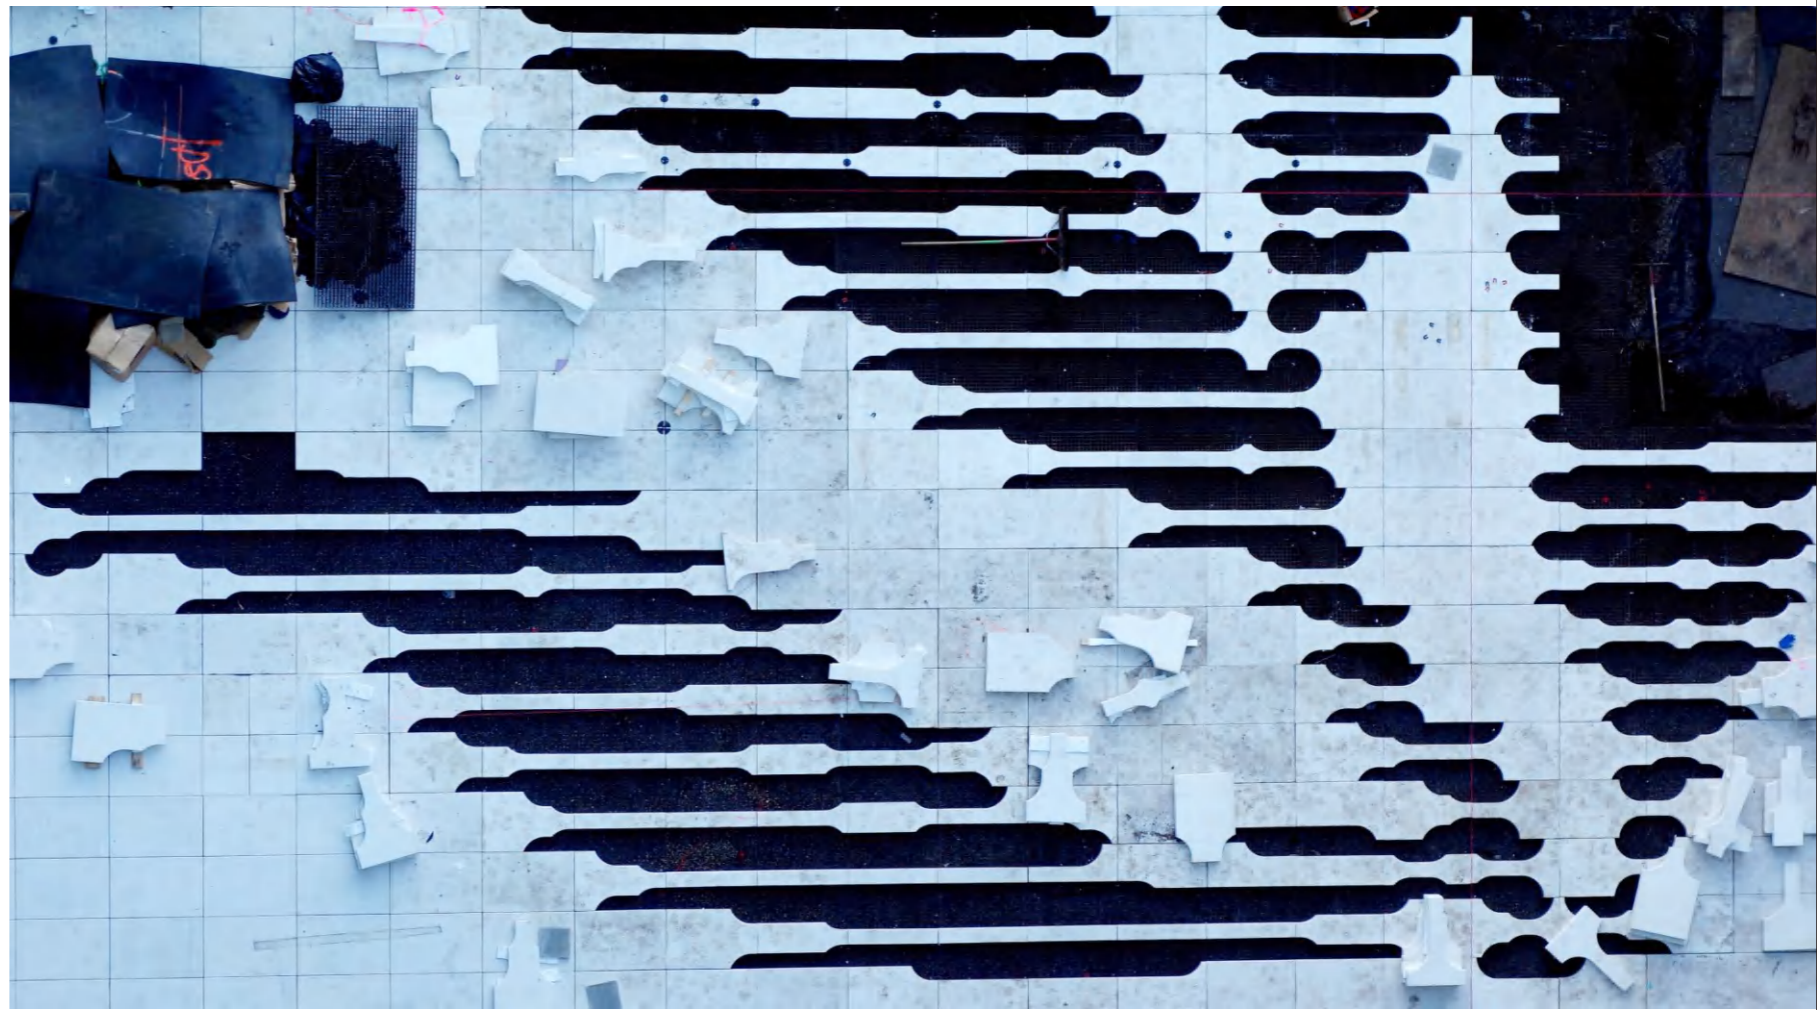

ChuM Building-Montreal



Germany Resort -Korea





Bainbridge Island Waterfront Remodel-USA






Madison Avenue Lofts-Canada





Optics Valley Center

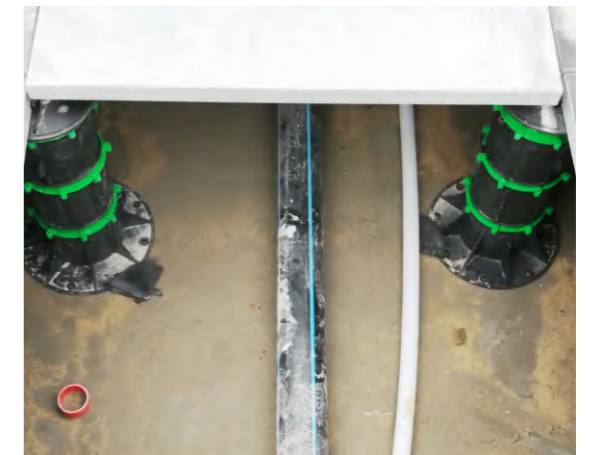



Distributed by



EAGLE LAKE
professional landscape supply

Adjustable Pedestal Catalogue




Email - Estimating@eaglelakelandscape.com

Phone - 403-262-5600



Galvanized Steel Safety Panel

The small holes on the four corners of the galvanized steel safety panel are used to connect spacer tabs of the adjustable pedestal and connect the adjustable into a whole. After placing the stone on it, when the stone breaks, it can prevent people or objects from falling and keep it safe

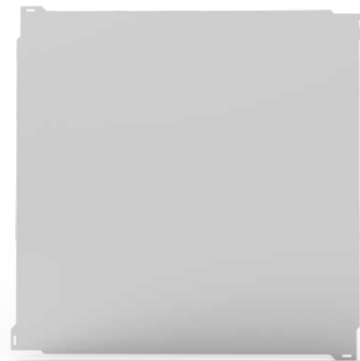

Moonbay Spike

The Moonbay spike are suitable for sandy soil areas. When the supporter is difficult to stand on the soft sand, the spike can prevent the adjustable pedestal from sinking

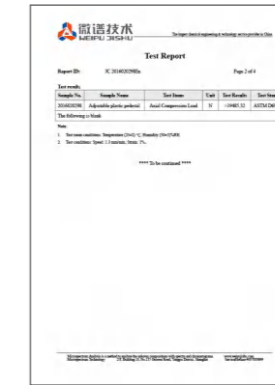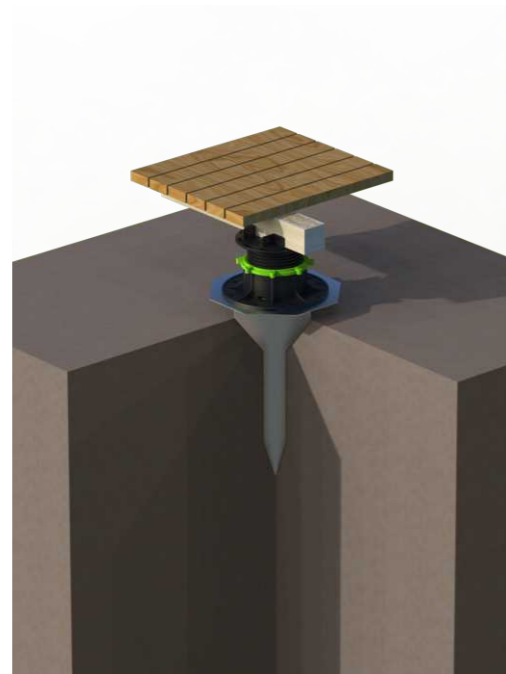

Entire



Half



Quarter

Code	Height Range (mm)	Max loading (Kg)			Breaking loading (Kg)		
		Entire	Half	Quarter	Entire	Half	Quarter
MB-FP-01	12.5	1630	1356	1195	2650	2439	1989
MB-FP-02	16	1625	1347	1189	2677	2468	1967
MB-T0	14-19	980	786	620	1350	1162	982
MB-T0-A	19-30	965	798	669	1298	1089	995
MB-T0-B	28-42	955	820	683	1250	1060	965
MB-T0-C	40-65	975	765	652	1325	1136	925
MB-T0-D	65-105	925	735	698	1386	1298	970
MB-T0-E	90-180	920	730	690	1356	1150	968
MB-T0-F	185-320	926	760	685	1365	1159	965
HMB-T1-A	250-370	915	726	650	1265	1120	925
HMB-T2-A	370-560	926	739	625	1290	1129	920
HMB-T3-A	500-760	915	725	630	1285	1090	915
HMB-T4-A	600-930	925	719	626	1129	1125	890
HMB-T5-A	750-1100	910	725	652	1025	1100	860
HMB-T6-A	900-1260	850	710	620	1260	1120	810