

Air Heaters for the Marine Market

Air Top 2000 STC and Air Top Evo 40/55



The Webasto Air Top air heaters provide continuous heating power output via stepless modulation, ensuring constant cabin temperatures. The heater operates quietly and consumes very little electrical power and fuel.

A robust composite casing protects the unit against high temperatures or salt. Moreover sealed control electronics and connectors withstand the marine environment.


There is a wide range of different air heaters:

The Air Top 2000 STC is the smallest air heater on the market. It offers excellent heat output and optimal economy. The Air Top Evo 40/55 are smart multi-mode heaters. High-performing, compact and quiet, the heaters are ideally suited for the most rigorous requirements.

Key benefits at an glance:

- Short heating-up times thanks to effective output
- Available as a complete installation kit for quick and simple retrofitting
- Dehumidification of the cabins
- Quiet-running
- Ideal for sailing and motor boats up to 40 feet
- Constant cosiness thanks to an electronic thermostat
- Low operating costs
- Meet current Marine requirements and standards
- Compact, space-saving design and simple to install

Application concept

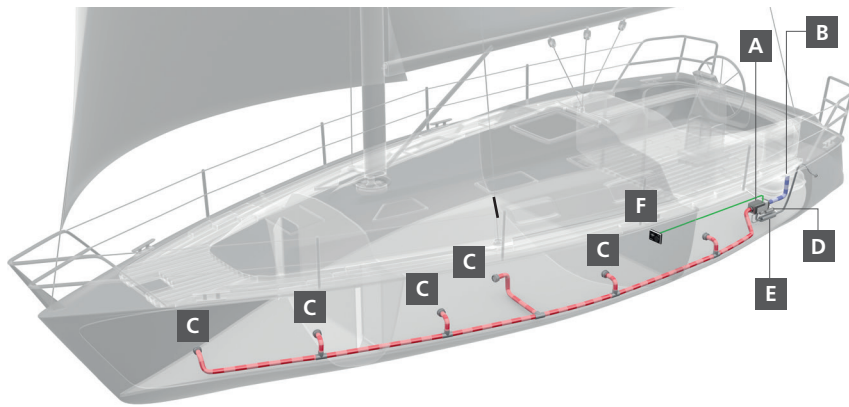

- A** Air heater
- B** Intake for fresh air from outside
- C** Outlets for even distribution of air
- D** Combustion-air intake
- E** Stainless steel exhaust
- F** Controls – simple and logical to use

Technical Specifications

Model	Air Top 2000 STC	Air Top Evo 40	Air Top Evo 55
Heat output (kW) (BTU/h)	0.9 – 2.0	1.5 – 3.5 / 4.0*	1.5 – 5.0 / 5.5**
Heat output (BTU/h)	3,000 - 7,000	5,100 - 12,000 / 13,600*	5,100 - 17,000 / 18,800**
Fuel	Diesel	Diesel	Diesel
Fuel consumption (l/h)	0.12 – 0.24	0.18 – 0.43 / 0.49*	0.18 – 0.61 / 0.67**
Rated voltage (V)	12	12, 24	12, 24
Rated power consumption (W)	14 – 29	15 – 40 / 55*	15 – 95 / 130**
Dimension L x W x H (mm)	310 x 120 x 118	423 x 148 x 162	423 x 148 x 162
Net weight (kg)	2.6	5.9	5.9

* Increased heat output ("Boost") possible for max. 6 hours.

** Increased heat output ("Boost") possible for for max. 30 minutes.

Controls



MultiControl



ThermoConnect App

The MultiControl sets new standards in terms of its modern design and user-friendliness that allows fast and intuitive operation. It includes features like an immediate start button, the ventilation function and fault code display. You can program up to three start times per day for your heater which allows the best individual comfort.

Even greater comfort with our innovative Webasto ThermoConnect App. Run your water or air heater easily with a smartphone via App for iOS and Android device.