




CRIMSON TRACE

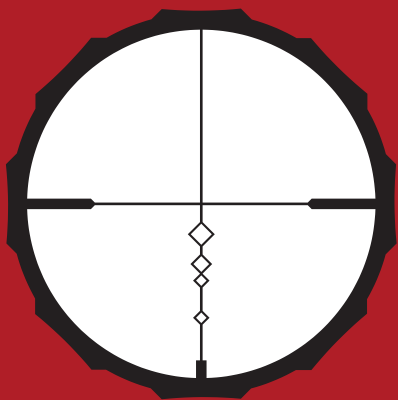

USER GUIDE



BDC PRO RETICLE

BDC PRO RETICLE

The BDC (Bullet Drop Compensation) PRO Reticle is designed to compensate for the trajectory of a specific ammunition.

Please note that the reticle is based upon ballistic information and may or may not produce these exact results based on a variety of variables such as:

- Actual Velocity (Ammunition manufacturers' information may not match the exact velocity out of your firearm. The best way to confirm velocity is to use a chronograph).
- Temperature
- Humidity
- Altitude
- Barometric Pressure
- Condition of firearm
- Scope mounting system

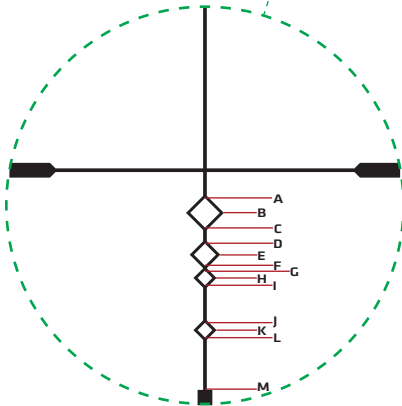

TRACE™

BALLISTIC CALCULATOR

Get precise bullet drops for your reticle and ammunition. Use our FREE Crimson Trace® Ballistic Calculator. *Available for all Crimson Trace® Reticles

Crimson Trace® Ballistic Calculator
Go to www.crimsontrace.com
for more information.

Subtensions for yardages were calculated using the following variables.
Note: all subtensions are calculated at MAX magnification.

- Caliber .308
- Muzzle Velocity (fps) 2820
- Bullet Wt (gn) 150
- Ballistic Coefficient G1 0.415
- Zero Range (yd) 100
- Temp (Fahrenheit) 59
- Altitude (feet) 2500
- Scope Height over bore (in) 1.75

SUBTENSION	YARDS	MOA
A	210	1.89"
B	250	2.89"
C	285	3.89"
D	325	4.97"
E	350	5.72"
F	375	6.47"
G	385	6.80"
H	400	7.30"
I	415	7.80"
J	485	10.33"
K	500	10.83"
L	515	11.33"
M	600	14.88"



CRIMSON TRACE[®]

CRIMSON TRACE HEADQUARTERS
9780 SW FREEMAN DRIVE, WILSONVILLE, OR 97070
TELEPHONE: 800-442-2406 • FAX: 503-783-5334
CRIMSONTRACE.COM