



LRD-1T (MIL)

#DO-2500

FOV @ 4.5x:

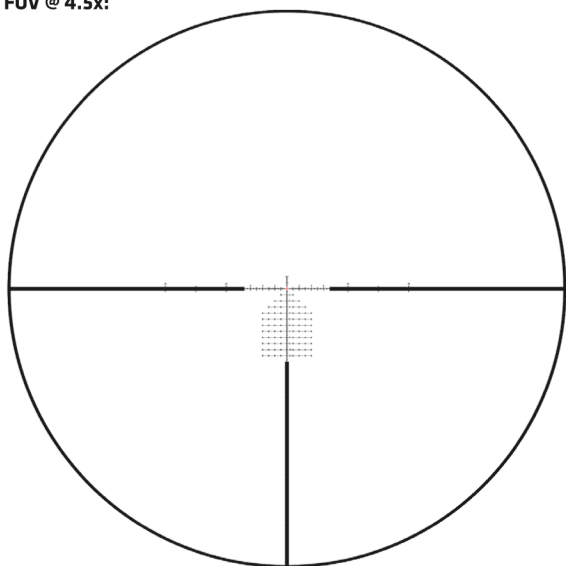

FOV @ 30x:

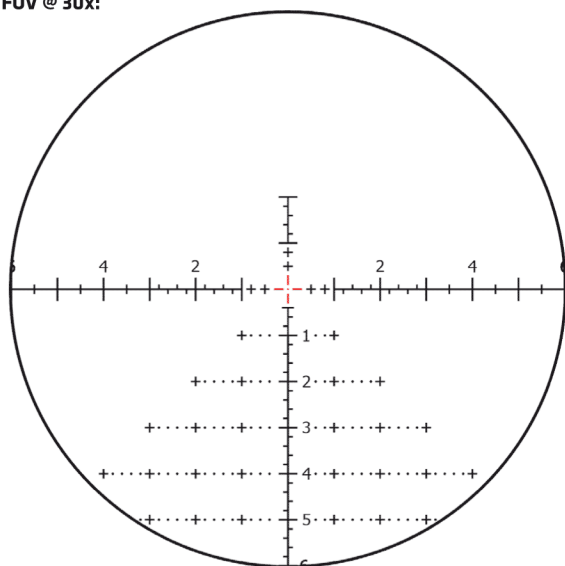

LRD-1P / LRD-1T reticles

Designed to maximize fast and effectively range determination, accurate windage corrections and moving target leads as well as fast holdovers at low magnifications. It's all in PRS and tactical solution for the ambitious shooter.

- The center of the reticle is an illuminated 0.045 Mil target point with surrounding, well lighted markings that form the cross.
- The LRD-1P / T Fast fire and ranging reticle using MRAD-based subtension lines for ranging, holdover and windage corrections.
- Extra fine line thickness (0.03mrad) inside 1.0 mrad from center, for better ranging and aiming possibilities at long ranges.
- Fast unique 0.1 mrad ranging possibility from center of the reticle, possible with accuracy down to 0.05 mrad.
- Wind corrections with 0.1 mrad accuracy from center of the reticle for the first mrad.

LRD-1T reticle

The reticle makes fast and accurate wind corrections and hold-off for moving target easy. When there is no time for dialing turrets the consistent 0.2 mrad graduations in the reticles allow for fast and accurate point of aim corrections.

