



RETICLE MANUAL


HSR-5i **MRAD RETICLE**

RAZOR® HD LHT™

VORTEX® HSR-5i MRAD RETICLE

The HSR-5i is the ideal reticle for those who want enough information to utilize personalized ballistics but prefer a clean look. A fine crosshair, coupled with MRAD-based hashmarks (.5 MRAD spacing on 15x), promotes fast and accurate shots from close to extended ranges. The HSR-5i reticle can be used to effectively determine ranges, holdovers, windage corrections, and moving target leads. Ultra-precise laser etching on the glass reticle ensures that Milliradian (MRAD) specifications can be kept to the tightest tolerances possible. The illuminated center dot on the HSR-5i reticle was carefully chosen to provide the optimum balance between precision aiming and low-light visibility.

Subtension Chart

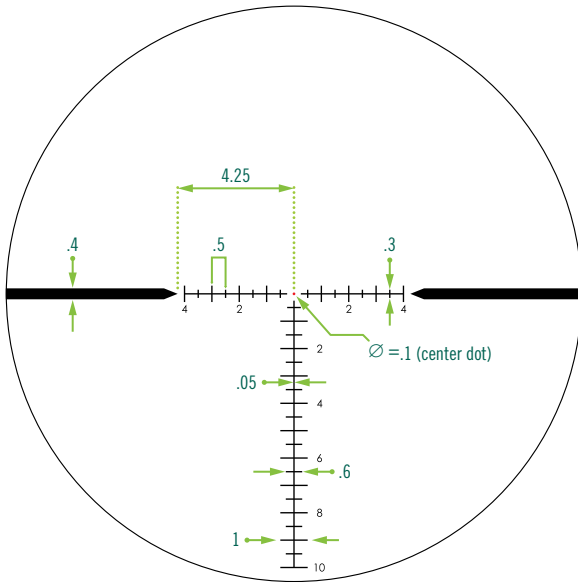

MRAD values are only correct on the highest magnification (15x).

MRAD Subtensions

The HSR-5i MRAD reticle is based on Milliradian (MRAD) subtensions. MRAD is an angular unit of measurement used to account for bullet drop, wind corrections, and range estimation. 1 MRAD will correspond to 3.6" for each 100 yards.


Second Focal Plane Reticles

In Second Focal Plane riflescopes, the listed MRAD subtensions are calibrated to a specific magnification, typically the highest. The shooter can use the center crosshair on any magnification, but when using the hashmarks for longer range shots or windage corrections, the shooter must be on the calibrated magnification (15x). If the shooter is not on the calibrated magnification, additional calculations must be done to determine the value of the hashmark.

Elevation Holdovers

Correcting for bullet drop is easy with the HSR-5i reticle's .5 MRAD hashmarks. The shooter uses the bullet drop in MRAD and holds on the corresponding hashmark.

Example

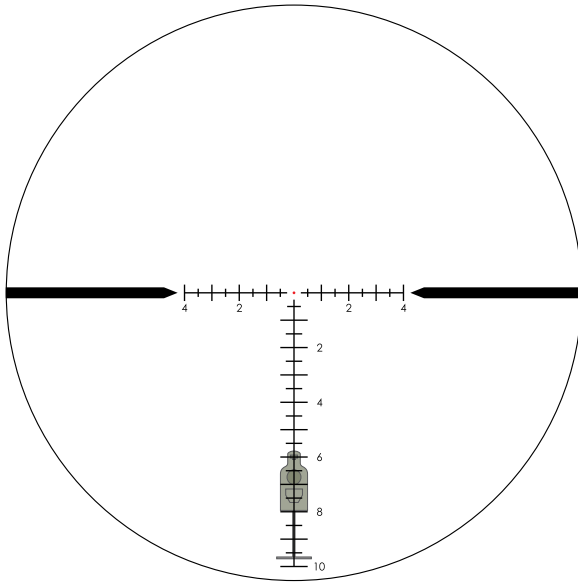

6.7 MRAD correction for 800 yd. shot. No wind.

Note: You can also use the reticle like a ruler when sighting-in and while making on-the-fly corrections. Measure the difference between the bullet's point of impact and your point of aim, and either hold on that respective hashmark, or dial in the correction on the turret, using the value of the corresponding hashmark.


Windage and Moving Targets

The HSR-5i reticle is effective when used for wind and moving target leads. Using the reticle for effective windage and moving target leads will require thorough knowledge of your weapon system's ballistics performance under varying conditions and experience in reading wind and target speed. As a bullet drops, it is important for the shooter to learn a particular weapon's windage/moving target lead corrections in MRAD rather than inches. Always hold the reticle into the wind.

Basic Windage Correction Holdovers

When dialing elevation, use the horizontal stadia for windage and moving target lead corrections.

Example

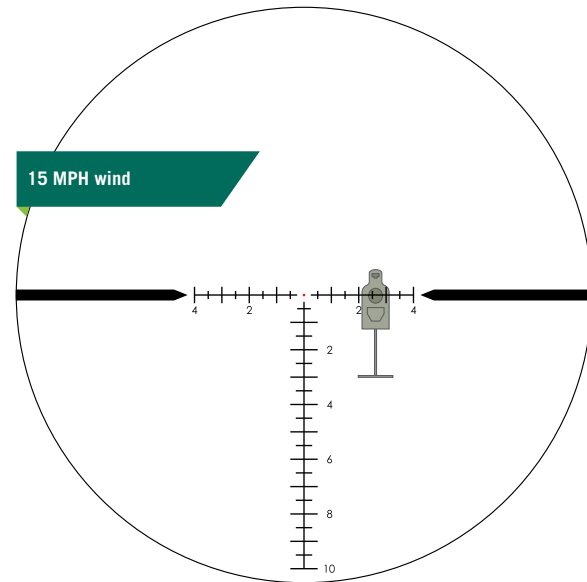


2.6 MRAD windage correction for a 15 mph crosswind.

Basic Windage and Elevation Correction Holdovers

When using the reticle for elevation correction rather than dialing, the MRAD hashmarks on the horizontal stadia line can still be used to help visually reference windage corrections. Remember to hold the reticle into the wind.

Example

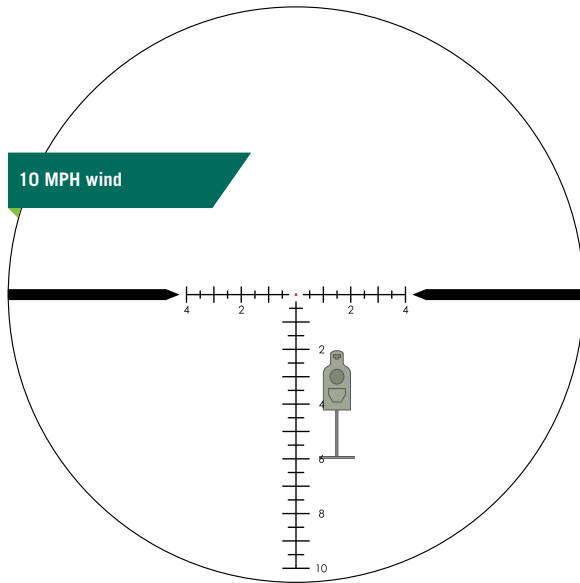


3 MRAD holdover for elevation and 1.5 MRAD windage correction for a 10 mph crosswind.

Basic Moving Target Lead Correction

When estimating moving target leads, use the MRAD marks on the horizontal stadia line. Estimating moving target leads will require knowing distance, wind speed, moving target speed, and total bullet flight time (including rifle lock time). Bullet flight times can be calculated based on its velocity in feet per second (fps). This is typically done using a ballistic calculator.

Note: Correctly estimating moving target leads is difficult and requires practice and knowledge beyond the scope of this manual.

Example

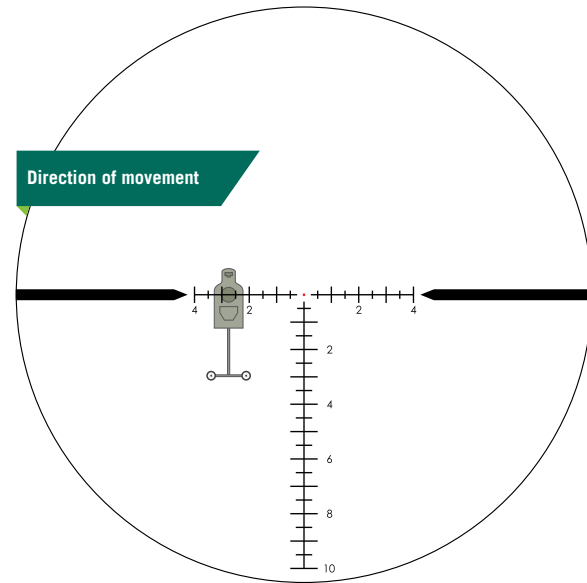

2.7 MRAD correction for a target moving 3 mph. No wind.

RANGING

MRAD measurements are effective for ranging using a simple formula. To use this formula, the shooter needs to know the size of the target or nearby object.

MRAD Ranging Formulas

$$\frac{\text{Target Size (yds.)}}{\text{Measured MRAD}} \times 1000 = \text{Range (yds.)}$$

$$\frac{\text{Target Size (inches)}}{\text{Measured MRAD}} \times 27.77 = \text{Range (yds.)}$$

$$\frac{\text{Target Size (inches)}}{\text{Measured MRAD}} \times 25.4 = \text{Range (m)}$$

$$\frac{\text{Target Size (m)}}{\text{Measured MRAD}} \times 1000 = \text{Range (m)}$$


$$\frac{\text{Target Size (cm)}}{\text{Measured MRAD}} \times 10 = \text{Range (m)}$$

To use these formulas, the shooter needs to know the size of the target or nearby object in yards, inches, meters, or cm. For the most accurate solution, use the longest dimension. If the object is taller than it is wide, it is best to use the object's height in the formula.

Using either the vertical or horizontal MRAD scale, place the reticle on a target of known dimensions and read the number of MRAD spanned. You will obtain the best results if measured to the nearest 1/10 MRAD.

Accurate measuring will depend on a very steady hold. The rifle should be firmly braced using a rest, or bipod, when measuring. Once you have an accurate MRAD reading, use the formula to calculate the distance.

Ranging Example

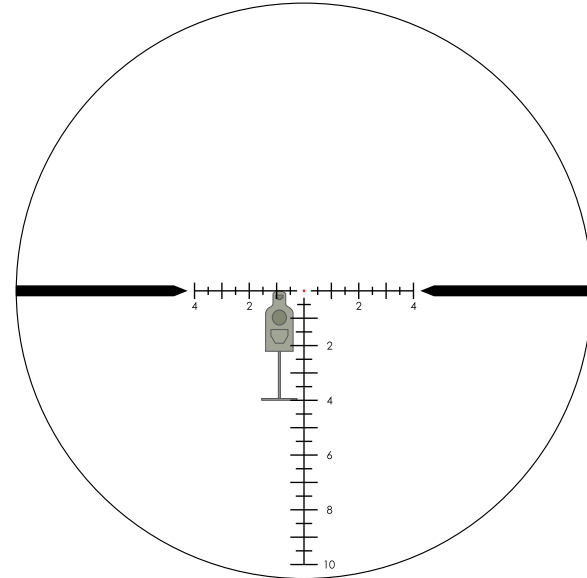

Ranging a 6' target (2 yds.) at 4 MRAD yields 500 yds.

$$\frac{2 \text{ yds.}}{4 \text{ MRAD}} \times 1000 = 500 \text{ yds.}$$



VIP WARRANTY

OUR UNCONDITIONAL PROMISE TO YOU.

We promise to repair or replace the product. Absolutely free.

- ▶ **Unlimited.**
- ▶ **Unconditional.**
- ▶ **Lifetime Warranty.**

You do not have to register, save the box, or a receipt for the Warranty to be honored.

Learn more at VortexOptics.com

service@VortexOptics.com • 1-800-4VORTEX

Note: The VIP Warranty does not cover loss, theft, deliberate damage, or cosmetic damage not affecting product performance.

For additional and latest manuals, visit VortexOptics.com



M-00265-1

© 2021 Vortex Optics

® Registered Trademark and TM Trademark of Vortex Optics. Patent Pending