



ESSENTIAL SERIES

GENERAL PURPOSE LED BULBS

KT-LED11.5PAR38-F-9XX REPLACEMENT LAMP

DESCRIPTION

11.5W PAR38 Lamp | 2700–5000K |
>90 CRI | Standard Flood



Enclosed
Fixture Rated



RoHS
Compliant

3 YEAR
WARRANTY

LAMP TYPE: PAR38
BASE TYPE: E26 (Medium)
WATTAGE: 11.5W
COLOR TEMPERATURE: 2700–5000K
COLOR RENDERING INDEX (CRI): >90
WARRANTY: 3 Years
RATED LIFE: L70 (25,000 Hours)



TYPICAL APPLICATIONS

- Track Lighting
- Display
- Flood and Spot Lighting
- Outdoor fixtures (with suitable protection from the elements)

PRODUCT FEATURES


- Energy efficient, 80%+ energy savings over legacy equivalents
- Lower heat generation than legacy equivalents
- HiCRI LED's offer enhanced color rendering vs 80 CRI LED's, providing ideal clarity, representation, and uniformity of illuminated area/objects
- PF >0.90
- Complies with Part 15 of FCC
- Title 24 JA8 compliant (excluding 5000K lamps)
- Title 20 Compliant
- Operating temperature range –4°F/–20°C to 113°F/45°C
- Long Life minimizes replacement and maintenance costs
- ANSI compliant construction ensures fitment for intended applications
- Meets Energy Star requirements
- UL Listed
- Rated for use in damp and wet locations
- Smooth, uniform dimming
- Precision crafted full face optics for precise beam angle control
- Durable Plastic housing lowers the risk for breakage
- Suitable for use in open, enclosed, and recessed fixtures

ELECTRICAL AND PERFORMANCE SPECIFICATIONS

Keystone Catalog Number	Description	Color Temp	Input Voltage	Rated Lamp Wattage	Legacy Equivalent Wattage	Base Type	Lumens	Energy Star CBCP	CRI	Light Distribution	Dimmable	Efficacy
KT-LED11.5PAR38-F-927	PAR38 bulb. Standard flood, dimmable	2700K	120V	11.5W	90W halogen	E26	1000	2230	>90	40°	Yes	87 lm/W
KT-LED11.5PAR38-F-930	PAR38 bulb. Standard flood, dimmable	3000K	120V	11.5W	90W halogen	E26	1000	2370	>90	40°	Yes	87 lm/W
KT-LED11.5PAR38-F-940	PAR38 bulb. Standard flood, dimmable	4000K	120V	11.5W	90W halogen	E26	1050	2605	>90	40°	Yes	91 lm/W
KT-LED11.5PAR38-F-950	PAR38 bulb. Standard flood, dimmable	5000K	120V	11.5W	90W halogen	E26	1050	2618	>90	40°	Yes	91 lm/W

KT-LED11.5PAR38-F-9XX REPLACEMENT LAMP

PHYSICAL CHARACTERISTICS

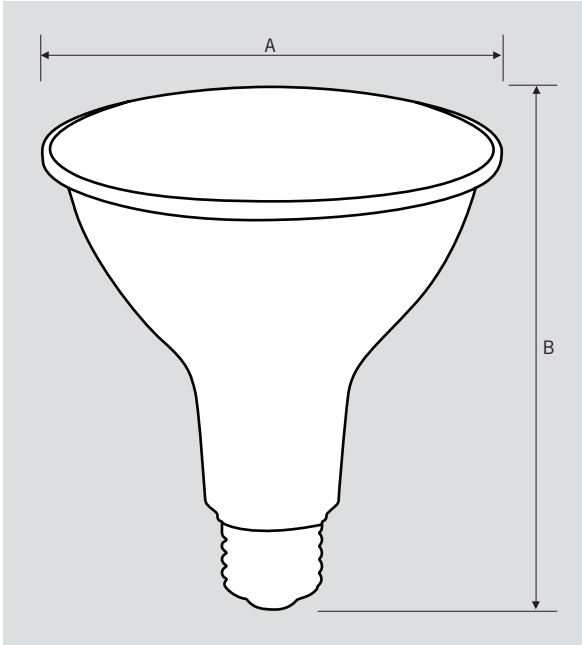

LAMP DIMENSIONS

A (Diameter)	4.80"
B (Length)	5.20"

BASE TYPE: E26 (Medium)

PACKAGING

Carton Quantity	24 pcs
Carton Dimensions	21.06" × 15.75" × 13.58"
Carton Weight	18.1 lbs

ORDERING INFORMATION

ORDER CODE	CARTON QUANTITY	ENERGY STAR UNIQUE ID	EASY CODE	UPC
KT-LED11.5PAR38-F-927	24 pcs	2348795	ZGB-87	843654123905
KT-LED11.5PAR38-F-930	24 pcs	2348796	OKM-05	843654123912
KT-LED11.5PAR38-F-940	24 pcs	2348797	ODN-62	843654123929
KT-LED11.5PAR38-F-950	24 pcs	2348798	LLB-18	843654123936

CATALOG NUMBER BREAKDOWN

KT-LED11.5PAR38-F-9XX

1 2 3 4 5 6 7

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Shape
- 5 Standard Flood
- 6 900 Series
- 7 Color Temperature