



# KT-VTLED63-4A-8XX-VDIM-P

## VAPOR TIGHT FIXTURE

### DESCRIPTION

4' 63W LED Vapor Tight Fixture | 120-277V Input | 0-10V Dimming | Premium Series

### APPLICATION

Used for commercial and industrial rugged or outdoor applications



**10 YEAR**  
LIMITED WARRANTY



### PRODUCT FEATURES


- Traditional design, narrow body, Vapor Tight fixture, suitable for rugged, demanding applications
- Powered by Keystone 120-277V, 0-10V dimming LED driver, 10% minimum
- Smooth, diffused, impact resistant polycarbonate lens provides even lit appearance
- Stainless steel, tamper resistant lens clips (screws not included)
- Includes mounting hardware, cordgrip, and hole plug for out-of-the-box installation
- Compatible with Keystone motion and occupancy sensors, featuring high-end trim and daylight sensing.
- Compatible with Keystone SmartSafe emergency backups, max of 30°C ambient operating temperature with emergency pack installed
- NEMA 4X rated enclosure
- IP66 Ingress Protection
- IK10 Impact Rating
- Ambient operating temperature: -40°C/-40°F to 50°C/122°F
- LED chip lifetime: L70 >100,000 hours @ 25°C/77°F ambient fixture temperature
- PF: > 0.95
- THD: < 20%
- UL Certified for Wet Locations
- ETL Sanitation Listed NSF/ANSI Standard 2 - Food Equipment, Splash Zone (Not for Direct Food Zone)
- DesignLights Consortium® (DLC) qualified product. Not all product variations listed on this page are DLC premium. Visit <https://qpl.designlights.com> to confirm if the product meets the DLC Standard or Premium designation

### PRODUCT SPECIFICATIONS

Catalog Number	Color Temperature	Nominal Length	Input Voltage	Wattage	CRI	Lumen Output	Efficacy
KT-VTLED63-4A-840-VDIM-P	4000K	4 ft.	120-277V	63W	> 82.0	8,065	128 lm/W
KT-VTLED63-4A-850-VDIM-P	5000K	4 ft.	120-277V	63W	> 82.0	8,190	130 lm/W

### PHOTOMETRIC SPECIFICATIONS

#### LUMINOUS INTENSITY DISTRIBUTION

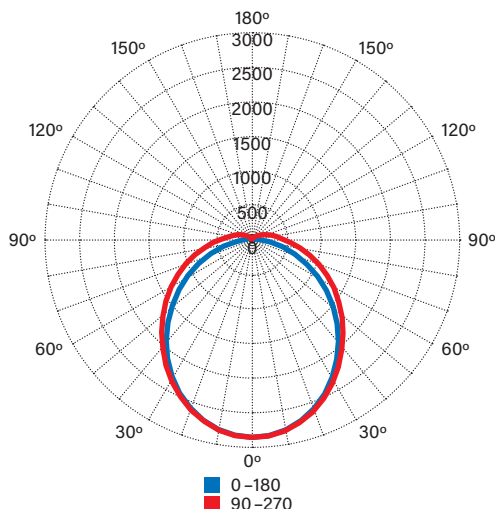

#### ZONAL LUMEN SUMMARY

Degree	Flux (Lumens)	% Luminaire	Degree	Flux (Lumens)	% Luminaire
0~10°	270.3 lm	3.21%	0~100°	8,248.9 lm	97.82%
0~20°	1,037.7 lm	12.31%	0~110°	8,346.6 lm	98.98%
0~30°	2,178.8 lm	25.84%	0~120°	8,392.6 lm	99.52%
0~40°	3,518.0 lm	41.72%	0~130°	8,410.7 lm	99.74%
0~50°	4,873.3 lm	57.79%	0~140°	8,418.0 lm	99.82%
0~60°	6,090.8 lm	72.23%	0~150°	8,423.7 lm	99.89%
0~70°	7,058.0 lm	83.69%	0~160°	8,428.5 lm	99.95%
0~80°	7,710.7 lm	91.43%	0~170°	8,431.9 lm	99.99%
0~90°	8,065.8 lm	95.65%	0~180°	8,433.0 lm	100.00%



# KT-VTLED63-4A-8XX-VDIM-P

## VAPOR TIGHT FIXTURE

### ACCESSORIES

#### SENSORS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/MW3	KTS-MW3-UV-KO-K2	Microwave Multifunction Occupancy/Daylight Sensor Kit, Includes 120-277V input to 12V DC convertor, IP65 12V input sensor head, nomex sleeve, extension neck	843654134352	TBV-76




\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

#### CORD SETS

Factory-Installable OR Field-Installable (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/515P6	KT-CS-515P-6-18/3	Cord set for high bay; 125V NEMA 5-15P; straight blade plug; 6' SJTOW cable; 18/3 wire	843654140124	UKH-26
	/L715P10	KT-CS-L715P-10-16/3	Cord set for high bays; 277V NEMA L7-15P; twist lock plug; 10' SJTOW cable; 16/3 wire	843654140131	SFV-88
	/L615P10	KT-CS-L615P-10-16/3	Cord set for high bays; 250V NEMA L6-15P; twist lock plug; 10' SJTOW cable; 16/3 wire	843654140148	ZQS-05
	/L515P10	KT-CS-L515P-10-16/3	Cord set for high bays; 125V NEMA L5-15P; twist lock plug; 10' SJTOW cable; 16/3 wire	843654140155	GVH-22
	/L715P6	KT-CS-L715P-6-16/3	Cord set for high bays; 277V NEMA L7-15P; twist lock plug; 6' SJTOW cable; 16/3 wire	843654140162	DVU-44
	/L615P6	KT-CS-L615P-6-16/3	Cord set for high bays; 250V NEMA L6-15P; twist lock plug; 6' SJTOW cable; 16/3 wire	843654140179	LCW-66
	/L515P6	KT-CS-L515P-6-16/3	Cord set for high bays; 125V NEMA L5-15P; twist lock plug; 6' SJTOW cable; 16/3 wire	843654140186	POC-82
	/NP10	KT-CS-NP-10-16/3	Cord for high bays; no plug; inners 1/2" strip on both ends; 10' SJTOW cable; 16/3 wire	843654140193	YOH-90
	/NP6	KT-CS-NP-6-16/3	Cord for high bays; no plug; inners 1/2" strip on both ends; 6' SJTOW cable; 16/3 wire	843654140216	HUB-73
	/NP15	KT-CS-NP-15-16/3	Cord for high bays; no plug; inners 1/2" strip on both ends; 15' SJTOW cable; 16/3 wire	843654140209	EYD-18



\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).  
**Note:** For cord sets not listed here, please contact your Keystone sales rep.

(Accessories continued on next page)



# KT-VTLED63-4A-8XX-VDIM-P

## VAPOR TIGHT FIXTURE

**ACCESSORIES** (continued)

**EMERGENCY BACKUP**

**Factory-Installable OR Field-Installable** (field-installable purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	/EM5	KT-EMRG-LED-5C-500	5W, 500 lumen Smart Safe emergency backup	843654103099	JTR-48



\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).  
 † Factory installation of emergency backup units will automatically include any relevant mounting bracket.

**MOUNTS AND BRACKETS**

**Field-Installable / Field-Use ONLY** (purchased separately)

CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
KT-VTLED-45SM-1-KIT	45° steel surface mount kit for all Keystone vapor tight fixtures	843654123455	JDN-49
KT-VTLED-TPSCREW-KIT	Screws for tamper-proofing vapor tight fixtures. Includes 14 screws	NA	NA




(Accessories continued on next page)



# KT-VTLED63-4A-8XX-VDIM-P

## VAPOR TIGHT FIXTURE

### PHYSICAL SPECIFICATIONS

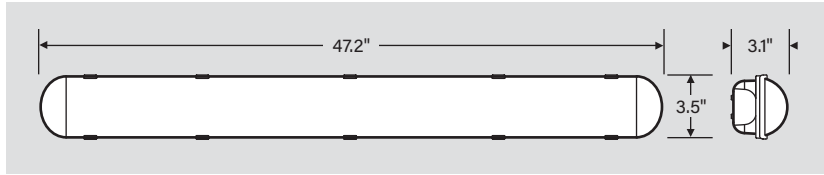

### ORDERING INFORMATION

CATALOG NUMBER	PACK QUANTITY	UPC	EASY CODE	DLC PRODUCT ID
KT-VTLED63-4A-840-VDIM-P-CP	4	843654122199	XER-85	PASFJXE8
				POHVF1NK
				PTGKBZUJ
KT-VTLED63-4A-850-VDIM-P-CP	4	843654122205	APZ-37	P63W2JLL
				PM9LUXGK
				P4ZXBEYU

### CATALOG NUMBER BREAKDOWN

# KT-VTLED63-4A-8XX-VDIM-P

<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>
<b>1</b> Keystone Technologies	<b>2</b> Vapor Tight LED Fixture	<b>3</b> Wattage	<b>4</b> 4' Nominal Length	<b>5</b> Lamp Type	<b>6</b> 80 CRI	<b>7</b> Color Temperature	<b>8</b> 0-10V Dimming	<b>9</b> Premium Series	<b>10</b> Sensor Options

	No Option
/MW3	Microwave Sensor Included

### ORDERING EXAMPLES

FIXTURE WITH MULTIPLE FACTORY-INSTALLED ACCESSORIES\*

**KT-VTLED63-4A-8XX-VDIM-P/MW3/NP10/EM5**

FIXTURE WITH MULTIPLE FACTORY-INSTALLED ACCESSORIES\*

**KT-VTLED63-4A-8XX-VDIM-P/MW3/EM5**

FIXTURE WITH TWO FACTORY-INSTALLED ACCESSORIES\*

**KT-VTLED63-4A-8XX-VDIM-P/MW3/NP10**

FIXTURE WITH SINGLE FACTORY-INSTALLED ACCESSORY

**KT-VTLED63-4A-8XX-VDIM-P/MW3**

FIXTURE WITH NO FACTORY-INSTALLED ACCESSORIES

**KT-VTLED63-4A-8XX-VDIM-P**

#### KEYSTONE FIXTURE

CATALOG NUMBER
KT-VTLED63-4A-8XX-VDIM-P

#### SENSORS

✓	SUFFIX	CATALOG NUMBER
✓	/MW3	KTS-MW3-UV-KO-K2

#### CORD SETS

✓	SUFFIX	CATALOG NUMBER
✓	/NP10	KT-CS-NP-10-16/3

#### EMERGENCY BACKUP

✓	SUFFIX	CATALOG NUMBER
✓	/EM5	KT-EMRG-LED-5C-500

\* When ordering more than one factory-installed accessory, use multiple suffixes as shown in the ordering examples above.  
 Note: All accessories can also be ordered separately for field installation using just their regular Catalog Number, UPC, or Easy Code.