



39 Watt Ceramic Lamp

38807 DATA SHEET



UNI-FORM
PULSE START METAL HALIDE LIGHTING SYSTEMS

SUPER PULSE START
Ceramic (SPC)
Ceramic Metal Halide



Dia. = 0.6" (15mm)
MOL = 3.3" (85mm)
LCL = 2.0" (51mm)
Base = G8.5

(800) 451-2606
or (440) 248-3510
Fax: (800) 451-2605
7905 Cochran Road
Glenwillow, Ohio 44139 USA
E-mail: venture@adlt.com
VentureLighting.com

MHC 39W/U/T4/UVS/PS/930

GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	C130/E
Bulb Shape	T4
Base Type	G8.5
Bulb Finish	Clear
Rated Life	15000 hours
Operating Position	Universal
Dimming	N/A

PHOTOMETRIC

Initial Lumens	4000
Scotopic Lumens (S/P 1.4)	5600
Lumens Per Watt	103
Lamp Lumen Depreciation (LLD)	.87 (87%) @ 6000 hours
Correlated Color Temperature	3000K
Chromaticity Coordinates (CIE-x,y)	.435 .400
Color Rendering Index (CRI)	90

PHYSICAL

Bulb Diameter	0.6" (15mm)
Max. Overall Length (MOL)	3.3" (85mm)
Light Center Length (LCL)	2.0" (51mm)
Effective Arc Length	4.0mm
Max. Base Temperature (°C)	300
Max. Bulb Temperature (°C)	500
Socket Pulse Rating (KV)	-
Luminaire Type	Enclosed Rated

ELECTRICAL



Lamp Watts	39
Lamp Oper. Voltage (Nom.)	85

SUSTAINABILITY

Recycling Program Smartpac® 800-451-2606

NOTES

Lamp performance ratings published in this data sheet are based on operation with approved electronic ballasts. To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio.

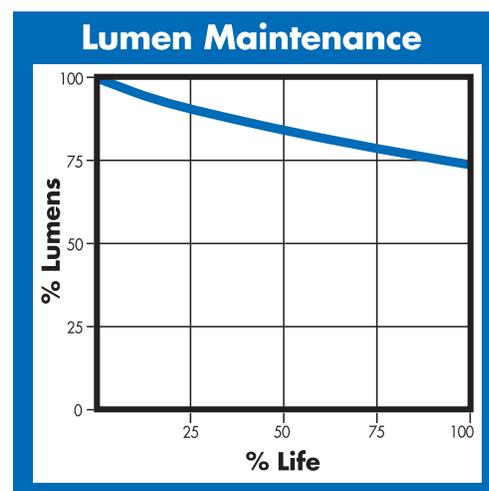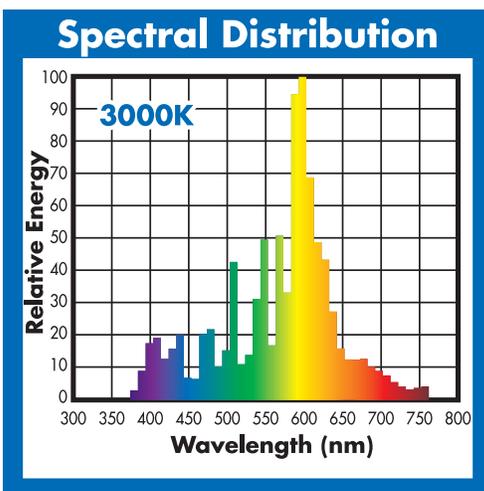

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.

This Product is Recyclable Through Smartpac