

WMV SERIES Outdoor Lighting

WMV-20W-30K
WMV-20W-40K
WMV-20W-50K



Selection:



LED Versatile Wall Pack is ideal for general site lighting, loading docks, doorway, pathway and parking areas.


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

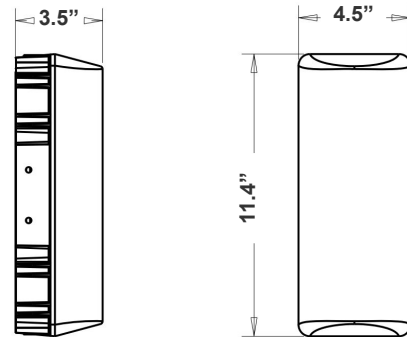

11.4"(L) x 4.5"(W) x 3.5"(H)

Features

- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- High Lumen
- ADC12 Aluminum Heat Sink, Outdoor Powder Coated
- Vandal Resistant Housing Ideal for Exposed Areas
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 20W
- Power Factor: >0.90
- Efficacy: 100 LPW

Mechanical:

- ADC12 Aluminum Heat Sink, Outdoor Powder Coated
- Vandal Resistant Housing Ideal For Exposed Areas
- Two 1/2" Knockouts: 1 Top. 1 Bottom
- High Light Transmittance, Anti-UV and Fire Resistant
- Shatterproof PC Lens
- Operating Temperature: -40°F ~ 104°F
- Lifespan: 70000 Hours
- 7-year Warranty
- IP rating: IP54, Wet Locations

Lighting:

- Dimmable: 0~10V Dimming
- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- Chip: Philips Lumileds Lixeon 3030 High Flux LED
- Lumens Range: 1800LM/1900LM/2000LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 70
- Beam Angle: 110°X130°

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.





Phone: (877) 805-2252 | Fax: (877) 805-2252 |
www.westgatecontrols.co




WG-Z9-Z9-ZZ

Photometrics: WMV-20W



BUD Rating: B1-U3-G1

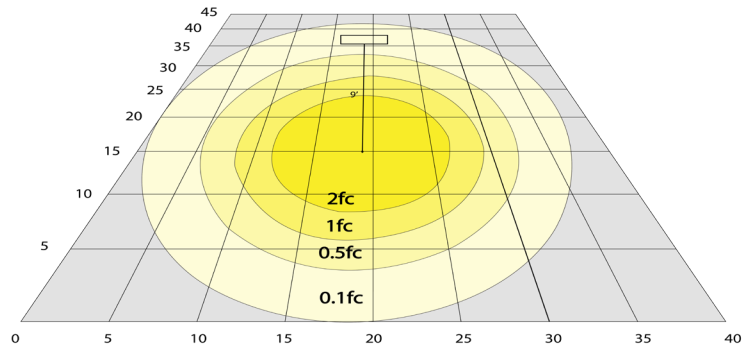

Simulation based on 4000K Area 45'x 40' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: WMV-20W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMV-20W-30K	20W	120~277V	1800LM	3000K	B1-U3-G1	90
WMV-20W-40K	20W	120~277V	1900LM	4000K	B1-U3-G1	95
WMV-20W-50K	20W	120~277V	2000LM	5000K	B1-U3-G1	100

Sample Ordering

Model	Wattage	Color Temp.
WMV	20W	 3000K 4000K 5000K

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-OD1INT= EMERGENCY BACKUP INTERNAL BATTERY, BACK BOX

OPT-SEN-3MRLV-5= PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR

OPT-PC-B = PHOTOCELL 120-277V

OPT-CLR-70 = COLOR PAINT

WEC-8RC = REMOTE CONTROL

OPT-TRS-T20 = TAMPER RESISTANT SCREW

FACTORY-INSTALLED OPTIONS:



OPT-EM-OD1INT



OPT-PC-B



OPT-SEN-3MRLV-5



WEC-8RC

Example:

1. WMV-20W-3000K

2. WMV-20W-3000K

OPT-EM-OD1INT

(FOR WMV 20W 30K FIXTURE 120-277V)

(FOR WMV 20W 30K FIXTURE 120-277V)

(EMERGENCY BACKUP INTERNAL BATTERY, BACK BOX)

