


Chase King/Queen Bed

Assembly Instructions

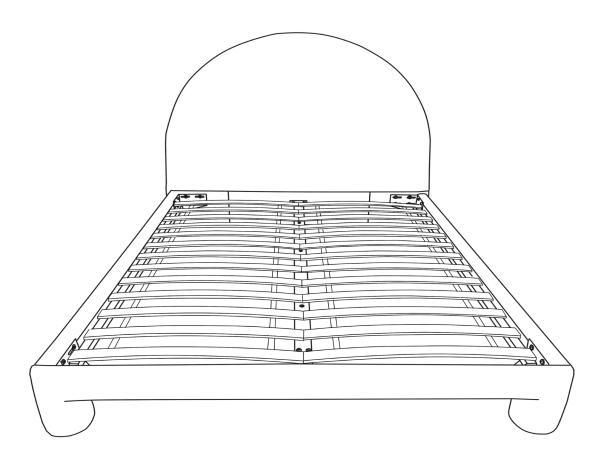

PARTS LIST —

LABEL	PICTURE	DESCRIPTION	QTY
A	11 0 11	HEADBOARD	1
В		SIDERAIL	2
С		FOOTBOARD	1
D		SLAT	2
E		Support Bar	1
F		Slat Support Leg	3

_____ HARDWARE _____

LABEL	PICTURE	DESCRIPTION	QTY
н	()	Bolt M8*30MM	44
ı	0	Spring Washer	36
J	0	Metal Gasket	36
К	0	Slat Support Leg Bolt M8*45MM	3
L	£>>	Wrench	1
M		Metal plate	4
N		Allen Key	1



BEFORE BEGINNING ASSEMBLY:



Read instructions cover to cover



Have two adults on hand for assembly

Do NOT assemble on flooring or carpet. Assemble on a clean nonmarring surface (ex: packing foam)




Save all packaging until assembly is completed

ASSEMBLY STEPS

STEP 1

Attach the siderail(B) to heardboard(A) and footboard(C) by using metal plate(M), Bolt(H), spring washer(I), metal gasket(J)

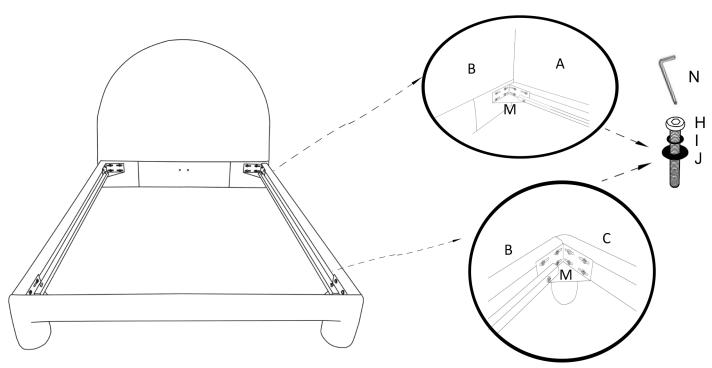



ASSEMBLY STEPS

Attach the 3 support legs to the support bar and ensure all legs are securely attached.

STEP 2

Connect the support bar to the HB and FB, secure them using the Cross Slat Bolt.

Position the slat frames inside the bed and secure them using the slat bolts. Use the included wrench to tighten them.

The slat support legs have adjustable glides and can be adjusted to level the slat frame as needed-

