

# HORNET™ G2 280-15



**4060**  
PSI

**15**  
L/PM

**HONDA GX390**  
PETROL  
ENGINE TYPE  
POWERED by HONDA

**GEARBOX**  
1450RPM  
DRIVE

**COLD WATER**  
OUTPUT




## HERO INNOVATIONS

- PEXO™**  
Stainless Steel Exoskeleton
- JWPP™**  
Jetwave Italian Premium Pump
- CC™**  
Centralised Control
- AVPS™**  
Anti Vibration Protection System
- MC™**  
Multi Configuration



## APPLICATIONS

- Tradesmen
- Commercial & Exterior Cleaning
- Agriculturist
- Hire & Rental

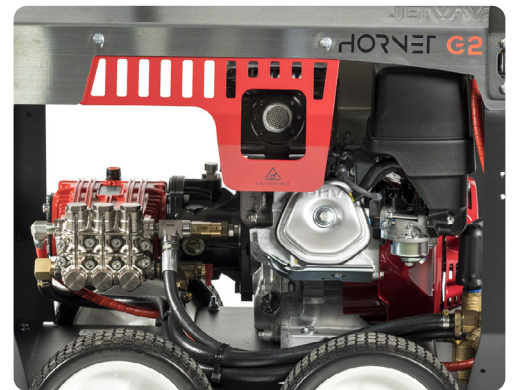

## STANDOUT FEATURES

- JW® Enhanced Italian triplex plunger pump running at 1450RPM delivers more performance and longer life.
- Industrial Honda™ GX390 pull start series engine that delivers performance and reliability.
- Jetwave Safety System™ (JSS) thermal and safety valve to prevent overheating in excessive bypass and over pressurisation.
- Zero line pressure brass adjustable unloader valve.
- Anti flat all terrain wheels for reliable portability on site.
- Emergency stop for increased operator safety.

## STANDARD EQUIPMENT





J5000™ High Pressure Gun + Twin Lance with Nozzles.



15m Double Wire Braid Hose w/M22 Couplings.

Photos for illustration purposes only

## DIMENSIONS (MM)

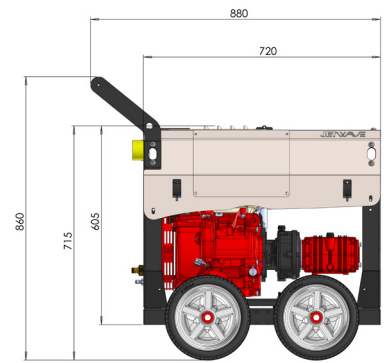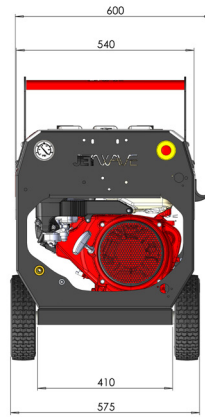

Drawing for dimension only

## TECHNICAL DATA 0:00

## HORNET G2 280-15

Product Code	CW4000-15PG2
Pressure / Flow Rate	4060PSI (280 BAR) / 15 L/PM
Max Water Inlet Temp	60°C
Class (ASNZS: 4223)	A (4,200 Bar/Litres)
Usage Frequency	Professional: 4 Hours Daily
Nozzle Size	04
Frame Structure	CNC Modular galvanised sheet steel chassis plus satin powder coat finish and <b>stainless steel cover</b>

## MOTOR FEATURES

Engine / Power	Honda™ GX390 Pull Start (air cooled) 13HP / 390cc
Fuel Type / Capacity / Protection	Unleaded / 6.1L / Low Oil Shutdown

## HYDRAULIC FEATURES

Pump / Head / Pistons	JW® Italian Triplex Plunger / Brass (Nickle Plated) / Ceramic
Motor Pump Coupling / Pump RPM	Gearbox Drive / 1450RPM
Unloader Valve	Independent (Zero) - Adjustable (Panel Mounted)
Safety Valve	Yes
Detergent Injector	Yes - Downstream low pressure (power boost)

## DIMENSIONS & WEIGHT

Machine Dimensions / Weight	880mm(L) x 575mm(W) x 860mm(H) / 86KG (approx.)
-----------------------------	---

## WARRANTY(S)

Unit / Pump Warranty*	2 Year(s)
Engine Warranty*	3 Year(s)

## OPTIONAL ACCESSORIES

30m Hose Reel	1060CMLP-H30M
JW12 Foaming Lance w/1L Tank	JWA221-LS12
JW Bypass Pro Foam	PROFOAM.04
Turbo Head w/Lance (300BAR)	JWA160.04
21" Hammerhead - Plastic	JWA-FSC21.04
21" Hammerhead - Stainless Steel	JWA-FSC21-5.04

## OPTIONAL UPGRADES

Top Lift Eyelets Kit	JWA551
Wheel Brake System Kit	JWA-WBS
Engine Hour Meter	TACHHOUR8075

Copyright © 2022 Jetwave® Group Pty Ltd. All Rights Reserved.

The manufacturer reserves the right to modify design features and technical facts without notice.

\*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs). See website for more details [jetwavegroup.com.au/product-warranty](http://jetwavegroup.com.au/product-warranty)

V2.4 09/22