



ENERG
енергия · ενεργεια

Y IJA
IE IA



Indoor unit
Outdoor unit


E*ST17/20D-**D
SUZ-SWM60VA



A++



A+

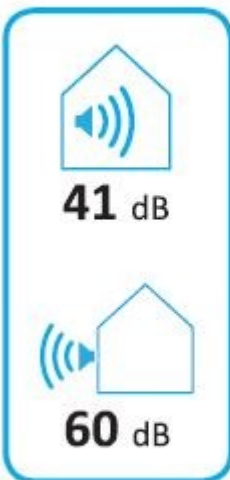

2019

811/2013

BH79N773H02

1	2	For medium-temperature application												For low-temperature application																													
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24																				
Outdoor unit	Indoor unit	Medium-temperature application	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level L _{WA,indoor}	Work only during off-peak hours	Rated heat output under colder climate conditions	Rated heat output under warmer climate conditions	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under warmer climate conditions	For water heating, annual energy consumption under colder climate conditions	For water heating, annual energy consumption under warmer climate conditions	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	Water heating energy efficiency under colder climate conditions	Water heating energy efficiency under warmer climate conditions	Sound power level L _{WA,outdoor}	Low-temperature application	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level L _{WA,indoor}	Work only during off-peak hours	Rated heat output under colder climate conditions	Rated heat output under warmer climate conditions	For space heating, annual energy consumption under colder climate conditions	For space heating, annual energy consumption under warmer climate conditions	For water heating, annual energy consumption under colder climate conditions	For water heating, annual energy consumption under warmer climate conditions	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	Water heating energy efficiency under colder climate conditions	Water heating energy efficiency under warmer climate conditions	Sound power level L _{WA,outdoor}
SUZ-SWM40VA	EHST17D-**D	✓	A++	A+	4.6	2788	722	129	148	41	-	3.5	4.6	3065	1503	900	641	105	155	119	167	58	✓	A+++	A+	5.1	2198	722	180	148	41	-	4.3	5.1	2770	1192	900	641	141	216	119	167	58
	ERST17D-**D	✓	A++	A+	4.6	2788	722	132	148	41	-	3.5	4.6	3065	1503	900	641	108	160	119	167	58	✓	A+++	A+	5.1	2198	722	187	148	41	-	4.3	5.1	2770	1192	900	641	145	225	119	167	58
	EHST20D-**D	✓	A++	A+	4.6	2788	675	129	159	41	-	3.5	4.6	3065	1503	823	621	105	155	130	173	58	✓	A+++	A+	5.1	2198	675	180	159	41	-	4.3	5.1	2770	1192	823	621	141	216	130	173	58
	ERST20D-**D	✓	A++	A+	4.6	2788	675	132	159	41	-	3.5	4.6	3065	1503	823	621	108	160	130	173	58	✓	A+++	A+	5.1	2198	675	187	159	41	-	4.3	5.1	2770	1192	823	621	145	225	130	173	58
	EHSD-**D	✓	A++	-	4.6	2788	-	129	-	41	-	3.5	4.6	3065	1503	-	-	105	155	-	-	58	✓	A+++	-	5.1	2198	-	180	-	41	-	4.3	5.1	2770	1192	-	-	141	216	-	-	58
	ERSD-**D	✓	A++	-	4.6	2788	-	132	-	41	-	3.5	4.6	3065	1503	-	-	108	160	-	-	58	✓	A+++	-	5.1	2198	-	187	-	41	-	4.3	5.1	2770	1192	-	-	145	225	-	-	58
SUZ-SWM60VA	EHST17D-**D	✓	A++	A+	6.0	3612	744	130	144	41	-	4.1	6.0	3581	2215	900	641	106	138	119	167	60	✓	A+++	A+	6.6	2845	744	181	144	41	-	4.5	6.6	2902	1755	900	641	143	192	119	167	60
	ERST17D-**D	✓	A++	A+	6.0	3612	744	133	144	41	-	4.1	6.0	3581	2215	900	641	109	142	119	167	60	✓	A+++	A+	6.6	2845	744	187	144	41	-	4.5	6.6	2902	1755	900	641	148	198	119	167	60
	EHST20D-**D	✓	A++	A+	6.0	3612	721	130	148	41	-	4.1	6.0	3581	2215	821	621	106	138	130	173	60	✓	A+++	A+	6.6	2845	721	181	148	41	-	4.5	6.6	2902	1755	821	621	143	192	130	173	60
	ERST20D-**D	✓	A++	A+	6.0	3612	721	133	148	41	-	4.1	6.0	3581	2215	821	621	109	142	130	173	60	✓	A+++	A+	6.6	2845	721	187	148	41	-	4.5	6.6	2902	1755	821	621	148	198	130	173	60
	EHSD-**D	✓	A++	-	6.0	3612	-	130	-	41	-	4.1	6.0	3581	2215	-	-	106	138	-	-	60	✓	A+++	-	6.6	2845	-	181	-	41	-	4.5	6.6	2902	1755	-	-	143	192	-	-	60
	ERSD-**D	✓	A++	-	6.0	3612	-	133	-	41	-	4.1	6.0	3581	2215	-	-	109	142	-	-	60	✓	A+++	-	6.6	2845	-	187	-	41	-	4.5	6.6	2902	1755	-	-	148	198	-	-	60
SUZ-SWM80VA	EHST17D-**D	✓	A++	A+	7.1	4268	744	131	144	41	-	4.4	7.1	3809	2688	900	641	106	135	119	167	62	✓	A+++	A+	7.1	3060	744	182	144	41	-	4.9	7.1	3120	1952	900	641	144	186	119	167	62
	ERST17D-**D	✓	A++	A+	7.1	4268	744	133	144	41	-	4.4	7.1	3809	2688	900	641	109	138	119	167	62	✓	A+++	A+	7.1	3060	744	187	144	41	-	4.9	7.1	3120	1952	900	641	148	191	119	167	62
	EHST20D-**D	✓	A++	A+	7.1	4268	721	131	148	41	-	4.4	7.1	3809	2688	821	621	106	135	130	173	62	✓	A+++	A+	7.1	3060	721	182	148	41	-	4.9	7.1	3120	1952	821	621	144	186	130	173	62
	ERST20D-**D	✓	A++	A+	7.1	4268	721	133	148	41	-	4.4	7.1	3809	2688	821	621	109	138	130	173	62	✓	A+++	A+	7.1	3060	721	187	148	41	-	4.9	7.1	3120	1952	821	621	148	191	130	173	62
	EHST30D-**D	✓	A++	A+	7.1	4268	1358	131	127	41	-	4.4	7.1	3809	2688	1605	1053	106	135	107	164	62	✓	A+++	A+	7.1	3060	1358	182	127	41	-	4.9	7.1	3120	1952	1605	1053	144	186	107	164	62
	ERST30D-**D	✓	A++	A+	7.1	4268	1358	133	127	41	-	4.4	7.1	3809	2688	1605	1053	109	138	107	164	62	✓	A+++	A+	7.1	3060	1358	187	127	41	-	4.9	7.1	3120	1952	1605	1053	148	191	107	164	62
	EHSD-**D	✓	A++	-	7.1	4268	-	131	-	41	-	4.4	7.1	3809	2688	-	-	106	135	-	-	62	✓	A+++	-	7.1	3060	-	182	-	41	-	4.9	7.1	3120	1952	-	-	144	186	-	-	62
	ERSD-**D	✓	A++	-	7.1	4268	-	133	-	41	-	4.4	7.1	3809	2688	-	-	109	138	-	-	62	✓	A+++	-	7.1	3060	-	187	-	41	-	4.9	7.1	3120	1952	-	-	148	191	-	-	62

	English	Deutsch	Français	Italiano	Español
	Nederlands	Nederlands	Português	Português	EA/Amúnd
	suomi	Svenska	Български	Polski	
	Outdoor unit	Außengerät	unité extérieure	unità esterna	unidad exterior
	1 Indoor unit	Innenstrahlgerät	Устройство	unidad exterior	Екстернал јединица
	2 Indoor unit	Innenstrahlgerät	unité intérieure	unità interna	unidad interior
	3 Medium-temperature application	Mitteltemperaturanwendung	Вътрешно тяло	Interior unit	Екстернал јединица
	4 Low-temperature application	Niedertemperaturanwendung	Използване в умерена температура	Interior unit	
	5 de seizoenafhankelijk energie-efficiëntieklasse voor ruimteverwarming	de afzonderlijke energie-efficiëntieklasse voor ruimteverwarming	de afzonderlijke energie-efficiëntieklasse voor ruimteverwarming	de afzonderlijke energie-efficiëntieklasse voor ruimteverwarming	
	6 de energie-efficiëntieklasse voor waterverwarming	de afzonderlijke energie-efficiëntieklasse voor waterverwarming	de afzonderlijke energie-efficiëntieklasse voor waterverwarming	de afzonderlijke energie-efficiëntieklasse voor waterverwarming	
	7 de afzonderlijke energie-efficiëntieklasse voor ruimteverwarming	de afzonderlijke energie-efficiëntieklasse voor ruimteverwarming	de afzonderlijke energie-efficiëntieklasse voor ruimteverwarming	de afzonderlijke energie-efficiëntieklasse voor ruimteverwarming	
	8 voor ruimteverwarming, het jaarlijkse energieverbruik (onder gemiddelde klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik (onder gemiddelde klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik (onder gemiddelde klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik (onder gemiddelde klimaatomstandigheden)	
	9 voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder gemiddelde klimaatomstandigheden)	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder gemiddelde klimaatomstandigheden)	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder gemiddelde klimaatomstandigheden)	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder gemiddelde klimaatomstandigheden)	
	10 de afzonderlijke energie-efficiëntie voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	de afzonderlijke energie-efficiëntie voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	de afzonderlijke energie-efficiëntie voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	de afzonderlijke energie-efficiëntie voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	
	11 de afzonderlijke energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	de afzonderlijke energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	de afzonderlijke energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	de afzonderlijke energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	
	12 het geluidswaarnemingsniveau L _{WA} binnen	Sound power level L _{WA} indoors	Sound power level L _{WA} indoors	Sound power level L _{WA} indoors	
	13 het geluidswaarnemingsniveau L _{WA} buiten	Sound power level L _{WA} outdoors	Sound power level L _{WA} outdoors	Sound power level L _{WA} outdoors	
	14 de nominale warmteafgifte, onder koelende klimaatomstandigheden	Rated heat output under cooling climate conditions	Rated heat output under cooling climate conditions	Rated heat output under cooling climate conditions	
	15 de nominale warmteafgifte, onder warmte klimaatomstandigheden	Rated heat output under heating climate conditions	Rated heat output under heating climate conditions	Rated heat output under heating climate conditions	
	16 voor ruimteverwarming, het jaarlijkse energieverbruik onder koelende klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder koelende klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder koelende klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder koelende klimaatomstandigheden	
	17 voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koelende klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koelende klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koelende klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koelende klimaatomstandigheden	
	18 voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koelende klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koelende klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koelende klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koelende klimaatomstandigheden	
	19 voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koelende klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koelende klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koelende klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koelende klimaatomstandigheden	
	20 de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	
	21 de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	
	22 de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	
	23 de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	de afzonderlijke energie-efficiëntie voor ruimteverwarming onder koelende klimaatomstandigheden	
	24 het geluidswaarnemingsniveau L _{WA} buiten	Sound power level L _{WA} outdoors	Sound power level L _{WA} outdoors	Sound power level L _{WA} outdoors	

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	EHST17D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	η_s	130	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	5.3	kW	Tj = - 7 °C	COPd	2.04	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	3.2	kW	Tj = + 2 °C	COPd	3.33	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 7 °C	Pdh	2.6	kW	Tj = + 7 °C	COPd	4.48	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = +12 °C	Pdh	2.6	kW	Tj = +12 °C	COPd	6.34	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	5.3	kW	Tj = bivalent temperature	COPd	2.04	-
Tj = operation limit temperature	Pdh	4.4	kW	Tj = operation limit temperature	COPd	1.45	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2070	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	3612	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}	144	%	
Daily electricity consumption	Q _{elec}	3.400	kW/h				
Annual electricity consumption	AEC	744	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	EHST17D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.6	kW	Seasonal space heating energy efficiency	η_s	181	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.8	kW	T _j = - 7 °C	COP _d	3.02	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.6	kW	T _j = + 2 °C	COP _d	4.56	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.8	kW	T _j = + 7 °C	COP _d	6.36	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = +12 °C	P _{dh}	2.6	kW	T _j = +12 °C	COP _d	8.39	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	5.8	kW	T _j = bivalent temperature	COP _d	3.02	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	1.1	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2070	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	2845	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}	144	%	
Daily electricity consumption	Q _{elec}	3.400	kW/h				
Annual electricity consumption	AEC	744	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	EHST17D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.1	kW	Seasonal space heating energy efficiency	η_s	106	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	2.8	kW	T _j = - 7 °C	COP _d	2.41	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 2 °C	P _{dh}	2.5	kW	T _j = + 2 °C	COP _d	3.29	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.2	kW	T _j = + 7 °C	COP _d	4.07	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	1.9	kW	T _j = +12 °C	COP _d	5.76	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	3.9	kW	T _j = bivalent temperature	COP _d	1.36	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	4.1	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2070	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	3581	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}	119	%	
Daily electricity consumption	Q _{elec}	4.100	kW/h				
Annual electricity consumption	AEC	900	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P_{designh}, and the rated heat output of a supplementary heater P_{sup} is equal to the supplementary capacity for heating sup(T_j).

(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	EHST17D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.5	kW	Seasonal space heating energy efficiency	η_s	143	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.2	kW	T _j = - 7 °C	COP _d	3.52	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 2 °C	P _{dh}	2.7	kW	T _j = + 2 °C	COP _d	4.29	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = + 7 °C	P _{dh}	2.3	kW	T _j = + 7 °C	COP _d	5.00	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = +12 °C	P _{dh}	2.0	kW	T _j = +12 °C	COP _d	6.90	-
Degradation co-efficient (**)	C _{dh}	0.94	-				
T _j = bivalent temperature	P _{dh}	4.3	kW	T _j = bivalent temperature	COP _d	2.06	-
T _j = operation limit temperature	P _{dh}	4.3	kW	T _j = operation limit temperature	COP _d	2.06	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	4.5	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)
Annual energy consumption	Q _{HE}	2902	kWh
Rated air flow rate, outdoors		2070	m ³ /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q _{elec}	4.100	kWh
Annual electricity consumption	AEC	900	kWh
Water heating energy efficiency	η_{wh}	119	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	EHST17D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	η_s	138	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	6.0	kW	T _j = + 2 °C	COP _d	1.87	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	2.87	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	1.9	kW	T _j = +12 °C	COP _d	5.00	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	5.3	kW	T _j = bivalent temperature	COP _d	1.93	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)
Annual energy consumption	Q _{HE}	2215	kWh
Rated air flow rate, outdoors		2070	m ³ /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q _{elec}	2.900	kWh
Annual electricity consumption	AEC	641	kWh
Water heating energy efficiency	η_{wh}	167	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P_{designh}, and the rated heat output of a supplementary heater P_{sup} is equal to the supplementary capacity for heating sup(T_j).

(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	EHST17D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.6	kW	Seasonal space heating energy efficiency	η_s	192	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	6.6	kW	T _j = + 2 °C	COP _d	3.32	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.2	kW	T _j = + 7 °C	COP _d	4.08	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	2.0	kW	T _j = +12 °C	COP _d	6.45	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	5.8	kW	T _j = bivalent temperature	COP _d	3.02	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2070	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	1755	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}	167	%	
Daily electricity consumption	Q _{elec}	2.900	kW/h				
Annual electricity consumption	AEC	641	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	ERST17D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	η_s	133	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.3	kW	T _j = - 7 °C	COP _d	2.04	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.2	kW	T _j = + 2 °C	COP _d	3.33	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.6	kW	T _j = + 7 °C	COP _d	4.48	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	2.6	kW	T _j = +12 °C	COP _d	6.34	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	5.3	kW	T _j = bivalent temperature	COP _d	2.04	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2070	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	3612	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}	144	%	
Daily electricity consumption	Q _{elec}	3.400	kW/h				
Annual electricity consumption	AEC	744	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	ERST17D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.6	kW	Seasonal space heating energy efficiency	η_s	187	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.8	kW	T _j = - 7 °C	COP _d	3.02	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.6	kW	T _j = + 2 °C	COP _d	4.56	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.8	kW	T _j = + 7 °C	COP _d	6.36	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = +12 °C	P _{dh}	2.6	kW	T _j = +12 °C	COP _d	8.39	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	5.8	kW	T _j = bivalent temperature	COP _d	3.02	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	1.1	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2070	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	2845	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}	144	%	
Daily electricity consumption	Q _{elec}	3.400	kW/h				
Annual electricity consumption	AEC	744	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	ERST17D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.1	kW	Seasonal space heating energy efficiency	η_s	109	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	2.8	kW	T _j = - 7 °C	COP _d	2.41	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 2 °C	P _{dh}	2.5	kW	T _j = + 2 °C	COP _d	3.29	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.2	kW	T _j = + 7 °C	COP _d	4.07	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	1.9	kW	T _j = +12 °C	COP _d	5.76	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	3.9	kW	T _j = bivalent temperature	COP _d	1.36	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	4.1	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2070	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	3581	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}	119	%	
Daily electricity consumption	Q _{elec}	4.100	kW/h				
Annual electricity consumption	AEC	900	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	ERST17D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.5	kW	Seasonal space heating energy efficiency	η_s	148	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.2	kW	T _j = - 7 °C	COP _d	3.52	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 2 °C	P _{dh}	2.7	kW	T _j = + 2 °C	COP _d	4.29	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = + 7 °C	P _{dh}	2.3	kW	T _j = + 7 °C	COP _d	5.00	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = +12 °C	P _{dh}	2.0	kW	T _j = +12 °C	COP _d	6.90	-
Degradation co-efficient (**)	C _{dh}	0.94	-				
T _j = bivalent temperature	P _{dh}	4.3	kW	T _j = bivalent temperature	COP _d	2.06	-
T _j = operation limit temperature	P _{dh}	4.3	kW	T _j = operation limit temperature	COP _d	2.06	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	4.5	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	2070	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	2902	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	119	%
Declared load profile		L					
Daily electricity consumption	Q _{elec}	4.100	kW/h				
Annual electricity consumption	AEC	900	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	ERST17D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	η_s	142	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	6.0	kW	T _j = + 2 °C	COP _d	1.87	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	2.87	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	1.9	kW	T _j = +12 °C	COP _d	5.00	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	5.3	kW	T _j = bivalent temperature	COP _d	1.93	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2070	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	2215	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}	167	%	
Daily electricity consumption	Q _{elec}	2.900	kW/h				
Annual electricity consumption	AEC	641	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	ERST17D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.6	kW	Seasonal space heating energy efficiency	η_s	198	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	6.6	kW	Tj = + 2 °C	COPd	3.32	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	4.2	kW	Tj = + 7 °C	COPd	4.08	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	2.0	kW	Tj = +12 °C	COPd	6.45	-
Degradation co-efficient (**)	Cdh	0.95	-				
Tj = bivalent temperature	Pdh	5.8	kW	Tj = bivalent temperature	COPd	3.02	-
Tj = operation limit temperature	Pdh	4.4	kW	Tj = operation limit temperature	COPd	1.45	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)
Annual energy consumption	Q _{HE}	1755	kWh
Rated air flow rate, outdoors		2070	m ³ /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q _{elec}	2.900	kWh
Annual electricity consumption	AEC	641	kWh
Water heating energy efficiency	η_{wh}	167	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	EHST20D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	η_s	130	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.3	kW	T _j = - 7 °C	COP _d	2.04	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.2	kW	T _j = + 2 °C	COP _d	3.33	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.6	kW	T _j = + 7 °C	COP _d	4.48	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	2.6	kW	T _j = +12 °C	COP _d	6.34	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	5.3	kW	T _j = bivalent temperature	COP _d	2.04	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2070	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	3612	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}	148	%	
Daily electricity consumption	Q _{elec}	3.300	kW/h				
Annual electricity consumption	AEC	721	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	EHST20D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.6	kW	Seasonal space heating energy efficiency	η_s	181	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.8	kW	T _j = - 7 °C	COP _d	3.02	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.6	kW	T _j = + 2 °C	COP _d	4.56	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.8	kW	T _j = + 7 °C	COP _d	6.36	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = +12 °C	P _{dh}	2.6	kW	T _j = +12 °C	COP _d	8.39	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	5.8	kW	T _j = bivalent temperature	COP _d	3.02	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	1.1	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2070	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	2845	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}	148	%	
Daily electricity consumption	Q _{elec}	3.300	kW/h				
Annual electricity consumption	AEC	721	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	EHST20D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.1	kW	Seasonal space heating energy efficiency	η_s	106	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	2.8	kW	T _j = - 7 °C	COP _d	2.41	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 2 °C	P _{dh}	2.5	kW	T _j = + 2 °C	COP _d	3.29	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.2	kW	T _j = + 7 °C	COP _d	4.07	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	1.9	kW	T _j = +12 °C	COP _d	5.76	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	3.9	kW	T _j = bivalent temperature	COP _d	1.36	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	4.1	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	2070	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	3581	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	130	%
Declared load profile		L					
Daily electricity consumption	Q _{elec}	3.700	kW/h				
Annual electricity consumption	AEC	821	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	EHST20D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.5	kW	Seasonal space heating energy efficiency	η_s	143	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	3.2	kW	Tj = - 7 °C	COPd	3.52	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 2 °C	Pdh	2.7	kW	Tj = + 2 °C	COPd	4.29	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = + 7 °C	Pdh	2.3	kW	Tj = + 7 °C	COPd	5.00	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = +12 °C	Pdh	2.0	kW	Tj = +12 °C	COPd	6.90	-
Degradation co-efficient (**)	Cdh	0.94	-				
Tj = bivalent temperature	Pdh	4.3	kW	Tj = bivalent temperature	COPd	2.06	-
Tj = operation limit temperature	Pdh	4.3	kW	Tj = operation limit temperature	COPd	2.06	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	4.5	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)
Annual energy consumption	Q _{HE}	2902	kWh
Rated air flow rate, outdoors		2070	m ³ /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q _{elec}	3.700	kWh
Annual electricity consumption	AEC	821	kWh
Water heating energy efficiency	η_{wh}	130	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	EHST20D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	η_s	138	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	6.0	kW	T _j = + 2 °C	COP _d	1.87	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	2.87	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	1.9	kW	T _j = +12 °C	COP _d	5.00	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	5.3	kW	T _j = bivalent temperature	COP _d	1.93	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)
Annual energy consumption	Q _{HE}	2215	kWh
Rated air flow rate, outdoors		2070	m ³ /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q _{elec}	2.800	kWh
Annual electricity consumption	AEC	621	kWh
Water heating energy efficiency	η_{wh}	173	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	EHST20D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.6	kW	Seasonal space heating energy efficiency	η_s	192	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	6.6	kW	T _j = + 2 °C	COP _d	3.32	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.2	kW	T _j = + 7 °C	COP _d	4.08	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	2.0	kW	T _j = +12 °C	COP _d	6.45	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	5.8	kW	T _j = bivalent temperature	COP _d	3.02	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)
Annual energy consumption	Q _{HE}	1755	kWh
Rated air flow rate, outdoors		2070	m ³ /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q _{elec}	2.800	kWh
Annual electricity consumption	AEC	621	kWh
Water heating energy efficiency	η_{wh}	173	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	ERST20D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	η_s	133	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	5.3	kW	Tj = - 7 °C	COPd	2.04	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	3.2	kW	Tj = + 2 °C	COPd	3.33	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 7 °C	Pdh	2.6	kW	Tj = + 7 °C	COPd	4.48	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = +12 °C	Pdh	2.6	kW	Tj = +12 °C	COPd	6.34	-
Degradation co-efficient (**)	Cdh	0.96	-				
Tj = bivalent temperature	Pdh	5.3	kW	Tj = bivalent temperature	COPd	2.04	-
Tj = operation limit temperature	Pdh	4.4	kW	Tj = operation limit temperature	COPd	1.45	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)
Annual energy consumption	Q _{HE}	3612	kWh
Rated air flow rate, outdoors		2070	m ³ /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q _{elec}	3.300	kWh
Annual electricity consumption	AEC	721	kWh
Water heating energy efficiency	η_{wh}	148	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	ERST20D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.6	kW	Seasonal space heating energy efficiency	η_s	187	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.8	kW	T _j = - 7 °C	COP _d	3.02	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.6	kW	T _j = + 2 °C	COP _d	4.56	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.8	kW	T _j = + 7 °C	COP _d	6.36	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = +12 °C	P _{dh}	2.6	kW	T _j = +12 °C	COP _d	8.39	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	5.8	kW	T _j = bivalent temperature	COP _d	3.02	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	1.1	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)
Annual energy consumption	Q _{HE}	2845	kWh
Rated air flow rate, outdoors		2070	m ³ /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q _{elec}	3.300	kWh
Annual electricity consumption	AEC	721	kWh
Water heating energy efficiency	η_{wh}	148	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	ERST20D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.1	kW	Seasonal space heating energy efficiency	η_s	109	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	2.8	kW	T _j = - 7 °C	COP _d	2.41	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 2 °C	P _{dh}	2.5	kW	T _j = + 2 °C	COP _d	3.29	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.2	kW	T _j = + 7 °C	COP _d	4.07	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	1.9	kW	T _j = +12 °C	COP _d	5.76	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	3.9	kW	T _j = bivalent temperature	COP _d	1.36	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	4.1	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	2070	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	3581	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	130	%
Declared load profile		L					
Daily electricity consumption	Q _{elec}	3.700	kW/h				
Annual electricity consumption	AEC	821	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	ERST20D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.5	kW	Seasonal space heating energy efficiency	η_s	148	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.2	kW	T _j = - 7 °C	COP _d	3.52	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 2 °C	P _{dh}	2.7	kW	T _j = + 2 °C	COP _d	4.29	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = + 7 °C	P _{dh}	2.3	kW	T _j = + 7 °C	COP _d	5.00	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = +12 °C	P _{dh}	2.0	kW	T _j = +12 °C	COP _d	6.90	-
Degradation co-efficient (**)	C _{dh}	0.94	-				
T _j = bivalent temperature	P _{dh}	4.3	kW	T _j = bivalent temperature	COP _d	2.06	-
T _j = operation limit temperature	P _{dh}	4.3	kW	T _j = operation limit temperature	COP _d	2.06	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	4.5	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2070	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	2902	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}	130	%	
Daily electricity consumption	Q _{elec}	3.700	kW/h				
Annual electricity consumption	AEC	821	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	ERST20D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	η_s	142	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	6.0	kW	T _j = + 2 °C	COP _d	1.87	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	2.87	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	1.9	kW	T _j = +12 °C	COP _d	5.00	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	5.3	kW	T _j = bivalent temperature	COP _d	1.93	-
T _j = operation limit temperature	P _{dh}	4.4	kW	T _j = operation limit temperature	COP _d	1.45	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2070	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)				
Annual energy consumption	Q _{HE}	2215	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}	173	%	
Daily electricity consumption	Q _{elec}	2.800	kW/h				
Annual electricity consumption	AEC	621	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	SUZ-SWM60VA
	Indoor unit:	ERST20D-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.6	kW	Seasonal space heating energy efficiency	η_s	198	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	6.6	kW	Tj = + 2 °C	COPd	3.32	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	4.2	kW	Tj = + 7 °C	COPd	4.08	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	2.0	kW	Tj = +12 °C	COPd	6.45	-
Degradation co-efficient (**)	Cdh	0.95	-				
Tj = bivalent temperature	Pdh	5.8	kW	Tj = bivalent temperature	COPd	3.02	-
Tj = operation limit temperature	Pdh	4.4	kW	Tj = operation limit temperature	COPd	1.45	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	41/60	dB(A)
Annual energy consumption	Q _{HE}	1755	kWh
Rated air flow rate, outdoors		2070	m ³ /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q _{elec}	2.800	kWh
Annual electricity consumption	AEC	621	kWh
Water heating energy efficiency	η_{wh}	173	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.