

FLUA®



BERT VM DO



A series of slim rings floating through space, with its retro-look appearance is the best choice for many applications. 3 diameters are available for choice. This circle of leds is specially designed to guarantee a uniform and perfectly balanced light output, resulting in a very enjoyable diffuse lighting effect

Designer	ZCJ
Sales status	On Sale
Product classification	Interior
Model	325114AP2

WWW.FLUA.COM

Installation information

Area	Celing
Method	Suspended
Cut hole size	/
Embedded height	/

Technical general

System power	58W
Flux	3190lm
Beam angle	L
Material	Aluminum
Appearance color	PAB
Size	Φ 905*18mm
Adjustable angle	Not available
Ingress protection	IP20
Input voltage	100-240VAC
Electrical level	Class I

Electrical parameters

Driver brand	DRIARTE
Driver type	FLDW5A2CHT
Electrical installation	Build in
Dimming mode	DIM COLOR by Tuya


Light source parameters

Brand	HONGLI
Type	2835
Power	50.4W
Light color	CW-NW-WW
Color temperature	2700-6000K
CRI	90


Other options

Beam angle	/
Color temperature	/
Color	/
Appearance color	/

3D module

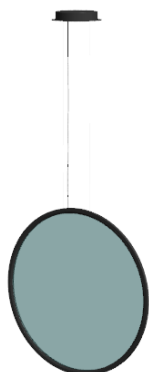

Line drawing

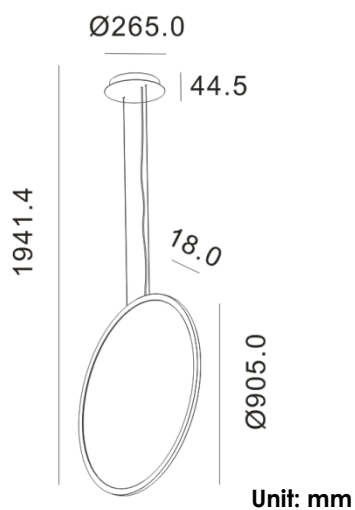

FLUA®

Instructions

Accessory Set

x4 x4
2.0MM

1 Disassemble

Twist screw, rotate out

2 hole pattern

Cable Enter
x4

3

Cable Enter
x4
x4

4

5

Adjustable
AC100-240V

6

Please use dry non-woven fabric to clean the light guide.
Can not touch water.

7

1 Wifi
2 TuyaSmart
3 Add Manually Lighting
4
5 Lighting(SLE+Wi-Fi)
6 Enter WiFi Password
7 Connecting
8 Added successfully

8