

# FLUA®



FLUA®

**FORMULIA CK R 350**



---

Slim body, three lengths optional, can support multiple combinations of installation to play your imagination, be applied to a variety of regional.

---

<b>Designer</b>	<b>FLUA</b>
<b>Sales status</b>	<b>On Sale</b>
<b>Product classification</b>	<b>Interior</b>
<b>Model</b>	<b>548211AP</b>

---

[WWW.FLUA.COM](http://WWW.FLUA.COM)


## Installation information

Area	Ceiling
Method	Track
Cut hole size	/
Embedded height	/

## Technical general

System power	7.4W
Flux	313 lm
Beam angle	20°
Material	Steel
Appearance color	PAB
Size	Φ25*350mm
Adjustable angle	Not available
Ingress protection	IP20
Input voltage	48VDC
Electrical level	ClassIII

## Photometric graph

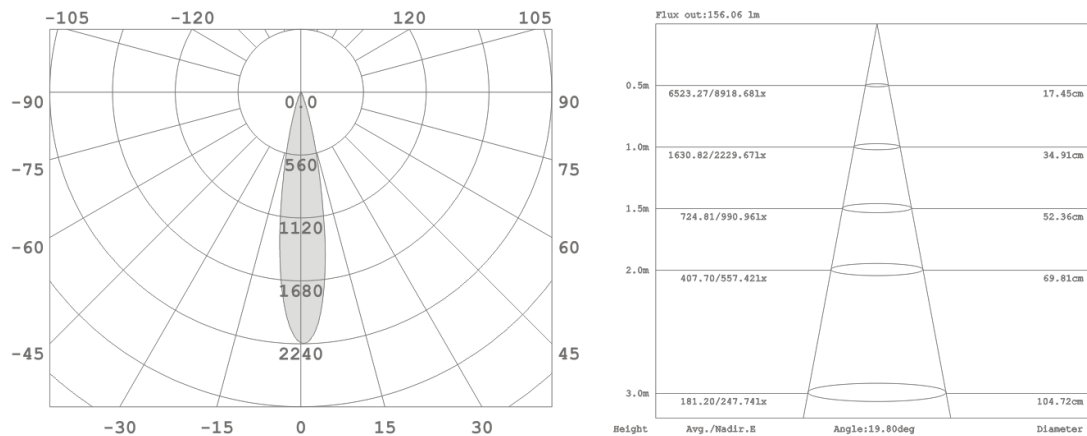

---

## Electrical parameters

Driver brand	DRIARTE
Driver type	DW350-700L
Electrical installation	Build in
Dimming mode	DIM COLOR

---

## Light source parameters

Brand	CREE
Type	XHP35A
Power	5.8W
Light color	WW
Color temperature	3000K
CRI	90

---

## Other options


Beam angle	/
Color temperature	2700K,4000K
Color	/
Appearance color	PAW,WLG

---

## 3D module



## Line drawing



Unit: mm

# FLUA®

## Instructions

