

# FLUA®



FAVOR INL 25 REFLECTOR



---

The series designed with a vertical and hidden deep light source. It's light hole is small. It can provide sufficient brightness, at the same time, it is good to prevent the direct light of your eyes. Complete range of products offer a variety of installation, different power wattages and appearance for options.

---

Designer	FLUA
Sales status	On Sale
Product classification	Interior
Model	193315A

---

[WWW.FLUA.COM](http://WWW.FLUA.COM)

## Installation information


Area	Ceiling
Method	Recessed
Cut hole size	Φ 95mm
Embedded height	/

## Technical general


System power	29W	
Flux	1550lm	
Beam angle	25°	
Material	Aluminum	
Appearance color	PAW	
Size	Φ 126*224mm	
Adjustable angle	Available	
Ingress protection	IP20	
Input voltage	100-240VAC	50/60Hz
Electrical level	Class II	

## Photometric graph

25W 25° 3000K

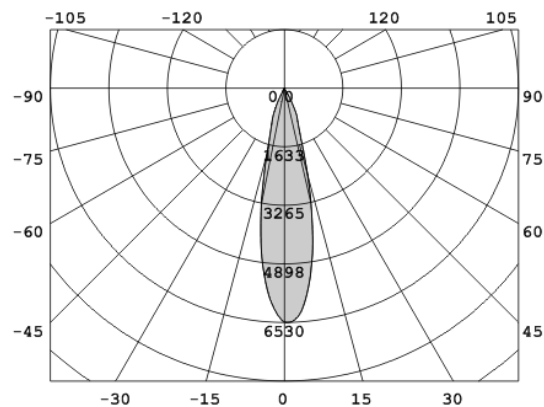

25W 25° 3000K

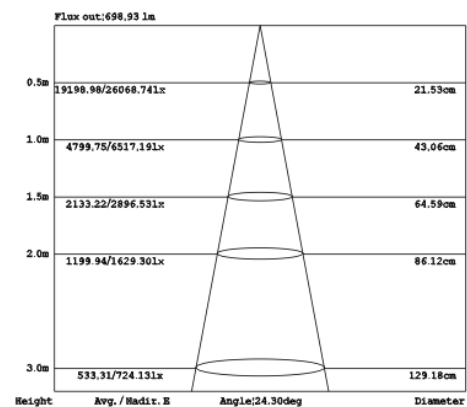

## Electrical parameters

Driver brand	HEP
Driver type	LCD36W700
Electrical installation	Build in

---

## Light source parameters

Brand	LUMINUS
Type	CXM-14
Power	25W
Light color	WW
Color temperature	3000K
CRI	90

---

## Other options

Beam angle	15° 36°
Color temperature	4000K 5000K
Color	/
Appearance color	PAB


Dimming model	193315DT
Dimming mode	TRIAC dimming
Driver brand	HEP
Driver type	LNTC30W700LRP
Input voltage	220-240VAC

Dimming model	193315DA
Dimming mode	DALI
Driver brand	LTECH
Driver type	DALI-36-200-1200-E1A1
Input voltage	220-240VAC

---

3D module

Line drawing



Unit: mm

## Instructions

