

FLUA®



KUBIK IN M SINGLE



Square looking, with the ceiling recessed mounting, ceiling surface, and wall surface design. Triac dimming function can meet your different light requirement. Recessed could be combined with three kinds of frames, users can select the desired one according to their demands. The covers of surface mounted products are easy to install, customers can easily replace the surface cover into different colors, to make life colorful.

Designer	RXM
Sales status	On Sale
Product classification	Interior
Model	196519EDT



Installation information

Area	Ceiling
Method	Recessed
Cut hole size	70*70mm
Embedded height	/

Technical general

System power	11.12W
Flux	651lm
Beam angle	31°
Material	Aluminum
Appearance color	WBL-WWH
Size	90*90*58.5mm
Adjustable angle	Not available
Ingress protection	IP20
Input voltage	220-240VAC
Electrical level	Class II

Photometric graph

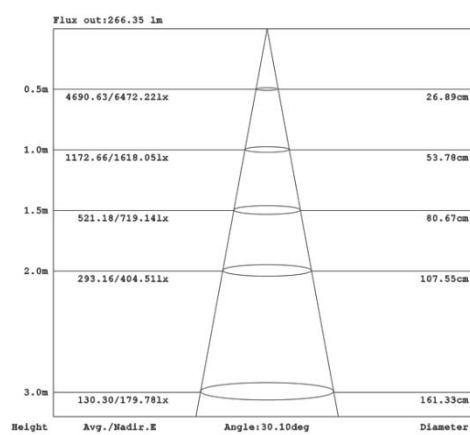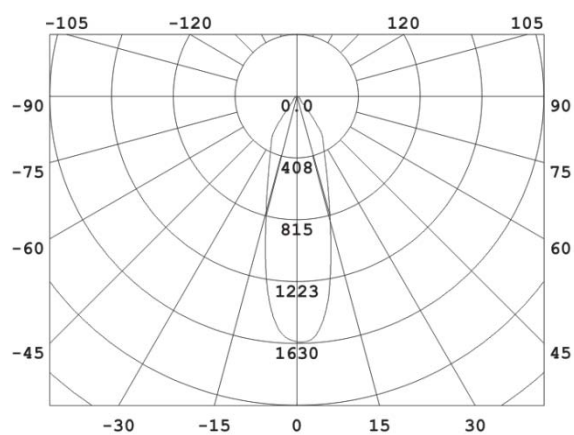

Electrical parameters

Driver brand	DRIARTE
Driver type	FLMT12W500T
Electrical installation	External
Dimming mode	TRIAC dimming

Light source parameters

Brand	FLUA
Type	LT-A3010I
Power	9.35W
Light color	WW
Color temperature	3000K
CRI	90


Other options

Beam angle	23° 47°
Color temperature	4000K
Color	/
Appearance color	WWH/WBL/WWH-WBL/WWH-WSG/WWH-WGL/ WBL-WSG/WBL-WGL

FLUA®

3D module

Line drawing

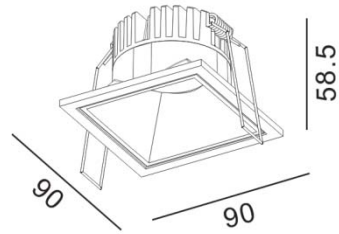

Unit: mm

Instructions

