

FLUA®



OCEAN S 1.1



OCEAN linear series is a modern and highly efficient solution for architectural and decorative lighting. The fixture provides uniform indirect lighting and is ideal for decorative lighting of buildings, plazas, historic and cultural sites, monuments, parks. OCEAN series is available in mono color and RGB models. The luminaire is available in three standard lengths, 500 mm, 1000 mm, 1500 mm

Designer	FLUA
Sales status	On Sale
Product classification	Exterior
Model	817116A

Installation information

Area	GROUND
Method	Surface mounted
Cut hole size	/
Embedded height	/

Technical general

System power	12W
Flux	880lm
Beam angle	22°
Material	Aluminum,
Appearance color	AGS
Size	500*40*74mm
Adjustable angle	Available
Ingress protection	IP65
Input voltage	100-240VAC
Electrical level	Class I

Electrical parameters

Driver brand	DRIARTE
Driver type	FLSN12W300T
Electrical installation	Build in

Light source parameters

Brand	LUMILEDS
Type	L130
Power	/
Light color	WW
Color temperature	2700K
CRI	90


Other options

Beam angle	15°
Color temperature	3000K,4000K
Color	/
Appearance color	/

3D module



Line drawing

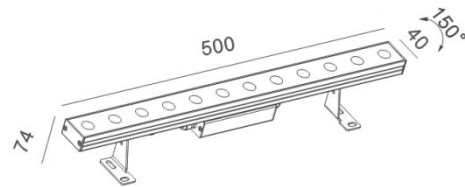

Unit: mm

Instructions

Accessory Set

x4
4.0MM
2.0MM

1 hole pattern

Ø6
22
MAX 370

2

Disassemble
x4

3

x4

4

4.0
2.0
x4

5

Attention

L N
AC 100-240V
* ⊕ yellow/green

L N
⚠ Connection box (IP65)