

FLUA®



TURN ON S



TURN is the surface mounted ceiling light with multi-angle function. There are two shapes, sizes and powers for option. The bottom part can be rotated within 360 degrees which allows a lighting range from direct vertical to 90°horizontal lighting, thus the emitting area is wide. It can be applied for example, to spot paintings on the wall or vertically normal lighting from ceiling.

| | |
|-------------------------------|----------|
| Designer | FLUA |
| Sales status | On Sale |
| Product classification | Interior |
| Model | 215319EA |

WWW.FLUA.COM


Installation information

| | |
|-----------------|-----------------|
| Area | Ceiling |
| Method | Surface Mounted |
| Cut hole size | / |
| Embedded height | / |

Technical general

| | |
|--------------------|-------------------------|
| System power | 8.5W |
| Flux | 607lm |
| Beam angle | 38° |
| Material | Aluminum |
| Appearance color | PAW-PAB |
| Size | Φ62*162mm |
| Adjustable angle | Available |
| Ingress protection | IP20 |
| Input voltage | 100-240VAC 50/60Hz |
| Electrical level | Class I |

Photometric graph

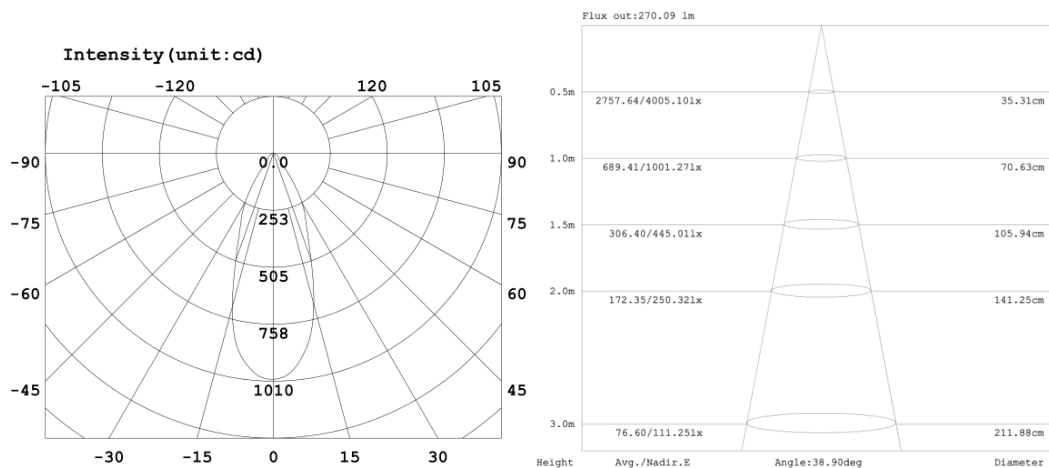

Electrical parameters

| | |
|-------------------------|------------|
| Driver brand | DRIARTE |
| Driver type | FLMN9W350T |
| Electrical installation | Build in |

Light source parameters

| | |
|-------------------|-----------|
| Brand | FLUA |
| Type | LT-A3015I |
| Power | 7.4W |
| Light color | WW |
| Color temperature | 3000K |
| CRI | 90 |

Other options


| | |
|-------------------|-------------------------|
| Beam angle | 28° 48° |
| Color temperature | 2700K 4000K 5000K 6500K |
| Color | / |
| Appearance color | PAB-WGL/PAW-WBL |
| Dimming model | 215319EDT |
| Dimming mode | TRIAC dimming |
| Driver brand | DRIARTE |
| Driver type | FLMT9W350T |
| Input voltage | 220-240VAC |

FLUA®

3D module



Line drawing

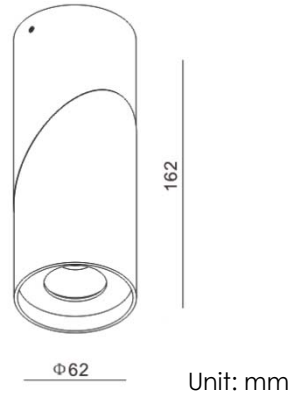

Instructions

