

FLUA®



VIKA WALL M



With anti-glare design, VIKA serious take you into a lighting world full of gentleness. Certified with IP54, It's capable of most interior lighting demands. And both round and square version are at your service. You may also design your own square VIKA combo from bachelor to twins, and to three "musketees"

Designer	FLUA
Sales status	On Sale
Product classification	Interior
Model	439519EDT

WWW.FLUA.COM



Installation information

Area	Wall
Method	Surface Mounted
Cut hole size	/
Embedded height	/

Technical general

System power	15.4W
Flux	1010lm
Beam angle	28°
Material	Aluminum
Appearance color	PAW-WBP
Size	91*91*100mm
Adjustable angle	Not available
Ingress protection	IP54
Input voltage	220-240VAC
Electrical level	Class I

Photometric graph

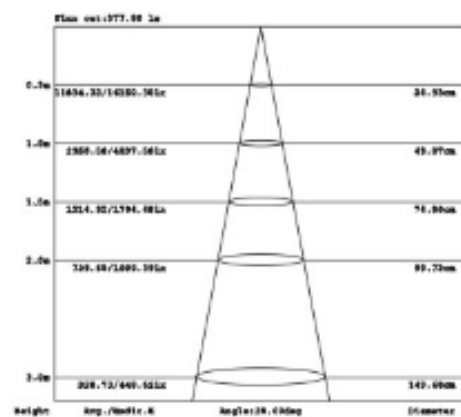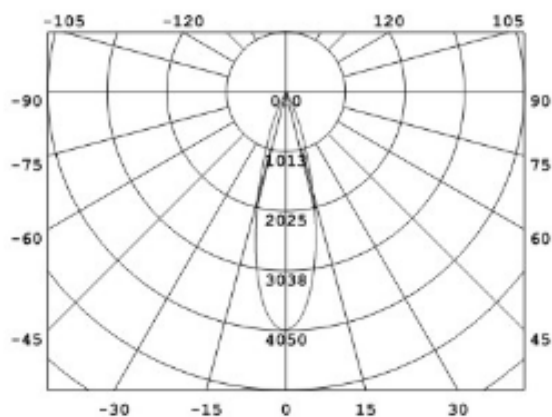

Electrical parameters

Driver brand	DRIARTE
Driver type	FLMT20W350T
Electrical installation	Build in
Dimming mode	TRIAC dimming

Light source parameters

Brand	FLUA
Type	GZ111
Power	12.6W
Light color	WW
Color temperature	3000K
CRI	90


Other options

Beam angle	21°,37°
Color temperature	2700K 4000K
Color	/
Appearance color	PAB-WBP/PAW-WWP

FLUA®

3D module

Line drawing

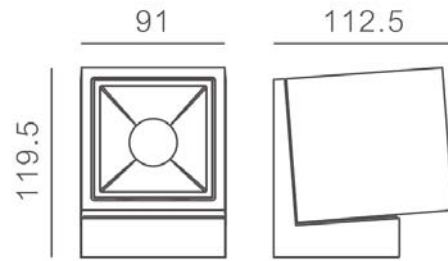

Unit: mm

Instructions

