

# FLUA®



## VIKA WALL S



---

With anti-glare design, VIKA serious take you into a lighting world full of gentleness. Certified with IP54, It's capable of most interior lighting demands. And both round and square version are at your service. You may also design your own square VIKA combo from bachelor to twins, and to three "musketees"

---

<b>Designer</b>	FLUA
<b>Sales status</b>	On Sale
<b>Product classification</b>	Interior
<b>Model</b>	439419EDT

---

[WWW.FLUA.COM](http://WWW.FLUA.COM)



## Installation information

Area	Wall
Method	Surface Mounted
Cut hole size	/
Embedded height	/

## Technical general

System power	7.4W
Flux	404lm
Beam angle	26°
Material	Aluminum
Appearance color	PAW-WBP
Size	92*89*71mm
Adjustable angle	Not available
Ingress protection	IP54
Input voltage	220-240VAC
Electrical level	Class I

## Photometric graph

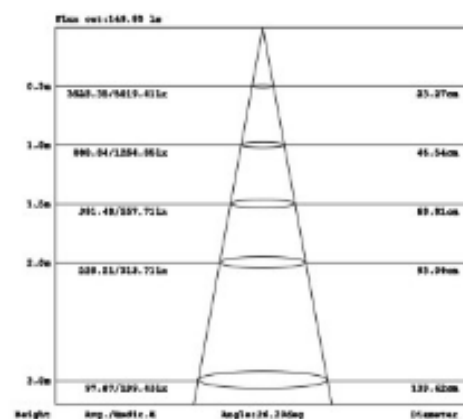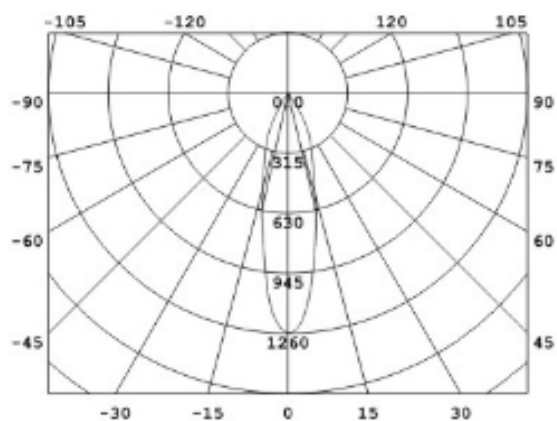

## Electrical parameters

Driver brand	DRIARTE
Driver type	FLMT9W350T
Electrical installation	Build in
Dimming mode	TRIAC dimming

---

## Light source parameters

Brand	FLUA
Type	LA111
Power	6W
Light color	WW
Color temperature	3000K
CRI	90

---

## Other options


Beam angle	/
Color temperature	2700K 4000K
Color	/
Appearance color	PAB-WBP/PAW-WWP

---

# FLUA®

3D module

Line drawing

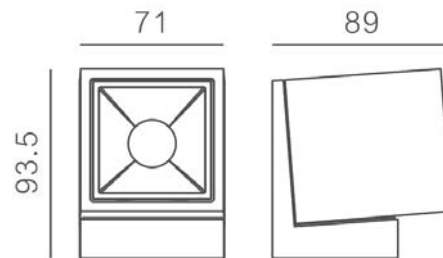

Unit: mm

## Instructions

