

FLUA®



RIGA S TRIMLESS



RIGA ,the newest family of embedded linear lights. As a supplement to linear lighting applications, RIGA provides more flexible and reliable solutions for space lighting design.The lamp and lamp body adopt a unique press-type buckle design, which is easy to install and maintain Ultra-narrow design reduces the visual effect of lamps Ordinary opening installation, borderless embedded installation optional

Designer	FLUA
Sales status	On Sale
Product classification	Interior
Model	112817A



Installation information

Area	Ceiling
Method	Recessed
Cut hole size	313*19mm
Embedded height	/

Technical general

System power	12W
Flux	645lm
Beam angle	23°
Material	Aluminum
Appearance color	PAB
Size	340*50*42.5mm
Adjustable angle	Not available
Ingress protection	IP20
Input voltage	100-240VAC
Electrical level	Class II

Photometric graph

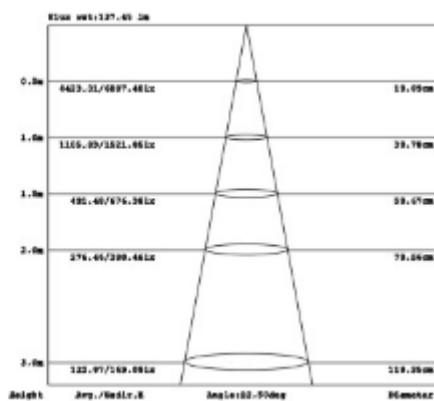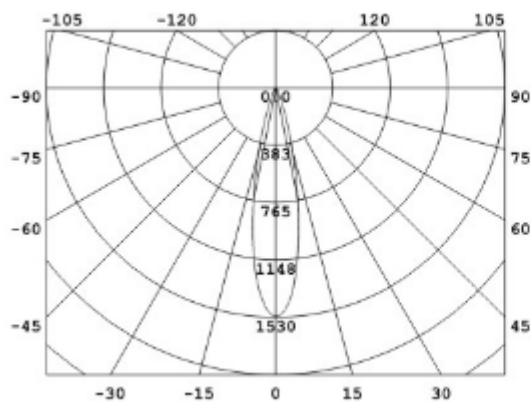

Electrical parameters

Driver brand	DRIARTE
Driver type	FLZN12W350P
Electrical installation	External

Light source parameters

Brand	OSRAM
Type	GW CSHPM1.CM
Power	10.9W
Light color	WW
Color temperature	3000K
CRI	90

Other options

Beam angle	/
Color temperature	2700K,4000K
Color	/
Appearance color	PAW,WGL

Dimming model	112817DT
Dimming mode	TRIAC dimming
Driver brand	DRIARTE
Driver type	FLMT12W350T
Input voltage	220-240VAC


Dimming model	112817DA
Dimming mode	DALI
Driver brand	LTECH
Driver type	SE-12-100-400-W1D
Input voltage	100-240VAC

Dimming model	112817DX
Dimming mode	1-10V dimming
Driver brand	LTECH
Driver type	SE-12-100-400-W1A
Input voltage	100-240VAC

3D module



Line drawing

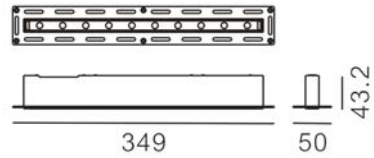

Unit: mm

Instructions

